

# Generation and Transmission Planning<sup>1</sup>

## Overview

### Generation Interconnection Planning

#### Existing Generation Mix

- As of June 30, 2022, PJM had a total installed capacity of 196,607.9 MW, of which 45,134.3 MW (23.0 percent) are coal fired steam units, 54,048.2 MW (27.5 percent) are combined cycle units and 33,452.6 MW (17.0 percent) are nuclear units. This measure of installed capacity differs from capacity market installed capacity because it includes energy only units, excludes all external units, and uses nameplate values for solar and wind resources.
- Of the 196,607.9 MW of installed capacity, 70,265.3 MW (35.7 percent) are from units older than 40 years, of which 34,527.3 MW (49.1 percent) are coal fired steam units, 191.0 MW (0.3 percent) are combined cycle units and 18,460.6 MW (26.3 percent) are nuclear units.

#### Generation Retirements<sup>2</sup>

- There are 51,797.6 MW of generation that have been, or are planned to be, retired between 2011 and 2024, of which 40,647.1 MW (78.5 percent) are coal fired steam units. Coal unit retirements are primarily a result of the inability of coal units to compete with efficient combined cycle units burning low cost natural gas.
- In the first six months of 2022, 5,557.7 MW of generation retired. The largest generator that retired in the first six months of 2022 was the 638.0 MW Avon Lake Unit 9 coal fired steam unit located in the ATSI Zone. Of the 5,557.7 MW of generation that retired, 1,300.0 MW (23.4 percent) were located in the DUKE Zone.
- As of June 30, 2022, there are 4,912.2 MW of generation that have requested retirement after June 30, 2022, of which 1,520.7 MW (31.0

percent) are located in the ATSI Zone. Of the generation requesting retirement in the ATSI Zone, 1,490.0 MW (98.0 percent) are coal fired steam units.

#### Generation Queue<sup>3</sup>

- There were 254,998.8 MW in generation queues, in the status of active, under construction or suspended, at the end of 2021. In the first six months of 2022, the AH2 queue window closed and the AI1 queue window opened. As projects move through the queue process, projects can be removed from the queue due to incomplete or invalid data, withdrawn by the market participant or placed in service. On June 30, 2022, there were 280,658.8 MW in generation queues, in the status of active, under construction or suspended, an increase of 25,660.0 MW (10.1 percent) from the end of 2021.<sup>4</sup>
- As of June 30, 2022, 7,554 projects, representing 801,933.6 MW, have entered the queue process since its inception in 1998. Of those, 1,037 projects, representing 79,364.4 MW, went into service. Of the projects that entered the queue process, 3,405 projects, representing 441,910.4 MW (55.1 percent of the MW) withdrew prior to completion. Such projects may create barriers to entry for projects that would otherwise be completed by taking up queue positions, increasing interconnection costs and creating uncertainty.
- As of June 30, 2022, 280,658.8 MW were in generation request queues in the status of active, under construction or suspended. Based on historical completion rates, 40,144.6 MW (14.3 percent) of new generation in the queue are expected to go into service.
- The number of queue entries increased during the past several years, primarily renewable projects. Of the 4,904 projects entered from January 2015 through June 2022, 3,634 projects (74.1 percent) were renewable. Of the 373 projects entered in the first six months of 2022, 254 projects (68.1 percent) were renewable. Renewable projects make up 75.3 percent of all projects in the queue and those projects account for 74.8 percent of

<sup>1</sup> Totals presented in this section include corrections to historical data and may not match totals presented in previous reports.

<sup>2</sup> See PJM. Planning. "Generator Deactivations," (Accessed on June 30, 2022) <<http://www.pjm.com/planning/services-requests/generator-deactivations.aspx>>.

<sup>3</sup> See PJM. Planning. "New Services Queue," (Accessed on June 30, 2022) <<https://www.pjm.com/planning/services-requests/interconnection-queues.aspx>>.

<sup>4</sup> The queue totals in this report are the winter net MW energy for the interconnection requests ("MW Energy") as shown in the queue.

the nameplate MW currently active, suspended or under construction in the queue as of June 30, 2022.

But of the 209,912.6 MW of renewable projects in the queue, only 11,745.5 MW (5.6 percent) of capacity resources are expected to go into service, based on both historical completion rates and ELCC derate factors for battery, wind and solar.

## Regional Transmission Expansion Plan (RTEP)

### Market Efficiency Process

- There are significant issues with PJM's cost/benefit analysis that should be addressed prior to approval of additional projects. PJM's cost/benefit analysis does not correctly account for the costs of increased congestion associated with market efficiency projects.
- Through June 30, 2022, PJM has completed four market efficiency cycles under Order No. 1000.<sup>5</sup>

### PJM MISO Interregional Market Efficiency Process (IMEP)

- PJM and MISO developed a process to facilitate the construction of interregional projects in response to the Commission's concerns about interregional coordination along the PJM-MISO seam. This process, called the Interregional Market Efficiency Process (IMEP), operates on a two year study schedule and is designed to address forward looking congestion.

But the use of an inaccurate cost/benefit method by PJM and the correct method by MISO results in an over allocation of the costs associated with joint PJM/MISO projects to PJM participants and in some cases approval of projects that do not pass an accurate cost-benefit test.

<sup>5</sup> See *Transmission Planning and Cost Allocation by Transmission Owning and Operating Public Utilities*, Order No. 1000, FERC Stats. & Regs. ¶ 31,323 (2011) (Order No. 1000), *order on reh'g*, Order No. 1000-A, 139 FERC ¶ 61,132 (2012).

### PJM MISO Targeted Market Efficiency Process (TMEP)

- PJM and MISO developed the Targeted Market Efficiency Process (TMEP) to facilitate the resolution of historic congestion issues that could be addressed through small, quick implementation projects.

### Supplemental Transmission Projects

- Supplemental projects are defined to be "transmission expansions or enhancements that are not required for compliance with PJM criteria and are not state public policy projects according to the PJM Operating Agreement. These projects are used as inputs to RTEP models, but are not required for reliability, economic efficiency or operational performance criteria, as determined by PJM."<sup>6</sup> Supplemental projects are exempt from the competitive planning process.
- The average number of supplemental projects in each expected in service year increased by 870.0 percent, from 20 for years 1998 through 2007 (pre Order No. 890) to 194 for years 2008 through 2022 (post Order 890).<sup>7</sup>

### End of Life Transmission Projects

- An end of life transmission project is a project submitted for the purpose of replacing existing infrastructure that is at, or is approaching, the end of its useful life. End of life transmission projects should be included in the RTEP process and should be subject to a transparent, robust and clearly defined mechanism to permit competition to build the project. Under the current approach, end of life projects are excluded from competition.

### Board Authorized Transmission Upgrades

- The Transmission Expansion Advisory Committee (TEAC) reviews internal and external proposals to improve transmission reliability throughout PJM. These proposals, which include reliability baseline, network, market efficiency and targeted market efficiency projects, as well as scope

<sup>6</sup> See PJM, "Transmission Construction Status," (Accessed on June 30, 2022) <<http://www.pjm.com/planning/rtep-upgrades-status/construct-status.aspx>>.

<sup>7</sup> See *Preventing Undue Discrimination and Preference in Transmission Service*, Order No. 890, 118 FERC ¶ 61,119, *order on reh'g*, Order No. 890-A, 121 FERC ¶ 61,297 (2007), *order on reh'g*, Order No. 890-B, 123 FERC ¶ 61,299 (2008), *order on reh'g*, Order No. 890-C, 126 FERC ¶ 61,228, *order on clarification*, Order No. 890-D, 129 FERC ¶ 61,126 (2009).

changes and project cancellations, but exclude supplemental and end of life projects, are periodically presented to the PJM Board of Managers for authorization.<sup>8</sup> In the first six months of 2022, the PJM Board approved \$515.4 million in upgrades. As of June 30, 2022, the PJM Board has approved \$39.4 billion in system enhancements since 1999.

## Transmission Competition

- The MMU makes several recommendations related to the competitive transmission planning process. The recommendations include improved process transparency, incorporation of competition between transmission and generation alternatives and the removal of barriers to competition from nonincumbent transmission. These recommendations would help ensure that the process is an open and transparent process that results in the most competitive solutions.
- On May 24, 2018, the PJM Markets and Reliability Committee (MRC) approved a motion that required PJM, with input from the MMU, to develop a comparative framework to evaluate the quality and effectiveness of competitive transmission proposals with binding cost containment proposals compared to proposals from incumbent and nonincumbent transmission companies without cost containment provisions.

## Qualifying Transmission Upgrades (QTU)

- A Qualifying Transmission Upgrade (QTU) is an upgrade to the transmission system that increases the Capacity Emergency Transfer Limit (CETL) into an LDA and can be offered into capacity auctions as capacity. Once a QTU is in service, the upgrade is eligible to continue to offer the approved incremental import capability into future RPM Auctions. As of June 30, 2022, no QTUs have cleared a Base Residual Auction or an Incremental Auction.

## Transmission Facility Outages

- PJM maintains a list of reportable transmission facilities. When the reportable transmission facilities need to be taken out of service, PJM transmission owners are required to report planned transmission facility outages as early as possible. PJM processes the transmission facility outage requests according to rules in PJM's Manual 3 to decide if the outage is on time or late and whether or not they will allow the outage.<sup>9</sup>
- There were 19,637 transmission outage requests submitted in the 2021/2022 planning period. Of the requested outages, 77.3 percent of the requested outages were planned for less than or equal to five days and 8.0 percent of requested outages were planned for greater than 30 days. Of the requested outages, 40.1 percent were late according to the rules in PJM's Manual 3.

## Recommendations

### Generation Retirements

- The MMU recommends that the question of whether Capacity Interconnection Rights (CIRs) should persist after the retirement of a unit be addressed. The rules need to ensure that incumbents cannot exploit control of CIRs to block or postpone entry of competitors.<sup>10</sup> (Priority: Low. First reported 2013. Status: Partially adopted, 2012.)

### Generation Queue

- The MMU recommends that barriers to entry be addressed in a timely manner in order to help ensure that the capacity market will result in the entry of new capacity to meet the needs of PJM market participants. (Priority: Low. First reported 2012. Status: Not adopted.)
- The MMU recommends improvements in queue management including that PJM establish a review process to ensure that projects are removed from the queue if they are not viable, as well as a process to allow commercially viable projects to advance in the queue ahead of projects

<sup>9</sup> See "PJM Manual 03: Transmission Operations," Rev. 62 (June 1, 2022).

<sup>10</sup> See Comments of the Independent Market Monitor for PJM, Docket No. ER12-1177-000 (March 12, 2012) <[http://www.monitoringanalytics.com/Filings/2012/IMM\\_Comments\\_ER12-1177-000\\_20120312.PDF](http://www.monitoringanalytics.com/Filings/2012/IMM_Comments_ER12-1177-000_20120312.PDF)>.

<sup>8</sup> Supplemental Projects, including the end of life subset of supplemental projects, do not require PJM Board of Managers authorization.

which have failed to make progress, subject to rules to prevent gaming.<sup>11</sup> (Priority: Medium. First reported 2013. Status: Partially adopted.)

- The MMU recommends continuing analysis of the study phase of PJM's transmission planning to reduce the need for postponements of study results, to decrease study completion times, and to improve the likelihood that a project at a given phase in the study process will successfully go into service.<sup>12</sup> (Priority: Medium. First reported 2014. Status: Partially adopted.)
- The MMU recommends outsourcing interconnection studies to an independent party to avoid potential conflicts of interest. Currently, these studies are performed by incumbent transmission owners under PJM's direction. This creates potential conflicts of interest, particularly when transmission owners are vertically integrated and the owner of transmission also owns generation. (Priority: Low. First reported 2013. Status: Not adopted.)

## Market Efficiency Process

- The MMU recommends that the market efficiency process be eliminated because it is not consistent with a competitive market design. (Priority: Medium. First reported 2019. Status: Not adopted.)
- The MMU recommends that, if the market efficiency process is retained, PJM modify the rules governing cost/benefit analysis, the evaluation process for selecting among competing market efficiency projects and cost allocation for economic projects in order to ensure that all costs, including increased congestion costs and the risk of project cost increases, in all zones are included in order to ensure that the correct metrics are used for defining benefits. (Priority: Medium. First reported 2018. Status: Not adopted.)

<sup>11</sup> Once implemented, the approved solutions from PJM's Interconnection Process Reform Task Force (IPRTF) should result in improvements in these areas.

<sup>12</sup> Ibid.

## Comparative Cost Framework

- The MMU recommends that PJM modify the project proposal templates to include data necessary to perform a detailed project lifetime financial analysis. The required data includes, but is not limited to: capital expenditure; capital structure; return on equity; cost of debt; tax assumptions; ongoing capital expenditures; ongoing maintenance; and expected life. (Priority: Medium. First reported 2020. Status: Not adopted.)

## Transmission Competition

- The MMU recommends, to increase the role of competition, that the exemption of supplemental projects from the Order No. 1000 competitive process be terminated and that the basis for all such exemptions be reviewed and modified to ensure that the supplemental project designation is not used to exempt transmission projects from a transparent, robust and clearly defined mechanism to permit competition to build such projects or to effectively replace the RTEP process. (Priority: Medium. First reported 2017. Status: Not adopted. Rejected by FERC.)<sup>13</sup>
- The MMU recommends, to increase the role of competition, that the exemption of end of life projects from the Order No. 1000 competitive process be terminated and that end of life transmission projects be included in the RTEP process and should be subject to a transparent, robust and clearly defined mechanism to permit competition to build such projects. (Priority: Medium. First reported 2019. Status: Not adopted. Rejected by FERC.)<sup>14</sup>
- The MMU recommends that PJM enhance the transparency and queue management process for nonincumbent transmission investment. Issues related to data access and complete explanations of cost impacts should be addressed. The goal should be to remove barriers to competition from nonincumbent transmission providers. (Priority: Medium. First reported 2015. Status: Not adopted.)

<sup>13</sup> The FERC accepted tariff provisions that exclude supplemental projects from competition in the RTEP. 162 FERC ¶ 61,129 (2018), *reh'g denied*, 164 FERC ¶ 61,217 (2018).

<sup>14</sup> In recent decisions addressing competing proposals on end of life projects, the Commission accepted a transmission owner proposal excluding end of life projects from competition in the RTEP process, 172 FERC ¶ 61,136 (2020), *reh'g denied*, 173 FERC ¶ 61,225 (2020), and rejected a proposal from PJM stakeholders that would have included end of life projects in competition in the RTEP process, 173 FERC ¶ 61,242 (2020).

- The MMU recommends that PJM continue to incorporate the principle that the goal of transmission planning should be the incorporation of transmission investment decisions into market driven processes as much as possible. (Priority: Low. First reported 2001. Status: Not adopted.)
- The MMU recommends the creation of a mechanism to permit a direct comparison, or competition, between transmission and generation alternatives, including which alternative is less costly and who bears the risks associated with each alternative. (Priority: Low. First reported 2013. Status: Not adopted.)
- The MMU recommends that PJM establish fair terms of access to rights of way and property, such as at substations, in order to remove any barriers to entry and permit competition between incumbent transmission providers and nonincumbent transmission providers in the RTEP. (Priority: Medium. First reported 2014. Status: Not adopted.)
- The MMU recommends that rules be implemented to permit competition to provide financing for transmission projects. This competition could reduce the cost of capital for transmission projects and significantly reduce total costs to customers. (Priority: Low. First reported 2013. Status: Not adopted.)
- The MMU recommends that storage resources not be includable as transmission assets for any reason. (Priority: High. First reported 2020. Status: Not adopted.)

## Cost Allocation

- The MMU recommends a comprehensive review of the ways in which the solution based dfax is implemented. The goal for such a process would be to ensure that the most rational and efficient approach to implementing the solution based dfax method is used in PJM. Such an approach should allocate costs consistent with benefits and appropriately calibrate the incentives for investment in new transmission capability. No replacement approach should be approved until all potential alternatives, including the status quo, are thoroughly reviewed. (Priority: Medium. First reported 2020. Status: Not adopted.)

- The MMU recommends consideration of changing the minimum distribution factor in the allocation from 0.01 to 0.00 and adding a threshold minimum usage impact on the line.<sup>15</sup> (Priority: Medium. First reported 2015. Status: Not adopted.)

## Transmission Line Ratings

- The MMU recommends that all PJM transmission owners use the same methods to define line ratings and that all PJM transmission owners implement dynamic line ratings (DLR), subject to NERC standards and guidelines, subject to review by NERC, PJM and the MMU, and approval by FERC. (Priority: Medium. First reported 2019. Status: Not adopted.)

## Transmission Facility Outages

- The MMU recommends that PJM reevaluate all transmission outage tickets as on time or late as if they were new requests when an outage is rescheduled, and apply the standard rules for late submissions to any such outages. (Priority: Low. First reported 2014. Status: Not adopted.)
- The MMU recommends that PJM draft a clear definition of the congestion analysis required for transmission outage requests to include in Manual 3 after appropriate review. (Priority: Low. First reported 2015. Status: Not adopted.)
- The MMU recommends that PJM modify the rules to reduce or eliminate the approval of late outage requests submitted or rescheduled after the FTR auction bidding opening date. (Priority: Low. First reported 2015. Status: Not adopted.)
- The MMU recommends that PJM not permit transmission owners to divide long duration outages into smaller segments to avoid complying with the requirements for long duration outages. (Priority: Low. First reported 2015. Status: Not adopted.)

<sup>15</sup> See 2015 State of the Market Report for PJM, Volume II, Section 12: Generation and Transmission Planning, at 463, Cost Allocation Issues.

## Conclusion

The goal of PJM market design should be to enhance competition and to ensure that competition is the core element of all PJM markets. But transmission investments have not been fully incorporated into competitive markets. The construction of new transmission facilities has significant impacts on the energy and capacity markets. But when generating units retire or load increases, there is no market mechanism in place that would require or even permit direct competition between transmission and generation to meet loads in the affected area. In addition, despite FERC Order No. 1000, there is not yet a transparent, robust and clearly defined mechanism to permit competition to build transmission projects, to ensure that competitors provide a total project cost cap, or to obtain least cost financing through the capital markets.

The MMU recognizes that the Commission has issued orders that are inconsistent with the recommendations of the MMU and that PJM cannot unilaterally modify those directives. It remains the recommendation of the MMU that the PJM rules for competitive transmission development through the RTEP should build upon FERC Order No. 1000 to create real competition between incumbent transmission providers and nonincumbent transmission providers. The ability of transmission owners to block competition for supplemental projects and end of life projects and the reasons for that policy should be reevaluated. PJM should enhance the transparency and queue management process for nonincumbent transmission investment. Issues related to data access and complete explanations of cost impacts should be addressed. The goal should be to remove barriers to competition from nonincumbent transmission.

Another element of opening competition would be to consider transmission owners' ownership of property and rights of way at or around transmission substations. In many cases, the land acquired included property intended to support future expansion of the grid. Incumbents have included the costs of the property in their rate base, paid for by customers. PJM now has the responsibility for planning the development of the grid under its RTEP process. Property bought to facilitate future expansion should be a part of the RTEP process and be made available to all providers on equal terms.

The process for determining the reasonableness or purpose of supplemental transmission projects that are asserted to be not needed for reliability, economic efficiency or operational performance as defined under the RTEP process needs additional oversight and transparency. If there is a need for a supplemental project, that need should be clearly defined and there should be a transparent, robust and clearly defined mechanism to permit competition to build the project. If there is no defined need for of a supplemental project for reliability, economic efficiency or operational performance then the project should not be included in rates.

Managing the generation queues is a complex process. The PJM queue evaluation process has been incrementally improved in recent years. In 2020, PJM conducted interconnection process workshops and in 2021, the Interconnection Process Reform Task Force (IPRTF) was created to explore ways to improve overall queue management. The proposal endorsed by the IPRTF in 2022 includes significant modifications to the interconnection process designed to address some of the key underlying issues and significantly improve the efficiency of the process. These modifications include process efficiency enhancements, recognition of project clusters affecting the same transmission facilities, incentives to reduce the entry of speculative projects in the queue, and incentives to remove projects that are not expected to reach commercial operation. The proposed solution should help to reduce backlog and to remove projects that are not viable earlier to help improve the overall efficiency of the queue process. On June 14, 2022, PJM filed tariff changes to incorporate the endorsed modifications to the interconnection queue process.<sup>16</sup>

The proposed modifications to the queue process will need to be evaluated to determine if they successfully remove projects from the queue if they are not viable, and allow commercially viable projects to advance in the queue ahead of projects which have failed to make progress. The behavior of project developers also creates issues with queue management. When developers put multiple projects in the queue to maintain their own optionality while planning to build only one they also affect all the projects that follow them in the queue. Project developers may also enter speculative projects in the queue

<sup>16</sup> See *PJM*, Docket No. ER22-2110 (June 14, 2022).

and then put the project in suspended status while they address financing. The impacts of such behavior and the incentives for such behavior are addressed in the new process which includes nonrefundable fees, credit requirements, enhanced site control, elimination of the ability to suspend a project and milestone requirements. These aspects of the proposed interconnection process should continue to be evaluated to ensure that they are having the desired effect on project developer behavior. The PJM queue evaluation process should continue to be improved to help ensure that barriers to competition for new generation investments are not created. Issues that need to be addressed include the ownership rights to CIRs and whether transmission owners should perform interconnection studies.

The roles and efficiency of PJM, TOs and developers in the queue process all need to be examined and enhanced in order to help ensure that the queue process can function effectively and efficiently as the gateway to competition in the energy and capacity markets and not as a barrier to competition.

The Commission should require PJM, for example, to enhance the transparency and queue management process for nonincumbent transmission investment. Issues related to data access and complete explanations of cost impacts should be addressed. The goal should be to remove barriers to competition from nonincumbent transmission.

The addition of a planned transmission project changes the parameters of the capacity auction for the area, changes the amount of capacity needed in the area, changes the capacity market supply and demand fundamentals in the area and may effectively forestall the ability of generation to compete. But there is no mechanism to permit a direct comparison, let alone competition, between transmission and generation alternatives. There is no mechanism to evaluate whether the generation or transmission alternative is less costly, whether there is more risk associated with the generation or transmission alternatives, or who bears the risks associated with each alternative. Creating such a mechanism should be an explicit goal of PJM market design.

The current market efficiency process does exactly the opposite by permitting transmission projects to be approved without competition from generation. The broader issue is that the market efficiency project approach explicitly allows transmission projects to compete against future generation projects, but without allowing the generation projects to compete. Projecting speculative transmission related benefits for 15 years based on the existing generation fleet and existing patterns of congestion eliminates the potential for new generation to respond to market signals. The market efficiency process allows assets built under the cost of service regulatory paradigm to displace generation assets built under the competitive market paradigm. In addition, there are significant issues with PJM's current cost/benefit analysis which cause it to consistently overstate the potential benefits of market efficiency projects. The market efficiency process is misnamed. The MMU recommends that the market efficiency process be eliminated.

In addition, the use of an inaccurate cost-benefit method by PJM and the correct method by MISO results in an over allocation of the costs associated with joint PJM/MISO projects to PJM participants and in some cases approval of projects that do not pass an accurate cost-benefit test.

If it is retained, there are significant issues with PJM's cost/benefit analysis that should be addressed prior to approval of additional projects. The current cost/benefit analysis for a regional project, for example, explicitly and incorrectly ignores the increased congestion in zones that results from an RTEP project when calculating the energy market benefits. All costs should be included in all zones and LDAs. The definition of benefits should also be reevaluated.

The cost/benefit analysis should also account for the fact that the transmission project costs are not subject to cost caps and may exceed the estimated costs by a wide margin. When actual costs exceed estimated costs, the cost benefit analysis is effectively meaningless and low estimated costs may result in inappropriately favoring transmission projects over market generation projects. The risk of cost increases for transmission projects should be incorporated in the cost benefit analysis.

There are currently no market incentives for transmission owners to plan, submit and complete transmission outages in a timely and efficient manner. Requiring transmission owners to pay does not create an effective incentive when those payments are passed through to transmission customers. The process for the submission of planned transmission outages needs to be carefully reviewed and redesigned to limit the ability of transmission owners to submit transmission outages that are late for FTR auction bid submission dates and are late for the day-ahead energy market and that have large and unnecessary impacts on the PJM energy market. The submission of late transmission outages can inappropriately affect market outcomes when market participants do not have the ability to modify market bids and offers. The PJM process for evaluating the congestion impact of transmission outages needs to be clearly defined and upgraded to provide for management of transmission outages to minimize market impacts. The MMU continues to recommend that PJM draft a clear definition of the congestion analysis required for transmission outage requests that is incorporated in the PJM Market Rules.

The treatment by PJM and Dominion Virginia Power of the outage for the Lanexa – Dunnsville Line illustrates some of the issues with the current process. The outage was submitted and delayed more than once. PJM's analysis of expected congestion did not highlight the magnitude of the issue. Dominion Virginia Power did not stage the outage so as to minimize market disruption and congestion.

## Generation Interconnection Planning

### Existing Generation Mix

Table 12-1 shows the existing PJM capacity by control zone and unit type.<sup>17</sup> As of June 30, 2022, PJM had an installed capacity of 196,607.9 MW, of which 45,134.3 MW (23.0 percent) are coal fired steam units, 54,048.2 MW (27.5 percent) are combined cycle units and 33,452.6 MW (17.0 percent) are nuclear units. This measure of installed capacity differs from capacity market installed capacity because it includes energy only units, external units and uses nameplate values for solar and wind resources.

The AEP Zone has the most installed capacity of any PJM zone. Of the 196,607.9 MW of PJM installed capacity, 33,247.1 MW (16.9 percent) are in the AEP Zone, of which 13,463.0 MW (40.5 percent) are coal fired steam units, 8,469.0 MW (25.5 percent) are combined cycle units and 2,071.0 MW (6.2 percent) are nuclear units.

<sup>17</sup> The unit type RICE refers to Reciprocating Internal Combustion Engines.



Table 12-1 Existing capacity: June 30, 2022 (By zone and unit type (MW))<sup>18</sup>

Zone	CT - Combined		CT - Natural		CT - Oil		Fuel Cell	Hydro - Pumped		Hydro - Run of		RICE - Natural			RICE - Oil		RICE - Other		Solar + Storage		Solar + Wind		Steam - Coal			Steam - Natural		Steam - Oil		Steam - Other		Wind + Storage		Total
	Battery	Cycle	Gas	CT - Oil	Other	Storage		River	Nuclear	Gas	Oil	Other	Solar	Storage	Wind	Coal	Gas	- Oil	- Other	Wind	Storage													
ACEC	0.0	781.6	544.7	26.0	0.0	1.6	0.0	0.0	0.0	0.0	4.0	5.9	67.1	0.0	0.0	239.9	0.0	0.0	0.0	7.5	0.0	1,678.2												
AEP	4.0	8,469.0	4,108.2	16.2	4.8	0.0	66.0	420.9	2,071.0	0.0	0.0	20.4	364.7	0.0	0.0	13,463.0	738.0	0.0	0.0	3,500.9	0.0	33,247.1												
APS	80.4	2,843.7	1,223.3	0.0	2.0	0.0	0.0	129.2	0.0	29.6	0.0	18.3	134.3	0.0	0.0	5,299.0	0.0	0.0	0.0	985.1	0.0	10,744.9												
ATSI	0.0	4,647.5	958.0	608.0	6.4	0.0	0.0	0.0	2,134.0	0.0	18.5	42.5	0.0	0.0	1,490.0	325.0	0.0	136.0	0.0	0.0	10,365.9													
BGE	0.0	0.0	267.6	228.8	0.0	0.0	0.0	0.4	1,716.0	0.0	0.0	4.2	1.1	0.0	1,578.0	143.5	397.0	57.0	0.0	0.0	4,393.6													
COMED	110.0	3,471.1	6,673.3	226.2	0.0	0.0	0.0	0.0	10,473.5	0.0	0.0	15.0	9.0	0.0	3,156.0	1,326.0	0.0	0.0	5,031.0	0.0	30,491.1													
DAY	0.0	0.0	897.5	0.0	0.0	0.0	0.0	0.0	0.0	0.0	34.0	0.0	36.1	0.0	0.0	0.0	0.0	0.0	0.0	0.0	967.6													
DUKE	18.0	522.2	598.0	56.0	0.0	0.0	0.0	112.0	0.0	0.0	0.0	4.8	200.0	0.0	0.0	1,252.0	47.0	0.0	0.0	0.0	2,810.0													
DUQ	0.0	101.0	0.0	15.0	0.0	0.0	0.0	6.3	1,777.0	14.4	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1,913.7													
DOM	0.0	9,138.0	3,835.3	256.4	10.0	0.0	3,003.0	586.3	3,581.3	0.0	39.0	106.4	3,116.9	0.0	0.0	3,499.2	35.0	800.0	368.4	587.0	0.0	28,962.2												
DPL	0.0	1,742.5	978.2	478.2	0.0	30.0	0.0	0.0	0.0	0.0	88.0	14.1	320.4	0.0	0.0	410.0	710.0	153.0	70.0	0.0	0.0	4,994.4												
EKPC	0.0	0.0	774.0	0.0	0.0	0.0	0.0	136.0	0.0	0.0	0.0	0.0	0.0	0.0	1,687.0	0.0	0.0	0.0	0.0	0.0	2,597.0													
JCPLC	40.0	2,229.5	531.1	225.6	0.0	0.4	140.0	0.0	0.0	0.0	0.0	14.1	396.2	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	3,577.0												
MEC	0.0	2,595.0	2.0	398.5	0.0	0.0	0.0	19.0	0.0	0.0	0.0	30.9	0.0	0.0	115.0	0.0	0.0	60.0	0.0	0.0	3,220.4													
OVEC	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	2,388.8	0.0	0.0	0.0	0.0	0.0	2,388.8													
PECO	0.0	4,089.0	0.0	828.0	0.0	0.0	1,070.0	572.0	4,546.8	0.0	2.0	0.9	3.0	0.0	0.0	0.0	762.0	0.0	103.0	0.0	11,976.7													
PE	28.4	1,900.0	350.5	57.0	0.0	0.0	513.0	77.8	0.0	120.1	28.0	17.8	13.5	0.0	0.0	6,053.5	610.0	0.0	42.0	1,100.4	0.0	10,912.0												
PEPCO	0.0	1,736.5	764.2	308.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	8.7	2.5	0.0	0.0	0.0	1,164.1	0.0	52.0	0.0	4,036.0													
PPL	20.0	5,558.5	286.6	36.0	20.6	0.0	0.0	706.6	2,520.0	12.0	5.0	14.7	35.0	0.0	0.0	2,547.9	2,449.0	0.0	29.0	216.5	0.0	14,457.4												
PSEG	7.7	4,223.1	958.2	0.0	0.0	0.0	0.0	5.0	3,493.0	0.0	0.0	9.0	230.3	0.0	0.0	0.0	3.0	0.0	179.1	0.0	9,108.3													
XIC	0.0	0.0	670.6	0.0	0.0	0.0	0.0	0.0	1,140.0	0.0	0.0	0.0	0.0	0.0	1,955.0	0.0	0.0	0.0	0.0	0.0	3,765.6													
Total	308.5	54,048.2	24,421.3	3,763.9	43.8	32.0	4,792.0	2,771.5	33,452.6	176.1	218.5	327.6	4,930.1	0.0	0.0	45,134.3	8,312.6	1,350.0	1,096.5	11,428.4	0.0	196,607.9												

<sup>18</sup> The capacity described in this section refers to all capacity in PJM at the summer installed capacity rating, regardless of whether the capacity entered the RPM Auction.

Table 12-2 shows the installed capacity by state for each fuel type. Pennsylvania has the most installed capacity of any PJM state. Of the 196,607.9 MW of installed capacity, 47,985.6 MW (24.4 percent) are in Pennsylvania, of which 8,716.4 MW (18.2 percent) are coal fired steam units, 18,087.2 MW (37.7 percent) are combined cycle units and 8,843.8 MW (18.4 percent) are nuclear units.

**Table 12-2 Existing capacity: June 30, 2022 (By state and unit type (MW))**

State	Battery	Combined Cycle	CT - Natural Gas	CT - Oil	CT - Other	Fuel Cell	Hydro - Pumped Storage	Hydro - Run of River	Nuclear	RICE - Natural Gas	RICE - Oil	RICE - Other	Solar	Solar + Storage	Solar + Wind	Steam - Coal	Steam - Natural Gas	Steam - Oil	Steam - Other	Wind	Wind + Storage	Total
DC	0.0	19.5	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	19.5
DE	0.0	742.5	325.5	116.3	0.0	30.0	0.0	0.0	0.0	0.0	0.0	8.1	0.0	0.0	0.0	410.0	710.0	0.0	70.0	0.0	0.0	2,412.4
IL	110.0	3,471.1	6,673.3	226.2	0.0	0.0	0.0	0.0	10,473.5	0.0	0.0	15.0	9.0	0.0	0.0	3,156.0	1,326.0	0.0	0.0	5,031.0	0.0	30,491.1
IN	0.0	1,835.0	441.4	0.0	0.0	0.0	0.0	8.2	0.0	0.0	0.0	3.2	130.1	0.0	0.0	3,923.8	0.0	0.0	0.0	2,353.2	0.0	8,694.9
KY	0.0	0.0	1,618.1	0.0	0.0	0.0	0.0	136.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1,687.0	278.0	0.0	0.0	0.0	0.0	3,719.1
MD	20.0	2,717.0	1,684.5	552.7	0.0	0.0	0.0	0.4	1,716.0	0.0	76.0	18.9	343.3	0.0	0.0	1,758.0	1,307.6	550.0	109.0	295.0	0.0	11,148.4
MI	0.0	2,194.0	0.0	0.0	4.8	0.0	0.0	11.8	2,071.0	0.0	0.0	3.2	4.6	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	4,289.4
NC	0.0	165.0	0.0	0.0	0.0	0.0	0.0	315.0	0.0	0.0	18.0	0.0	1,006.5	0.0	0.0	0.0	0.0	0.0	0.0	208.0	0.0	1,712.5
NJ	47.7	7,234.2	2,034.0	251.6	0.0	2.0	140.0	5.0	3,493.0	0.0	4.0	29.0	693.6	0.0	0.0	239.9	3.0	0.0	179.1	7.5	0.0	14,363.5
OH	22.0	8,609.7	4,201.2	680.2	6.4	0.0	0.0	200.0	2,134.0	0.0	47.0	47.3	386.1	0.0	0.0	8,310.0	47.0	0.0	136.0	1,147.7	0.0	25,974.6
PA	49.9	18,087.2	1,526.5	1,334.5	20.6	0.0	1,583.0	1,445.7	8,843.8	176.1	40.5	82.6	116.5	0.0	0.0	8,716.4	4,146.0	0.0	234.0	1,582.3	0.0	47,985.6
TN	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
VA	0.0	8,973.0	4,172.3	591.4	12.0	0.0	3,069.0	460.1	3,581.3	0.0	33.0	112.4	2,220.4	0.0	0.0	2,494.2	495.0	800.0	368.4	12.0	0.0	27,394.5
WV	58.9	0.0	1,073.9	11.0	0.0	0.0	0.0	189.3	0.0	0.0	0.0	8.0	20.0	0.0	0.0	12,484.0	0.0	0.0	0.0	791.7	0.0	14,636.8
XIC	0.0	0.0	670.6	0.0	0.0	0.0	0.0	0.0	1,140.0	0.0	0.0	0.0	0.0	0.0	0.0	1,955.0	0.0	0.0	0.0	0.0	0.0	3,765.6
Total	308.5	54,048.2	24,421.3	3,763.9	43.8	32.0	4,792.0	2,771.5	33,452.6	176.1	218.5	327.6	4,930.1	0.0	0.0	45,134.3	8,312.6	1,350.0	1,096.5	11,428.4	0.0	196,607.9

Table 12-3 and Figure 12-1 show the age of existing PJM generators, by unit type, as of June 30, 2022. Of the 196,607.9 MW of installed capacity, 70,265.3 MW (35.7 percent) are from units older than 40 years, of which 34,527.3 MW (49.1 percent) are coal fired steam units, 191.0 MW (0.3 percent) are combined cycle units and 18,460.6 MW (26.3 percent) are nuclear units.

**Table 12-3 Capacity (MW) by unit type and age (years): June 30, 2022**

Age (years)	Battery	Combined Cycle	CT - Natural Gas	CT - Oil	CT - Other	Fuel Cell	Hydro - Pumped Storage	Hydro - Run of River	Nuclear	RICE - Natural Gas	RICE - Oil	RICE - Other	Solar	Solar + Storage	Solar + Wind	Steam - Coal	Steam - Natural Gas	Steam - Oil	Steam - Other	Wind	Wind + Storage	Total
Less than 20	308.5	45,314.1	5,499.3	0.0	43.8	32.0	0.0	294.0	0.0	164.1	20.0	242.5	4,930.1	0.0	0.0	3,475.0	82.0	0.0	47.4	11,404.4	0.0	71,857.1
20 to 40	0.0	8,543.1	18,417.7	960.0	0.0	0.0	3,003.0	430.4	14,992.0	12.0	25.0	85.1	0.0	0.0	0.0	7,132.0	18.0	0.0	843.1	24.0	0.0	54,485.4
40 to 60	0.0	191.0	504.3	2,803.9	0.0	0.0	1,789.0	340.0	18,460.6	0.0	173.5	0.0	0.0	0.0	0.0	31,825.5	6,451.1	1,350.0	0.0	0.0	0.0	63,888.9
Greater than 60	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1,707.1	0.0	0.0	0.0	0.0	0.0	0.0	0.0	2,701.8	1,761.5	0.0	206.0	0.0	0.0	6,376.4
Total	308.5	54,048.2	24,421.3	3,763.9	43.8	32.0	4,792.0	2,771.5	33,452.6	176.1	218.5	327.6	4,930.1	0.0	0.0	45,134.3	8,312.6	1,350.0	1,096.5	11,428.4	0.0	196,607.9

Figure 12-1 Capacity (MW) by age (years): June 30, 2022

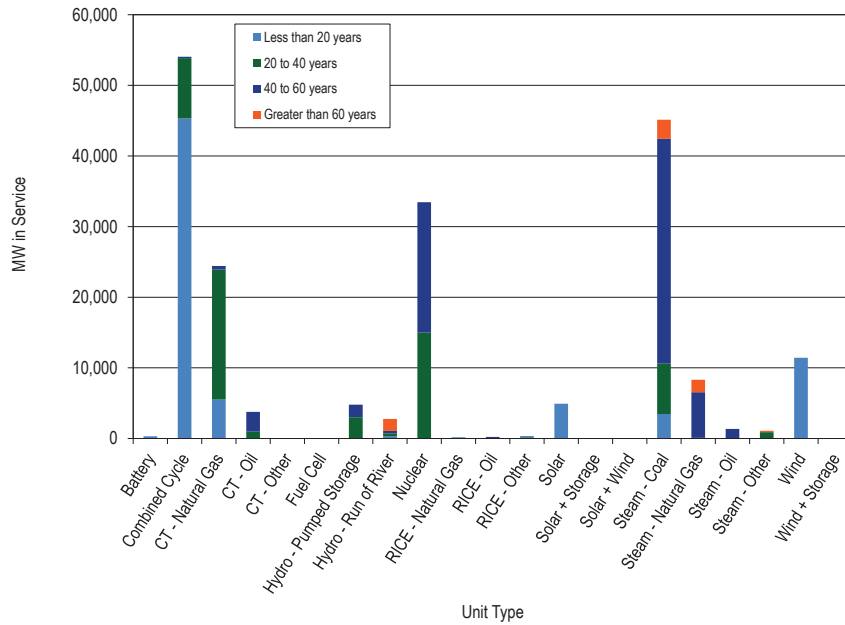


Figure 12-2 is a map of units, less than 20 MW in size that came online between January 1, 2011, and June 30, 2022. A mapping to these unit names is in Table 12-4.

Figure 12-2 Map of unit additions (less than 20 MW): January 1, 2011 through June 30, 2022

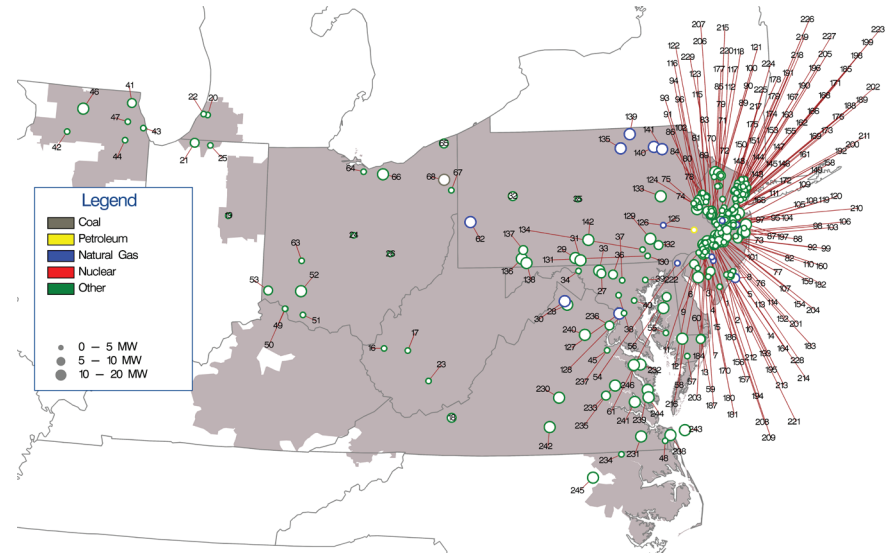
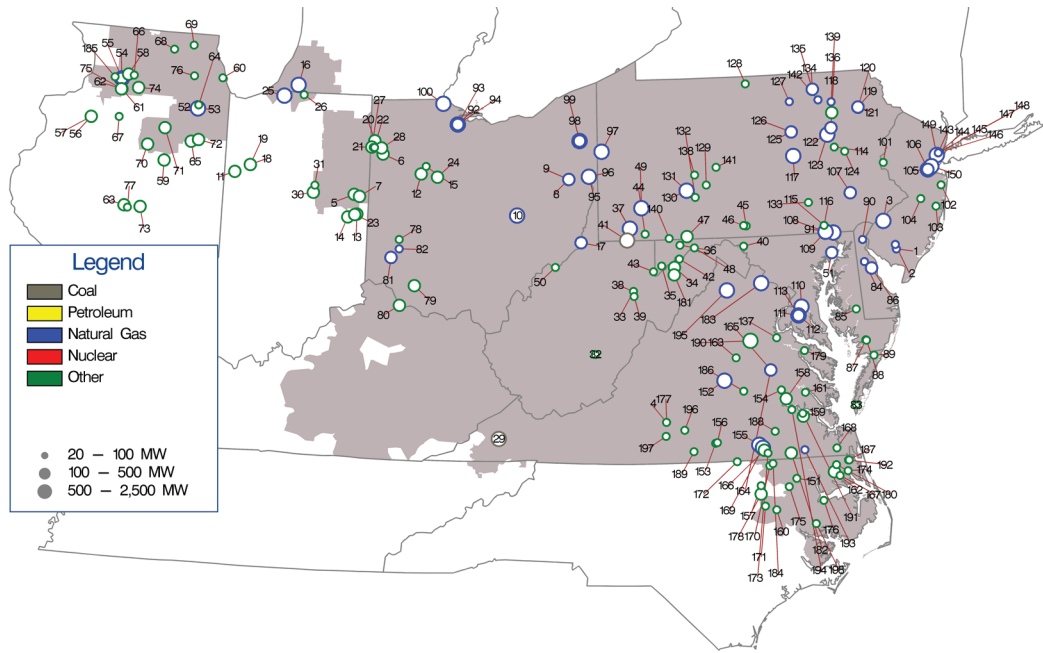


Table 12-4 Unit identification for map of unit additions (less than 20 MW): January 1, 2011 through June 30, 2022

ID	Unit	ID	Unit	ID	Unit	ID	Unit
1	ACE CAPE MAY COUNTY 1 LF	56	DPL CHURCH HILL 1 SP	111	JC OLD BRIDGE 1 SP	166	PS ESSEX 105 CT
2	ACE CATES ROAD 2 SP	57	DPL COSTEN 1 SP	112	JC PAUCH 3 SP	167	PS FAIRLAWN SOLAR 1 SP
3	ACE CEDAR BRANCH 1 SP	58	DPL HEBRON 1 SP	113	JC PEMBERTON 1 SP	168	PS FOODBANK 1 SP
4	ACE EGG HARBOR-KELLOGG 1 FC	59	DPL WORCESTER NORTH 1 SP	114	JC PEMBERTON 2 SP	169	PS FORTY NINTH SOLAR 1 SP
5	ACE GALLOWAY LANDFILL 2 SP	60	DPL WORCESTER SOUTH 2 SP	115	JC QUAKERTOWN 9 SP	170	PS GLOUCESTER SOLAR 1 SP
6	ACE GEMS LANDFILL 1 SP	61	DPL WYE MILLS 3 SP	116	JC RICHLINE 3 SP	171	PS HACKENSACK 1 SP
7	ACE MAYS LANDING 1 SP	62	DUQ PIT MICROGRID 1 CT	117	JC RINGOES 1 SP	172	PS HIGHLAND PARK 3 BT
8	ACE MIDTOWN THERMAL 2 CT	63	FE DOVETAIL 1 CT	118	JC SUSSEX 1 LF	173	PS HIGHLAND PARK 4 SP
9	ACE OAK FAIRTON 1 SP	64	FE ERIE COUNTY 1 LF	119	JC TINTON FALLS 3 SP	174	PS HILLSDALE SOLAR 1 SP
10	ACE PEAR STREET 1 SP	65	FE GENEVA 1 LF	120	JC UPPER FREEHOLD 1 SP	175	PS HINCHMANS SOLAR 1 SP
11	ACE PILESGROVE 1 SP	66	FE LORAIN 1 LF	121	JC WANTAGE 2 SP	176	PS HOBOKEN SOLAR 2 SP
12	ACE PILESGROVE 2 SP	67	FE MAHONING 1 LF	122	JC WARREN 1 SP	177	PS HOPEWELL 1 SP
13	ACE PITTSBORO 1 SP	68	FE WARREN-EVERGREEN 1 CT	123	JC WASHBURN AVE 4 SP	178	PS HOPEWELL 2 BT
14	ACE SEASHORE 1 SP	69	JC AUGUSTA 1 SP	124	ME GLENDON 1 LF	179	PS JACKSON SOLAR 1 SP
15	ACE TANSBORO ROAD 1 FC	70	JC BEAVER RUN 3 SP	125	ME READING HOSPITAL 1 CT	180	PS KINSLEY BEAVER 2 SP
16	AEP BALLS GAP 1 BT	71	JC BERKSHIRE 2 SP	126	PE MORRIS ROAD 1 D	181	PS KINSLEY DEPTFORD 1 SP
17	AEP CHARLESTON 1 LF	72	JC BERNARDS TOWNSHIP 1 SP	127	PEP CAPITAL POWER PLANT 1 CT	182	PS KUSER SOLAR 1 SP
18	AEP CLOYDS MT 1 LF	73	JC BRICKYARD 4 SP	128	PEP ROLLINS AVENUE 3 SP	183	PS LANDFILL 5 SP
19	AEP DEERCREEK 1 SP	74	JC COPPER HILL 4 SP	129	PL DART CONTAINER 1-2 LF	184	PS LAWN SIDE 14 BT
20	AEP EAST WATERVLIET 1 SP	75	JC CYPHERS ROAD 5 SP	130	PL HOLTWOOD 11	185	PS LEONIA SOLAR 1 SP
21	AEP OLIVE 1 SP	76	JC DIXSOLAR 51 SP	131	PL HOLTWOOD 13	186	PS LUMBERTON STACY HAINES 5 SP
22	AEP ORCHARD HILLS 1 LF	77	JC DIXSOLAR 52 SP	132	PL KEYSTONE 1 SP	187	PS MANTUA CREEK 7 BT
23	AEP RALEIGH COUNTY 1 LF	78	JC DOMIN LANE 1 SP	133	PL PA SOLAR 1 SP	188	PS MARION SOLAR 1 SP
24	AEP TRENT 1 BT	79	JC DURBAN AVENUE 1 SP	134	PL TURKEY HILL 1 WF	189	PS MATRIX PA SOLAR 2 SP
25	AEP TWINBRANCH 1 SP	80	JC E FLEMINGTON 5 SP	135	PN ALPACA GLORY BARN 1 D	190	PS MAYWOOD SOLAR 1 SP
26	AEP ZANESVILLE 2 LF	81	JC EAST AMWELL 7 SP	136	PN GARRETT 1 BT	191	PS METRO HQ 2 SP
27	AP BAKER POINT 1 SP	82	JC EGYPT 3 SP	137	PN LAUREL HIGHLANDS 2 LF	192	PS MIDDLESEX 1 SP
28	AP DOUBLE TOLLGATE SP	83	JC FISCHER 8 SP	138	PN MEYERSDALE 2 BT	193	PS MILL CREEK 1 SP
29	AP ELK HILL 1 SP	84	JC FOUL RIFT ROAD 1 SP	139	PN MILAN ENERGY 1 D	194	PS MOORESTOWN 1 SP
30	AP HP HOOD 1 CT	85	JC FRANKFORD 4 SP	140	PN NORTH MESHOPPEN 1 CT	195	PS MT LAUREL 1 SP
31	AP LETZBURG - ELK HILL 2 SP	86	JC FRANKLIN 7 SP	141	PN OXBOW CREEK ENERGY CENTER 1 D	196	PS NEW MILFORD SOLAR 1 SP
32	AP MAHONING CREEK 1 H	87	JC FREEMALL 1 FC	142	PN WHITETAIL 1 SP	197	PS NEW ROAD 1 SP
33	AP MT ST MARYS PV PARK 2 SP	88	JC FRENCHES 2 SP	143	PS ALDENE SOLAR 1 SP	198	PS NEWARK SOLAR 1 SP
34	AP PINESBURG 1 SP	89	JC FRENCHTOWN 1 SP	144	PS ATHENIA SOLAR 1 SP	199	PS NEWARK SOLAR 3 SP
35	AP STATE COLLEGE 1 BT	90	JC FRENCHTOWN 2 SP	145	PS BAYONNE 1 SP	200	PS NIXON LANE 2 SP
36	AP UNION BRIDGE 1 SP	91	JC FRENCHTOWN 3 SP	146	PS BAYONNE SOLAR 2 SP	201	PS NORTH AMERICAN 4 SP
37	BC ALPHA RIDGE 1 LF	92	JC HANOVER 2 SP	147	PS BELLEVILLE SOLAR 1 SP	202	PS NORTH AVE SOLAR 1 SP
38	BC BRIGHTON DAM 1 H	93	JC HARMONY 1 SP	148	PS BENNETTS SOLAR 1 SP	203	PS OWENS CORNING 1 SP
39	BC KINGSVILLE 1 SP	94	JC HIGH STREET 6 SP	149	PS BLACK ROCK 1 SP	204	PS PARKLANDS 1 SP
40	BC MILLERSVILLE 1 LF	95	JC HOFFMAN STATION ROAD 2 SP	150	PS BRIDGEWATER SOLAR 2 SP	205	PS PATERSON PLANK ROAD 1 SP
41	COM COUNTRYSIDE 1 LF	96	JC HOLLAND 4 SP	151	PS CALDWELL PUMP 2 BT	206	PS PENNINGTON 3 BT
42	COM DIXON LEE 5 LF	97	JC HOLMDEL 9 SP	152	PS CAMPUS DRIVE 2 SP	207	PS PENNINGTON 4 SP
43	COM GRAND RIDGE 6 BT	98	JC HOWELL 1 SP	153	PS CEDAR GROVE SOLAR 1 SP	208	PS PENNSAUKEN 1 LF
44	COM MAGID GLOVE 1 BT	99	JC JACOBSTOWN 1 SP	154	PS CEDAR LANE FLORENCE 6 SP	209	PS PENNSAUKEN 3 SP
45	COM MORRIS 1 LF	100	JC JUNCTION ROAD 6 SP	155	PS COOK ROAD SOLAR 2 SP	210	PS PRINCETON HOSPITAL 1 CT
46	COM ORCHARD 1 LF	101	JC LAKEHURST 3 SP	156	PS COOPER HOSPITAL 1 BT	211	PS RARITAN CENTER 3 SP
47	COM SOLBERG 1 BT	102	JC LEBANON 1 SP	157	PS COOPER HOSPITAL 15 SP	212	PS REEVES EAST 3 SP
48	COM STERLING RAIL 1 BT	103	JC LEGLER LANDFILL 7 SP	158	PS CRANBURY 2 SP	213	PS REEVES SOUTH 1 SP
49	DEOK BECKJORD 1 BT	104	JC MANALAPAN 1 SP	159	PS CROSSWIC 1 SP	214	PS REEVES WEST 4 SP
50	DEOK BECKJORD 2 BT	105	JC MILLHURST 3 SP	160	PS CROSSWIC 2 SP	215	PS RIDER UNIVERSITY 3 SP
51	DEOK BROWN COUNTY 1 LF	106	JC MUDDY FORGE 3 SP	161	PS DEVILSBROOK 1 SP	216	PS RIVER ROAD 2 SP
52	DEOK CLINTON 1 BT	107	JC NORTH HANOVER 4 SP	162	PS DOREMUS SOLAR 1 SP	217	PS ROSELAND SOLAR 1 SP
53	DEOK WILLEY 1 BT	108	JC NORTH PARK 1 SP	163	PS E RUTHERFORD SOLAR 1 SP	218	PS SADDLE BROOK SOLAR 1 SP
54	DPL BLOOM ENERGY 1 FC	109	JC NORTH PARK 2 SP	164	PS EASTAMPTON 1 SP	219	PS SPRINGFIELD SOLAR 1 SP
55	DPL BUCKTOWN 1 SP	110	JC NORTH RUN 11 SP	165	PS EDISON 1 SP	220	PS SUNNYMEADE SOLAR 1 SP
						221	PS TAYLORS LANE 1 SP
						222	PS THOROFARE SOLAR 2 SP
						223	PS TURNPIKE 1 SP
						224	PS W CALDWELL SOLAR 1 SP
						225	PS W CALDWELL SOLAR 2 SP
						226	PS WALDWICK SOLAR 1 SP
						227	PS WEST ORANGE SOLAR 1 SP
						228	PS WEST PEMBERTON 1 SP
						229	PS WEST WINDSOR 1 CT
						230	VP BUCKINGHAM 1 SP
						231	VP GARDNER FARMS 1 SP
						232	VP GARDYS MILL ROAD 5 SP
						233	VP HOLLYFIELD 1 SP
						234	VP MURPHY 1 SP
						235	VP NORTHEAST 2 LF
						236	VP OCCOQUAN 1 LF
						237	VP OCCOQUAN 2 LF
						238	VP OCEANA 1 SP
						239	VP PULLER 1 SP
						240	VP REMINGTON 1 SP
						241	VP RICHAMBEAU 1 SP
						242	VP TWITTYS CREEK 1 SP
						243	VP VIRGINIA OFFSHORE 1 WF
						244	VP WAN - GLOUCESTER 1 SP
						245	VP WHITAKERS 1 SP
						246	VP WOODBINE ROAD 1 SP

Figure 12-3 is a map of units, 20 MW or greater in size, that came online between January 1, 2011 and June 30, 2022. A mapping to these unit names is in Table 12-5.

Figure 12-3 Map of unit additions (20 MW or greater): January 1, 2011 through June 30, 2022



**Table 12-5 Unit identification for map of unit additions (20 MW or greater): January 1, 2011 through June 30, 2022**

ID	Unit	ID	Unit	ID	Unit	ID	Unit
1	ACE CLAYVILLE 1 CT	51	BC PERRYMAN 6 CT	101	JC EDGE ROAD 5 BT	151	VP AULANDER HOLLOMAN 1 SP
2	ACE VINELAND 11 CT	52	COM 929 JACKSON 1 CC	102	JC HAMILTON ROAD 5 SP	152	VP BEAR GARDEN
3	ACE WEST DEPTFORD CROWN POINT 1 CC	53	COM 929 JACKSON 2 CC	103	JC OAK RIDGE 3 SP	153	VP BLUESTONE FARM 1 SP
4	AEP ALTAVISTA 1 SP	54	COM 942 NELSON 1 CC	104	JC PLUMSTED ENERGY 6 BT	154	VP BRIEL FARM 1 SP
5	AEP BITTER RIDGE 1 WF	55	COM 942 NELSON 2 CC	105	JC WOODBRIDGE 1 CC	155	VP BRUNSWICK 1CC
6	AEP BLUE CREEK 3 WF	56	COM BISHOP HILL 1 WF	106	JC WOODBRIDGE 2 CC	156	VP BUTCHER CREEK 1 SP
7	AEP BLUFF POINT 2 WF	57	COM BISHOP HILL 2 WF	107	ME BIRDSBORO 1 CC	157	VP CHESTNUT 1 SP
8	AEP CARROLL COUNTY 1 CC	58	COM BLOOMING GROVE 1 WF1	108	PE DELTA 1-4 CC	158	VP CHICKAHOMINY 1 SP
9	AEP CARROLL COUNTY 2 CC	59	COM BRIGHT STALK 1 WF	109	PE DELTA 5-7 CC	159	VP COLONIAL TRAIL WEST 1 SP
10	AEP DRESDEN 1 CC	60	COM GRAND RIDGE 7 BT	110	PEP KEYS ENERGY CENTER 1 CC	160	VP CONETOE 2 SP
11	AEP FOWLER RIDGE 4 WF	61	COM GREEN RIVER 1 WF	111	PEP ST CHARLES - KELSON RIDGE 1 CC	161	VP CORRECTIONAL 1 SP
12	AEP HARDIN 2 SP	62	COM GREEN RIVER 2 WF	112	PEP ST CHARLES-KELSON RIDGE 1 CC	162	VP DESERT 1 WF
13	AEP HEADWATERS 1 WF	63	COM HILLTOPPER 1 WF	113	PEP ST CHARLES-KELSON RIDGE 2 CC	163	VP DESPER 1 SP
14	AEP HEADWATERS 2 WF	64	COM JOLIET 1 BT	114	PL HAZEL 1 FW	164	VP DOSWELL 2 CT
15	AEP HOG CREEK 1 WF	65	COM KELLY CREEK 1 WF	115	PL HOLTWOOD 18	165	VP DOSWELL 3 CT
16	AEP INDECK NILES ENERGY CENTER 1 CC	66	COM LEE DEKALB 3 BT	116	PL HOLTWOOD 19	166	VP DRY BREAD 1 SP
17	AEP LONG RIDGE ENERGY 1 CC	67	COM LONE TREE 3 WF	117	PL HUMMEL STATION 1 CC	167	VP ELIZABETH CITY 1 SP
18	AEP MEADOW LAKE 5 WF	68	COM MARENGO 1 BT	118	PL HUNLOCK CC	168	VP GRASSFIELD 1 SP
19	AEP MEADOW LAKE 6 WF	69	COM MCHENRY 1 BT	119	PL LACKAWANNA COUNTY 1 CC	169	VP GREENSVILLE 1 CC
20	AEP PAULDING 3 WF	70	COM MINONK 1 WF	120	PL LACKAWANNA COUNTY 2 CC	170	VP GUTENBERG - OCONECHE 1 SP
21	AEP PAULDING 41 WF	71	COM OTTER CREEK 1 WF	121	PL LACKAWANNA COUNTY 3 CC	171	VP HARTS MILL 1 SP
22	AEP PAULDING 42 WF	72	COM PILOT HILL 1 WF	122	PL MOXIE FREEDOM 11 CC	172	VP HAWTREE CREEK 1 SP
23	AEP RIVERSTART 1 SP	73	COM RADFORDS RUN 1 WF	123	PL MOXIE FREEDOM 21 CC	173	VP IVORY LANE 1 SP
24	AEP SCIOTO RIDGE 1 WF	74	COM SHADY OAKS 1 WF	124	PL PA SOLAR 2 SP	174	VP IVY NECK 2 SP
25	AEP ST JOSEPH ENERGY CENTER 1 CC	75	COM WALNUT RIDGE 1 WF	125	PL PATRIOT 1 F	175	VP KELFORD 1 SP
26	AEP ST JOSEPH SOLAR PARK 1 SP	76	COM WEST CHICAGO 3 BT	126	PL PATRIOT 2 F	176	VP MACKEYS 1 SP
27	AEP TIMBER2 1 WF	77	COM WHITNEY HILL 2 WF	127	PN BEAVER DAM 1 D	177	VP MECHANICSVILLE 2 SP
28	AEP TRISHE 1 WF	78	DAY TAIT 8 BT	128	PN BIG LEVEL 1 WF	178	VP MOCCASIN CREEK - FERN 1 SP
29	AEP VIRGINIA CITY 1 F	79	DEOK HILLCREST 1 SP	129	PN CHESTNUT FLATS 1 WF	179	VP MONTROSS 1 SP
30	AEP WILDCAT 1A WF	80	DEOK MELDAHL DAM 1 H	130	PN FAIRVIEW 1 CC	180	VP MORGAN CORNER 1 SP
31	AEP WILDCAT 1B WF	81	DEOK MIDDLETOWN ENERGY 1 CC	131	PN FAIRVIEW 2 CC	181	VP NEW CREEK 1 WF
32	AP BEECH RIDGE 2 WF	82	DEOK YANKEE 1 F	132	PN HIGHLAND NORTH 2 WF	182	VP NEWSOMS 1 SP
33	AP BEECH RIDGE 3 BT	83	DPL CHERRYDALE 1 SP	133	PN LAUREL HILLS 1 WF	183	VP PANDA STONEWALL 1 CC
34	AP BLACK ROCK 1 WF	84	DPL DEMEC - CLAYTON 2 CT	134	PN LIBERTY ASYLUM 10 F	184	VP PECAN 1 SP
35	AP FAIR WIND 2 WF	85	DPL DORCHESTER COUNTY 1 SP	135	PN LIBERTY ASYLUM 20 F	185	VP POCATY 1 SP
36	AP FOURMILE RIDGE 1 WF	86	DPL GARRISON EC 1 CC	136	PN MEHOOPANY 1 WF	186	VP POWHATAN 2 SP
37	AP GREENE COUNTY 1 CC	87	DPL GREAT BAY KINGS CREEK 1 SP	137	PN MEHOOPANY 2 WF	187	VP RANCLAND 2 SP
38	AP LAUREL MOUNTAIN 1 BT	88	DPL GREAT BAY KINGS CREEK 2 SP	138	PN PATTON 1 WF	188	VP SAPONY 1 SP
39	AP LAUREL MOUNTAIN 1 WF	89	DPL OAK HALL 1 SP	139	PN PGCODEN 2 CT	189	VP SOUTH BOSTON 1 F
40	AP MARLOWE 1 SP	90	DPL RED LION 1 FC	140	PN RINGER HILL 1 WF	190	VP SPOTSYLVANIA 1 SP
41	AP NORTH LONGVIEW 1 F	91	DPL WILDCAT POINT 1 CC	141	PN SANDY RIDGE 1 WF	191	VP SPRING GROVE 1 SP
42	AP PINNACLE 1 WF	92	FE FREMONT 1 SCCT	142	PN SUGAR RUN 2 CT	192	VP SUMMIT FARMS 1 SP
43	AP ROTH ROCK 1 WF	93	FE FREMONT 2 SCCT	143	PS KEARNY 131 CT	193	VP UNION CAMP 9-10 F
44	AP SOUTH CHESTNUT 1 WF	94	FE FREMONT ENERGY CENTER 3 CC	144	PS KEARNY 132 CT	194	VP WARDS CREEK 1 SP
45	AP ST THOMAS 1 SP	95	FE HIBBETS MILLS ROAD 1 CC	145	PS KEARNY 133 CT	195	VP WARREN COUNTY FRONT ROYAL CC
46	AP ST THOMAS 2 SP	96	FE HIBBETS MILLS ROAD 2 CC	146	PS KEARNY 134 CT	196	VP WATER STRIDER 1 SP
47	AP TWIN RIDGES 1 WF	97	FE HICKORY RUN 1 CC	147	PS KEARNY 141 CT	197	VP WHITEHORN 1 SP
48	AP WARRIOR RUN 2 BT	98	FE LORDSTOWN ENERGY CENTER 1 CC	148	PS KEARNY 142 CT	198	VP WILKINSON ENERGY CENTER 1 SP
49	AP WESTMORELAND 1 CC	99	FE LORDSTOWN ENERGY CENTER 2 CC	149	PS NEWARK ENERGY CENTER 10 CC		
50	AP WILLOW ISLAND 1 H	100	FE OREGON ENERGY CENTER 1 CC	150	PS SEWAREN 7 CC		

## Generation Retirements<sup>19 20</sup>

Generating units generally plan to retire when they are not economic and do not expect to be economic. The MMU performs an analysis of the economics of all units that plan to retire in order to verify that the units are not economic and there is no potential exercise of market power through physical withholding that could advantage the owner's portfolio.<sup>21</sup> The definition of economic is that unit net revenues are greater than or equal to the unit's avoidable or going forward costs.

PJM does not have the authority to order generating plants to continue operating. PJM's responsibility is to ensure system reliability. When a unit retirement creates reliability issues based on existing and planned generation facilities and on existing and planned transmission facilities, PJM identifies transmission solutions.<sup>22</sup>

Rules that preserve the Capacity Interconnection Rights (CIRs) associated with retired units, and with the conversion from Capacity Performance (CP) to energy only status, impose significant costs on new entrants. Currently, CIRs persist for one year if unused, and they can be further extended, at no cost, if assigned to a new project in the interconnection queue at the same point of interconnection.<sup>23</sup> There are currently no rules governing the retention of CIRs when units want to convert to energy only status or require time to upgrade to retain CP status. The rules governing conversion or upgrades should be the same as the rules governing retired units. Reforms that require the holders of CIRs to use or lose them, and/or impose costs to holding or transferring them, could make new entry appropriately more attractive. The economic and policy rationale for extending CIRs for inactive units is not clear. Incumbent providers receive a significant advantage simply by imposing on new entrants the entire cost of system upgrades needed to accommodate new entrants. The policy question of whether CIRs should persist after the retirement of a

unit should be addressed. Even if the policy treatment of such CIRs remains unchanged, the rules need to ensure that incumbents cannot exploit control of CIRs to block or postpone entry of competitors.

In May 2012, PJM stakeholders (through the Interconnection Process Senior Task Force (IPSTF)) modified the rules to reduce the length of time for which CIRs are retained by the current owner after unit retirements from three years to one.<sup>24</sup> The MMU recognized the progress made in this rule change, but it did not fully address the issues. The MMU recommends that the question of whether CIRs should persist after the retirement of a unit, or conversion from CP to energy only status, be addressed. The rules need to ensure that incumbents cannot exploit control of CIRs to block or postpone entry of competitors.<sup>25</sup>

## Generation Retirements 2011 through 2024

Table 12-6 shows that as of June 30, 2022, there are 51,797.6 MW of generation that have been, or are planned to be, retired between 2011 and 2024, of which 40,647.1 MW (78.5 percent) are coal fired steam units. Retirements are primarily a result of the inability of coal and other units to compete with efficient combined cycle units burning low cost gas.

<sup>19</sup> See PJM. Planning. "Generator Deactivations," (Accessed on June 30, 2022) <<http://www.pjm.com/planning/services-requests/gen-deactivations.aspx>>.

<sup>20</sup> Generation retirements reported in this section do not include external units. Therefore, retirement totals reported in this section may not match totals reported elsewhere in this report where external units are included.

<sup>21</sup> See OATT Part V and Attachment M-Appendix § IV.

<sup>22</sup> See PJM. "Explaining Power Plant Retirements in PJM," at <<http://learn.pjm.com/three-priorities/planning-for-the-future/explaining-power-plant-retirements.aspx>>.

<sup>23</sup> See OATT § 230.3.3.

<sup>24</sup> See PJM Interconnection, LLC, Docket No. ER12-1177 (Feb. 29, 2012).

<sup>25</sup> See Comments of the Independent Market Monitor for PJM, Docket No. ER12-1177-000 (March 12, 2012) <[http://www.monitoringanalytics.com/Filings/2012/IMM\\_Comments\\_ER12-1177-000\\_20120312.PDF](http://www.monitoringanalytics.com/Filings/2012/IMM_Comments_ER12-1177-000_20120312.PDF)>.

**Table 12-6 Summary of unit retirements by unit type (MW): 2011 through 2024**

	CT -					Hydro -		Hydro -		RICE -			Steam -							Wind +		Total
	Battery	Combined Cycle	Natural Gas	CT - Oil	CT - Other	Fuel Cell	Pumped Storage	Run of River	Nuclear	Natural Gas	RICE - Oil	RICE - Other	Solar	Solar + Storage	Solar + Wind	Steam - Coal	Natural Gas	Steam - Oil	Steam - Other	Wind	Storage	
Retirements 2011	0.0	0.0	0.0	128.3	0.0	0.0	0.0	0.0	0.0	0.0	2.7	0.0	0.0	0.0	0.0	543.0	522.5	0.0	0.0	0.0	0.0	1,196.5
Retirements 2012	0.0	0.0	250.0	240.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	5,907.9	0.0	548.0	16.0	0.0	0.0	6,961.9
Retirements 2013	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	5.9	7.0	0.0	0.0	0.0	2,589.9	82.0	166.0	8.0	0.0	0.0	2,858.8
Retirements 2014	0.0	0.0	136.0	422.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	15.3	0.0	0.0	0.0	2,239.0	158.0	0.0	0.0	0.0	0.0	2,970.3
Retirements 2015	0.0	0.0	1,319.0	856.2	2.0	0.0	0.0	0.0	0.0	0.0	10.3	0.0	0.0	0.0	0.0	7,064.8	0.0	0.0	0.0	10.4	0.0	9,262.7
Retirements 2016	0.0	0.0	0.0	65.0	6.0	0.0	0.5	0.0	0.0	0.0	8.0	3.9	0.0	0.0	0.0	243.0	74.0	0.0	0.0	0.0	0.0	400.4
Retirements 2017	40.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.8	0.0	0.0	0.0	2,038.0	34.0	0.0	0.0	0.0	0.0	2,112.8
Retirements 2018	1.0	425.0	0.0	38.0	1.6	0.0	0.0	0.0	614.5	0.0	17.2	6.9	0.0	0.0	0.0	3,186.5	996.0	148.0	108.0	0.0	0.0	5,542.7
Retirements 2019	0.0	0.0	346.8	51.4	6.4	0.0	0.0	0.0	805.0	0.0	0.0	15.9	0.0	0.0	0.0	4,113.8	97.0	10.0	10.0	0.0	0.0	5,456.3
Retirements 2020	0.0	0.0	232.5	24.0	6.0	0.0	0.0	0.0	0.0	0.0	0.0	14.7	0.0	0.0	0.0	2,131.8	0.0	786.0	60.0	0.0	0.0	3,255.0
Retirements 2021	4.0	118.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	15.9	0.0	0.0	0.0	1,020.4	102.0	0.0	50.0	0.0	0.0	1,310.3
Retirements 2022	40.0	240.5	99.0	284.3	0.0	0.0	0.0	0.0	0.0	0.0	0.0	18.9	0.0	0.0	0.0	4,875.0	0.0	0.0	0.0	0.0	0.0	5,557.7
Planned Retirements (July 1, 2022 and later)	0.0	0.0	132.6	32.0	0.0	0.0	0.0	0.0	0.0	0.0	34.0	19.6	0.0	0.0	0.0	4,694.0	0.0	0.0	0.0	0.0	0.0	4,912.2
Total	85.0	783.5	2,515.9	2,141.2	22.0	0.0	0.5	0.0	1,419.5	0.0	78.1	118.9	0.0	0.0	0.0	40,647.1	2,065.5	1,658.0	252.0	10.4	0.0	51,797.6

Table 12-7 shows the capacity, average size, and average age of units retiring in PJM, from 2011 through 2024, while Table 12-8 shows these retirements by state. Of the 51,797.6 MW of units that has been, or are planned to be, retired between 2011 and 2024, 40,647.1 MW (78.5 percent) are coal fired steam units. These coal fired steam units have an average age of 52.1 years and an average size of 216.2 MW. Over half of the retiring coal fired steam units, 53.9 percent, are located in Ohio or Pennsylvania.

**Table 12-7 Retirements by unit type: 2011 through 2024**

Unit Type	Number of Units	Avg. Size (MW)	Avg. Age at Retirement (Years)	Total MW	Percent
Battery	6	14.2	6.2	85.0	0.2%
Combined Cycle	6	130.6	29.1	783.5	1.5%
Combustion Turbine	134	25.5	35.6	4,679.1	9.0%
Natural Gas	65	38.7	41.4	2,515.9	4.9%
Oil	63	34.0	46.2	2,141.2	4.1%
Other	6	3.7	19.2	22.0	0.0%
Fuel Cell	0	0.0	0.0	0.0	0.0%
Hydro	1	0.5	113.8	0.5	0.0%
Pumped Storage	1	0.5	113.8	0.5	0.0%
Run of River	0	0.0	0.0	0.0	0.0%
Nuclear	2	709.8	47.2	1,419.5	2.7%
RICE	40	5.0	26.1	197.0	0.4%
Natural Gas	0	0.0	0.0	0.0	0.0%
Oil	15	5.2	40.4	78.1	0.2%
Other	25	4.8	11.8	118.9	0.2%
Solar	0	0	0	0	0.0%
Solar + Storage	0	0	0	0	0.0%
Solar + Wind	0	0	0	0	0.0%
Steam	220	159.7	45.6	44,622.6	86.1%
Coal	188	216.2	52.1	40,647.1	78.5%
Natural Gas	18	114.8	60.8	2,065.5	4.0%
Oil	6	276.3	45.6	1,658.0	3.2%
Other	8	31.5	23.8	252.0	0.5%
Wind	1	10.4	15.6	10.4	0.0%
Wind + Storage	0	0	0	0	0.0%
Total	410	126.3	44.9	51,797.6	100.0%



Table 12-8 Retirements (MW) by unit type and state: 2011 through 2024

State	CT -					Hydro -			RICE -			Steam -					Wind +		Total			
	Battery	Combined Cycle	Natural Gas	CT - Oil	CT - Other	Fuel Cell	Pumped Storage	Hydro - Run of River	Nuclear	RICE - Natural Gas	RICE - Oil	RICE - Other	Solar + Storage	Solar + Wind	Steam - Coal	Steam - Natural Gas	Steam - Oil	Steam - Other		Wind Storage		
DC	0.0	0.0	0.0	240.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	548.0	0.0	0.0	0.0	0.0	788.0
DE	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	664.0	136.0	0.0	0.0	0.0	0.0	0.0	800.0
IL	40.0	0.0	296.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	35.7	0.0	0.0	0.0	2,818.1	0.0	0.0	0.0	0.0	0.0	0.0	3,189.8
IN	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	982.0	0.0	0.0	0.0	0.0	0.0	0.0	982.0
KY	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	995.0	0.0	0.0	0.0	0.0	0.0	0.0	995.0
MD	0.0	0.0	347.5	136.0	1.6	0.0	0.0	0.0	0.0	0.0	3.2	0.0	0.0	0.0	3,068.0	171.0	0.0	0.0	0.0	0.0	0.0	3,727.3
NC	0.0	0.0	0.0	31.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	324.5	0.0	0.0	0.0	0.0	0.0	0.0	355.5
NJ	0.0	465.5	1,671.0	1,040.2	6.4	0.0	0.5	0.0	614.5	0.0	8.0	24.4	0.0	0.0	2,001.9	932.5	148.0	10.0	0.0	0.0	0.0	6,922.9
OH	42.0	0.0	0.0	307.0	0.0	0.0	0.0	0.0	0.0	32.3	26.7	0.0	0.0	0.0	16,607.4	0.0	0.0	0.0	0.0	0.0	0.0	17,015.4
PA	1.0	51.0	121.4	307.3	14.0	0.0	0.0	0.0	805.0	0.0	13.9	20.5	0.0	0.0	5,299.3	283.0	176.0	109.0	10.4	0.0	0.0	7,211.8
TN	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	50.0	0.0	0.0	0.0	50.0
VA	0.0	267.0	80.0	79.7	0.0	0.0	0.0	0.0	0.0	23.9	8.4	0.0	0.0	0.0	3,917.9	543.0	786.0	83.0	0.0	0.0	0.0	5,788.9
WV	2.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	3,969.0	0.0	0.0	0.0	0.0	0.0	0.0	3,971.0
Total	85.0	783.5	2,515.9	2,141.2	22.0	0.0	0.5	0.0	1,419.5	0.0	78.1	118.9	0.0	0.0	40,647.1	2,065.5	1,658.0	252.0	10.4	0.0	0.0	51,797.6

Figure 12-4 is a map of unit retirements between 2011 and 2024, with a mapping to unit names in Table 12-9.

Figure 12-4 Map of unit retirements: 2011 through 2024

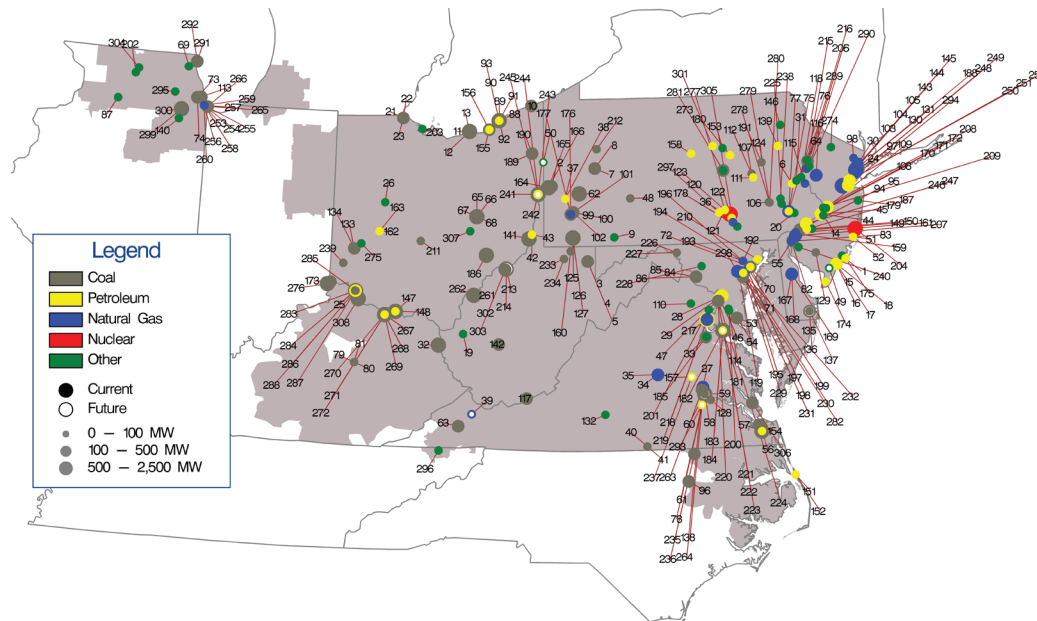


Table 12-9 Unit identification for map of unit retirements: 2011 through 2024

ID	Unit	ID	Unit	ID	Unit	ID	Unit	ID	Unit
1	AC Landfill Units 1 and 2	61	Chesterfield 6	121	Harrisburg CT 1	181	Morgantown CT1	241	Sammis 1-4
2	AES Beaver Valley	62	Cheswick 1	122	Harrisburg CT 2	182	Morgantown CT2	242	Sammis Diesel Units
3	Albright 1	63	Clinch River 3	123	Harrisburg CT 3	183	Morgantown Unit 1	243	Sammis Unit 5
4	Albright 2	64	Columbia Dam Hydro	124	Harwood 1-2	184	Morgantown Unit 2	244	Sammis Unit 6
5	Albright 3	65	Conesville 3	125	Hatfield's Ferry 1	185	Morris Landfill Generator	245	Sammis Unit 7
6	Allentown CT 1-4	66	Conesville 4	126	Hatfield's Ferry 2	186	Muskingum River 1-5	246	Schuylkill 1
7	Armstrong 1	67	Conesville 5	127	Hatfield's Ferry 3	187	National Park 1	247	Schuylkill Diesel
8	Armstrong 2	68	Conesville 6	128	Hopewell James River Cogeneration	188	New Bay Cogen CC	248	Sewaren 1
9	Arnold (Green Mtn. Wind Farm)	69	Countryside Landfill	129	Howard Down 10	189	Niles 1	249	Sewaren 2
10	Ashtabula 5	70	Crane 1	130	Hudson 1	190	Niles 2	250	Sewaren 3
11	Avon Lake 10	71	Crane 2	131	Hudson 2	191	Northeastern Power NEPCO	251	Sewaren 4
12	Avon Lake 7	72	Crane GT1	132	Hurt NUG	192	Notch Cliff GT1	252	Sewaren 6
13	Avon Lake 9	73	Crawford 7	133	Hutchings 1-3, 5-6	193	Notch Cliff GT2	253	Southeast Chicago CT11
14	BC Landfill	74	Crawford 8	134	Hutchings 4	194	Notch Cliff GT3	254	Southeast Chicago CT12
15	BL England 1	75	Cromby 1	135	Indian River 1	195	Notch Cliff GT4	255	Southeast Chicago CT5
16	BL England 2	76	Cromby 2	136	Indian River 3	196	Notch Cliff GT5	256	Southeast Chicago CT6
17	BL England 3	77	Cromby D	137	Indian River 4	197	Notch Cliff GT6	257	Southeast Chicago CT7
18	BL England Diesel Units 1-4	78	DINWIDDIE 1 CT	138	Ingenco Petersburg	198	Notch Cliff GT7	258	Southeast Chicago CT8
19	Balls Gap Battery Facility	79	Dale 1-2	139	Jenkins CT 1-2	199	Notch Cliff GT8	259	Southeast Chicago GT10
20	Barbados AES Battery	80	Dale 3	140	Joliet Energy Storage	200	Oaks Landfill	260	Southeast Chicago GT9
21	Bay Shore 2	81	Dale 4	141	Kammer 1-3	201	Occoquan 1 LF	261	Sporn 1-4
22	Bay Shore 3	82	Deepwater 1	142	Kanawha River 1-2	202	Orchard Hills LF	262	Sporn 5
23	Bay Shore 4	83	Deepwater 6	143	Kearny 10	203	Ottawa County Project	263	Spruance NUG1 (Rich 1-2)
24	Bayonne Cogen Plant (CC)	84	Dickerson Unit 1	144	Kearny 11	204	Oyster Creek	264	Spruance NUG2 (Rich 3-4)
25	Beckjord Battery Unit 2	85	Dickerson Unit 2	145	Kearny 9	205	PL MARTINS CREEK 1-4 CT	265	State Line 3
26	Bellefontaine Landfill Generating Station	86	Dickerson Unit 3	146	Keystone Recovery (Units 1 - 7)	206	PL MARTINS CREEK 1-4 CT	266	State Line 4
27	Bellemeade	87	Dixon Lee Landfill Generator	147	Killen 2	207	Pedricktown Cogen CC	267	Stuart 1
28	Benning 15	88	Eastlake 1	148	Killen CT	208	Pennsbury Generator Landfill 1	268	Stuart 2
29	Benning 16	89	Eastlake 2	149	Kimberly Clark Generator	209	Pennsbury Generator Landfill 2	269	Stuart 3
30	Bergen 3	90	Eastlake 3	150	Kinsley Landfill	210	Perryman 2	270	Stuart 4
31	Bethlehem Renewable Energy Generator (Landfill)	91	Eastlake 4	151	Kitty Hawk GT 1	211	Picway 5	271	Stuart Diesels 1-4
32	Big Sandy 2	92	Eastlake 5	152	Kitty Hawk GT 2	212	Piney Creek NUG	272	Stuart Diesels 1-4
33	Birchwood Plant	93	Eastlake 6	153	Koppers Co. IPP	213	Pleasant Unit 1	273	Sunbury 1-4
34	Bremo 3	94	Eddystone 1	154	Lake Kingman	214	Pleasant Unit2	274	Sussex County LF
35	Bremo 4	95	Eddystone 2	155	Lake Shore 18	215	Portland 1	275	Tait Battery
36	Brunner Island Diesels	96	Edgecomb NUG (Rocky 1-2)	156	Lake Shore EMD	216	Portland 2	276	Tanners Creek 1-4
37	Brunot Island 1B	97	Edison 1-3	157	Lanier 1 CT	217	Possum Point 3	277	Three Mile Island Unit 1
38	Brunot Island 1C	98	Elmwood Park Power	158	Lock Haven CT 1	218	Possum Point 4	278	Titus 1
39	Buchanan 1-2	99	Elrama 1	159	Logan	219	Possum Point 5	279	Titus 2
40	Buggs Island 1 (Mecklenberg)	100	Elrama 2	160	MEA NUG (WVU)	220	Potomac River 1	280	Titus 3
41	Buggs Island 2 (Mecklenberg)	101	Elrama 3	161	MH50 Markus Hook Co-gen	221	Potomac River 2	281	Viking Energy NUG
42	Burger 3	102	Elrama 4	162	Mad River CTs A	222	Potomac River 3	282	Wagner 2
43	Burger EMD	103	Essex 10-11	163	Mad River CTs B	223	Potomac River 4	283	Walter C Beckjord 1
44	Burlington 8,11	104	Essex 12	164	Mansfield 1	224	Potomac River 5	284	Walter C Beckjord 2
45	Burlington 9	105	Essex 9	165	Mansfield 2	225	Pottstown LF (Moser)	285	Walter C Beckjord 3
46	Buzzard Point East Banks 1,2,4-8	106	Evergreen Power United Corstack	166	Mansfield 3	226	R Paul Smith 3	286	Walter C Beckjord 4
47	Buzzard Point West Banks 1-9	107	FRACKVILLE WHEELABRATOR 1	167	McKee 1	227	R Paul Smith 4	287	Walter C Beckjord 5-6
48	Cambria CoGen	108	Fairless Hills Landfill A	168	McKee 2	228	Reichs Ford Road Landfill Generator	288	Walter C Beckjord GT 1-4
49	Cape May County Municipal LF	109	Fairless Hills Landfill B	169	McKee 3	229	Riverside 4	289	Warren County Landfill
50	Carbon Limestone LF	110	Fauquier County Landfill	170	Mercer 1	230	Riverside 6	290	Warren County NUG
51	Cedar 1	111	Fishbach CT 1	171	Mercer 2	231	Riverside 7	291	Waukegan 7
52	Cedar 2	112	Fishbach CT 2	172	Mercer 3	232	Riverside 8	292	Waukegan 8
53	Chalk Point Unit 1	113	Fisk Street 19	173	Miami Fort 6	233	Riversville 5	293	Weakley CT
54	Chalk Point Unit 2	114	GUDE Landfill	174	Middle 1-3	234	Riversville 6	294	Werner 1-4
55	Chambers CCLP	115	Gilbert 1-4	175	Missouri Ave B,C,D	235	Roanoke Valley 1	295	West Chicago Energy Storage
56	Chesapeake 1-4	116	Glen Gardner 1-8	176	Mitchell 2	236	Roanoke Valley 2	296	West Kingsport LF
57	Chesapeake 7-10	117	Glen Lyn 5-6	177	Mitchell 3	237	Rockville CT	297	West Shore CT 1-2
58	Chesterfield 3	118	Glendon LF	178	Modern Power Landfill NUG	238	Rolling Hills Landfill Generator	298	Westport 5
59	Chesterfield 4	119	Gould Street Generation Station	179	Monmouth NUG landfill	239	SMART Paper	299	Will County 3
60	Chesterfield 5	120	Harrisburg 4 CT	180	Montour ATG	240	Salem County LF	300	Will County 4

## Current Year Generation Retirements

Table 12-10 shows that in the first six months of 2022, 5,557.7 MW of generation retired. The largest generator that retired in the first six months of 2022 was the 638.0 MW Avon Lake Unit 9 coal fired steam unit located in the ATSI Zone. Of the 5,557.7 MW of generation that retired, 1,300.0 MW (23.4 percent) were located in the DUKE Zone.

**Table 12-10 Unit deactivations: January through June, 2022**

Company	Unit Name	ICAP (MW)	Unit Type	Zone Name	Age (Years)	Retirement
						Date
GenOn Energy, Inc.	Avon Lake 10	21.0	CT-Oil	ATSI	54	3/31/2022
GenOn Energy, Inc.	Avon Lake 9	638.0	Steam-Coal	ATSI	52	3/31/2022
GenOn Energy, Inc.	Cheswick 1	565.0	Steam-Coal	DUO	52	3/31/2022
Hoosier Energy Rural Electric Cooperative Inc	Orchard Hills LF	15.3	RICE-Other	COMED	5	3/31/2022
Riverstone Holdings LLC	Fishbach CT 1	28.0	CT-Oil	PPL	53	4/1/2022
Riverstone Holdings LLC	Fishbach CT 2	14.0	CT-Oil	PPL	53	4/1/2022
Riverstone Holdings LLC	Jenkins CT 1-2	27.6	CT-Oil	PPL	53	4/1/2022
Riverstone Holdings LLC	Lock Haven CT 1	14.0	CT-Oil	PPL	52	4/1/2022
Riverstone Holdings LLC	West Shore CT 1	28.0	CT-Oil	PPL	53	4/1/2022
Riverstone Holdings LLC	Williamsport-Lycoming CT 1-2	26.6	CT-Oil	PPL	55	4/1/2022
Renewable Energy Systems Holdings LTD	Joliet Energy Storage	20.0	Battery	COMED	7	4/29/2022
Renewable Energy Systems Holdings LTD	West Chicago Energy Storage	20.0	Battery	COMED	7	4/29/2022
American Electric Power Company, Inc.	Zimmer 1	330.0	Steam-Coal	DUKE	31	5/31/2022
American Municipal Power, Inc.	Ottawa County Project	3.6	RICE-Other	ATSI	21	5/31/2022
GenOn Energy, Inc.	Morgantown Unit 1	610.0	Steam-Coal	PEPCO	52	5/31/2022
GenOn Energy, Inc.	Morgantown Unit 2	619.0	Steam-Coal	PEPCO	51	5/31/2022
NRG Energy Inc	Waukegan 7	328.0	Steam-Coal	COMED	64	5/31/2022
NRG Energy Inc	Waukegan 8	356.1	Steam-Coal	COMED	60	5/31/2022
Riverstone Holdings LLC	Harwood 1-2	28.0	CT-Oil	PPL	55	5/31/2022
Starwood Capital Group LLC	Logan	219.0	Steam-Coal	ACEC	28	5/31/2022
The AES Corporation	Zimmer 1	365.0	Steam-Coal	DUKE	31	5/31/2022
Vistra Energy Corp	Zimmer 1	605.0	Steam-Coal	DUKE	31	5/31/2022
Arclight Capital Holdings LLC	Essex 9	81.0	CT-Natural_Gas	PSEG	32	6/1/2022
Riverstone Holdings LLC	Allentown CT 1-4	56.0	CT-Oil	PPL	55	6/1/2022
Riverstone Holdings LLC	Harrisburg CT 1	13.4	CT-Oil	PPL	55	6/1/2022
Riverstone Holdings LLC	Harrisburg CT 2	13.9	CT-Oil	PPL	55	6/1/2022
Riverstone Holdings LLC	Harrisburg CT 3	13.8	CT-Oil	PPL	55	6/1/2022
Riverstone Holdings LLC	Martins Creek CT 3	18.0	CT-Natural Gas	PPL	51	6/1/2022
Riverstone Holdings LLC	New Bay Cogen CC	120.2	Combined Cycle	PSEG	29	6/1/2022
Riverstone Holdings LLC	Pedricktown Cogen CC	120.3	Combined Cycle	ACEC	30	6/1/2022
Starwood Capital Group LLC	Chambers CCLP	239.9	Steam-Coal	ACEC	28	6/7/2022
<b>Total</b>		<b>5,557.7</b>				

## Planned Generation Retirements

Table 12-11 shows that, as of June 30, 2022, there are 4,912.2 MW of generation that have requested retirement after June 30, 2022. Of the 4,912.2 MW requesting retirement, 4,694.0 MW (95.6 percent) are coal fired steam units. As of June 30, 2022, there are planned coal fired unit retirements in five different PJM zones. Of the 4,912.2 MW of planned retirements, 1,520.7 MW (31.0 percent) are located in the ATSI Zone. Of the generation requesting retirement in the ATSI Zone, 1,490.0 MW (98.0 percent) are coal fired steam units.

**Table 12-11 Planned retirement of units: June 30, 2022**

Company	Unit Name	ICAP (MW)	Unit Type	Zone Name	Projected Deactivation Date
Cape May County Municipal Utilities Authority	Cape May County Municipal LF	1.9	RICE-Other	ACEC	01-Mar-22
NRG Energy Inc	Will County 4	510.0	Steam-Coal	COMED	30-Jun-22
American Municipal Power, Inc.	Carbon Limestone LF	17.7	RICE-Other	ATSI	31-Jul-22
GenOn Energy, Inc.	Morgantown CT1	16.0	CT-Oil	PEPCO	01-Oct-22
GenOn Energy, Inc.	Morgantown CT2	16.0	CT-Oil	PEPCO	01-Oct-22
Dominion Energy, Inc.	Chesterfield 5	336.0	Steam-Coal	DOM	31-May-23
Dominion Energy, Inc.	Chesterfield 6	670.0	Steam-Coal	DOM	31-May-23
LS Power Equity Partners, LP.	Buchanan 1-2	80.0	CT-Natural_Gas	AEP	01-Jun-23
Castleton Commodities International LLC	DINWIDDIE 1 CT	3.0	RICE-Oil	DOM	01-Jun-23
Castleton Commodities International LLC	Lanier 1 CT	7.0	RICE-Oil	DOM	01-Jun-23
Riverstone Holdings LLC	Martins Creek CT 1	18.0	CT-Natural_Gas	PPL	01-Jun-23
Riverstone Holdings LLC	Martins Creek CT 2	17.3	CT-Natural_Gas	PPL	01-Jun-23
Riverstone Holdings LLC	Martins Creek CT 4	17.3	CT-Natural_Gas	PPL	01-Jun-23
Avenue Capital Group LLC	Pleasant Unit 1	639.0	Steam-Coal	APS	01-Jun-23
Avenue Capital Group LLC	Pleasant Unit2	639.0	Steam-Coal	APS	01-Jun-23
Castleton Commodities International LLC	Rockville CT	4.0	RICE-Oil	DOM	01-Jun-23
Avenue Capital Group LLC	Sammis Diesel Units	13.0	RICE-Oil	ATSI	01-Jun-23
Avenue Capital Group LLC	Sammis Unit 5	290.0	Steam-Coal	ATSI	01-Jun-23
Avenue Capital Group LLC	Sammis Unit 6	600.0	Steam-Coal	ATSI	01-Jun-23
Avenue Capital Group LLC	Sammis Unit 7	600.0	Steam-Coal	ATSI	01-Jun-23
Castleton Commodities International LLC	Weakley CT	7.0	RICE-Oil	DOM	01-Jun-23
NRG Energy Inc	Indian River 4	410.0	Steam-Coal	DPL	31-Dec-26
<b>Total</b>		<b>4,912.2</b>			

In addition to the 4,912.2 MW of announced unit retirements as of June 30, 2022, there are significantly more unit retirements expected as a result of state environmental actions. PJM anticipates an additional 20,000 MW of unit retirements between 2024 and 2030, and an additional 10,000 MW of unit retirements between 2031 and 2045.<sup>26</sup>

<sup>26</sup> See "Generation Deliverability Test Modifications: Light Load, Summer & Winter," presented at February 23, 2022 meeting of the Planning Committee Special Session on CIR's for ELCC Resources at p8. <<https://www.pjm.com/-/media/committees-groups/committees/pc/2022/20220223-special/20220223-item-04-generator-deliverability-proposal-analytical-results.ashx>>.

## Generation Queue<sup>27</sup>

Any entity that requests interconnection of a new generating facility, including increases to the capacity of an existing generating unit, or that requests interconnection of a merchant transmission facility, must follow the process defined in the PJM tariff to obtain interconnection service.<sup>28</sup> PJM's process is designed to ensure that new generation is added in a reliable and systematic manner. The process is complex and time consuming at least in part as a result of the required analyses. The cost, time and uncertainty associated with interconnecting to the grid may create barriers to entry for potential entrants. But the behavior of project developers also creates issues with queue management and exacerbates the barriers.

Generation request queues are groups of proposed projects, including new units, reratings of existing units, capacity resources and energy only resources. Each queue is open for a fixed amount of time. Studies commence on all projects in a given queue when that queue closes. Queues A and B were open for one year. Queues C through T were open for six months. Starting in February 2008, Queues U through Y1 were open for three months. In May 2012, the duration of the queue period was reset to six months, starting with Queue Y2. Queue AH2 opened on October 1, 2021 and closed on March 10, 2022 and Queue AI1 opened on April 1, 2022. On June 24, 2021, PJM requested tariff modifications to close queue windows on September 10 and March 10, rather than September 30 and March 31.<sup>29</sup> This change allows more time to review the new requests to the queue without shortening the amount of time available for the resulting model builds and analyses. On August 23, 2021, the Commission approved the tariff modifications.<sup>30</sup>

Projects submitted to the queue undergo a deficiency review to ensure that all required information is provided. If a project is missing information, or if the submitting developer owes money from a prior queue request, the submission is defined to be deficient. PJM was required to perform the review and provide notification within five business days of receipt of the request. The developer

had ten business days to respond. PJM had five business days to review the response. As a result of the large number of project submissions submitted close to the end of each queue window, PJM could not meet the required timeline. On June 24, 2021, PJM filed tariff changes to modify the deficiency review timeline.<sup>31</sup> PJM requested an increase in the initial notification to the interconnection customer from five to 15 business days, or as soon thereafter as practicable, making the deadline flexible. The developer has ten business days to respond. PJM requested an increase in PJM's time to respond from five to 15 business days, or as soon thereafter as practicable, making the deadline flexible. On August 23, 2021, the Commission approved the tariff modifications.<sup>32</sup> A queue position is assigned once the project has met the submission requirements. Projects that do not meet submission requirements are removed from the queue.

All projects that have entered a queue and have met the submission requirements have a status assigned. Projects listed as active are undergoing one of the studies (feasibility, system impact, facility) required to proceed. Other status options are under construction, suspended, and in service. A project cannot be suspended until it has reached the status of under construction. Any project that entered the queue before February 1, 2011, can be suspended for up to three years. Projects that entered the queue after February 1, 2011, face an additional restriction in that the suspension period is reduced to one year if they affect any project later in the queue.<sup>33</sup> When a project is suspended, PJM extends the scheduled milestones by the duration of the suspension. If, at any time, a milestone is not met, PJM will initiate the termination of the Interconnection Service Agreement (ISA) and the corresponding cancellation costs must be paid by the customer.<sup>34</sup>

PJM has generally met the deadlines for feasibility and system impact studies. The increase in the number of projects submitted have contributed to a significant backlog in performing timely facility studies. The facility study includes the conceptual design, stability analyses and determines the network upgrades, and the costs associated with those upgrades. Modifications to

<sup>27</sup> The queue totals in this report are the winter net MW energy for the interconnection requests ("MW Energy") as shown in the queue.

<sup>28</sup> See OATT Parts IV & VI.

<sup>29</sup> See PJM Filing, Docket ER21-2203 (June 24, 2021).

<sup>30</sup> 176 FERC ¶ 61,117 (2021).

<sup>31</sup> See PJM Filing, Docket ER21-2203 (June 24, 2021).

<sup>32</sup> 176 FERC ¶ 61,117 (2021).

<sup>33</sup> See "PJM Manual 14C: Generation and Transmission Interconnection Process," Rev. 14 (January 27, 2021).

<sup>34</sup> PJM does not track the duration of suspensions or PJM termination of projects.

proposed facilities and restudies resulting from the withdrawal of projects from the queue also affect the time to complete a facility study. The PJM queue evaluation process should continue to be improved to help ensure that barriers to competition from new generation investments are not created. The PJM queue evaluation process should also evaluate and address the incentives to project developers to act in ways that are not consistent with an effective and efficient queue process for the system. For example, when developers put multiple projects in the queue to maintain their own optionality while planning to build only one they also affect all the projects that follow them in the queue by requiring multiple restudies.

Starting in 2020, PJM has made significant progress in addressing many of the underlying issues. In 2020, PJM conducted interconnection process workshops designed to review current processes, receive input and recommendations from stakeholders and to develop improvements to the process, resulting in the creation of the Interconnection Process Reform Task Force (IPRTF) to improve overall queue management.

The proposal endorsed by the IPRTF includes modifications to implement a cluster/cycle based processing method to replace the first in/first out processing method.<sup>35</sup> This change will allow projects to move forward based on a first ready/first out analysis, where readiness is demonstrated through site control and financial milestones and there is an option to exit the study process early based on system impacts. The proposal also includes defining progress to completion through three phases, with a customer decision at the end of each. The proposed solution requires a stronger definition of site control, and includes readiness deposits (some of which are nonrefundable) based on the phase of development. Additional process modifications include limits to technology changes, improvements to the application review phase, removal of optional interconnection study processes, modifications to the study schedules to reduce the number of restudies required in the event of project modifications, adjusting the queue window schedule to coincide with the previous clusters' milestones, and modifications to cost responsibility by assigning responsibility to all projects within a queue cycle. The proposed

<sup>35</sup> See "Interconnection Process Reform," presented at April 27, 2022 meeting of the Members Committee. <<https://www.pjm.com/-/media/committees-groups/committees/mc/2022/20220427/20220427-item-01a-1-interconnection-process-reform-presentation.ashx>>.

solution should help to reduce backlog and to remove projects that are not viable earlier to help improve the overall efficiency of the queue process. On June 14, 2022, PJM filed tariff changes to incorporate the endorsed modifications to the interconnection queue process.<sup>36</sup>

The proposal creates a transition process which treats projects based on their current queue status. All projects through queue window AD2 will continue as part of the existing queue process. The transition process assigns existing queue projects in queue windows AE1 through AH1 to transition cycle 1 and transition cycle 2 and also provides for the expedited treatment (fast track) of projects submitted in the AE1 through AG1 queue windows with upgrade costs less than \$5 million. Transition cycle 1 is expected to begin in late 2023. Transition cycle 2 is expected to begin in late 2024. Projects submitted in queue window AH2 and beyond will be evaluated starting in early 2026. While new applications will continue to be accepted, the transition process will delay their consideration for an unknown period. The transition process itself will not begin until projects eligible for the existing queue process have an executed ISA or the equivalent. After the process for projects in transition cycles 1 and 2 has been completed, projects in queue AH2 and possible subsequent queues will be studied. The new process will not be fully implemented until PJM provides notice that it is accepting applications for the first cycle entirely under the new process. That notice will be provided only after PJM has complete all the prior required transition steps.

On July 15, 2021, the Commission issued an Advance Notice of Proposed Rulemaking (ANOPR).<sup>37</sup> The purpose of the ANOPR is to review transmission related regulations and determine whether additional reforms to the regional transmission planning, cost allocation and generator interconnection processes are needed. The ANOPR discusses the impacts of transmission rules on the competitiveness of the energy markets but does not focus on the competitiveness of transmission itself. Given that the cost of transmission is increasing as a share of total wholesale power costs and now exceeds the cost of capacity in PJM, the cost effectiveness and competitiveness of the

<sup>36</sup> See *PJM*, Docket No. ER22-2110 (June 14, 2022).

<sup>37</sup> See *Building for the Future through Electric Regional Transmission Planning and Cost Allocation and Generator Interconnection*, Advanced Notice of Proposed Rulemaking, 176 FERC ¶ 61,024 (July 15, 2021).

transmission planning and procurement process should be addressed when considering reforms.

On June 16, 2022, the Commission issued a Notice of Proposed Rulemaking (NOPR).<sup>38</sup> The NOPR largely aligned with the PJM proposal that was endorsed by the IPRTF. The NOPR addresses reforms to implement a first ready/first served cluster study process, including cluster study costs and an allocation of network upgrade costs to the cluster, increased financial commitments and readiness requirements and improvements to the speed of the queue processing.

The MMU recommends improvements in queue management including that PJM establish a review process to ensure that projects are removed from the queue if they are not viable, as well as a process to allow commercially viable projects to advance in the queue ahead of projects which have failed to make progress, subject to rules to prevent gaming.<sup>39</sup>

## Interconnection Process Studies and Agreements<sup>40</sup>

In the study stage of the interconnection planning process, a series of studies are performed to determine the feasibility, impact, and cost of projects in the queue. Table 12-12 is an overview of the studies PJM perform in the study stage of the interconnection process. System impact and facilities studies are often redone when a project is withdrawn in order to determine the impact on the projects remaining in the queue.

**Table 12-12 Interconnection planning process: study stage**

Study	Purpose
Feasibility Study	The feasibility study determines preliminary estimates of the type, scope, cost and lead time for construction of facilities required to interconnect the project.
System Impact Study	The system impact study is a comprehensive regional analysis of the impact of adding the new generation and/or transmission facility to the system. The study identifies the system constraints related to the project and the necessary attachment facilities, local upgrades, and network upgrades. The study refines and more comprehensively estimates cost responsibility and construction lead times for facilities and upgrades.
Facilities Study	In the facilities study, stability analysis is performed and the system impact study results are modified as necessary to reflect changes in the characteristics of other projects in the queue.

<sup>38</sup> See *Improvements to Generator Interconnection Procedures and Agreements*, Notice of Proposed Rulemaking, 179 FERC ¶ 61,194 (June 16, 2022).

<sup>39</sup> Once implemented, the approved solutions from PJM's Interconnection Process Reform Task Force (IPRTF) should result in improvements in these areas.

<sup>40</sup> See "PJM Manual 14A: New Services Request Process," Rev. 29 (August 24, 2021) for a complete explanation of the interconnection process studies and agreements.

In 2016, the PJM Earlier Queue Submitted Task Force stakeholder group made changes to the interconnection process to address some of the issues related to delays observed in the various stages of the study phase. The changes became effective with the AC2 Queue that closed on March 31, 2017. The MMU recommends continuing analysis of the study phase of PJM's transmission planning to reduce the need for postponements of study results, to decrease study completion times, and to improve the likelihood that a project at a given phase in the study process will successfully go into service.

In addition to the feasibility, system impact and facilities studies, PJM may also perform additional studies under certain circumstances. These studies include the affected systems study, interim deliverability study and the long term firm transmission studies. Table 12-13 is an overview of the additional studies PJM may perform.

**Table 12-13 Interconnection planning process: study stage – additional studies**

Study	Purpose
Affected System Study	PJM and its neighboring balancing authorities conduct interconnection studies to determine the impacts of interconnection requests on the neighboring transmission system.
Interim Deliverability Studies	Interim deliverability studies are conducted on a periodic basis in support of RPM auctions and other interconnection studies to determine if a new facility may come on line prior to its scheduled date. These studies evaluate the available system capability and provide the customer(s) with the availability of service by planning year. Interim deliverability studies use the same criteria used for the evaluation of the need for reinforcements associated with a project under study.
Long Term Firm Transmission Studies	Transmission service requests that extend beyond the available transfer capability horizon of 18 months are evaluated along with the other requests for service in the PJM new services queue to ensure deliverability. Long term firm transmission studies follow the same feasibility, system impact and facilities study process as new generation.

After the completion of a facility study, the project will enter the construction stage of the interconnection process. The final agreements required depend on the type of project. These agreements include a Construction Service Agreement (CSA), Interconnection Service Agreement (ISA), Upgrade Construction Service Agreement (USCA), Wholesale Market Participant Agreement (WMPA) or Transmission Service Agreement (TSA). Table 12-14 is an overview of the agreements in the construction stage of the interconnection process.

**Table 12-14 Interconnection planning process: construction stage agreements**

Agreement	Purpose
Interconnection Service Agreement (ISA)	An ISA defines the generation or transmission developer's cost responsibility for required system upgrades. For generation interconnection customers, the ISA defines the capacity interconnection rights for a capacity resource and any operational restrictions or other limitations. For transmission interconnection customers, the ISA defines transmission injection and withdrawal rights and applicable incremental delivery, available transfer capability revenue and auction revenue rights.
Interim Interconnection Service Agreements (I-ISA)	If a developer wishes to start project construction activities prior to completion of the generation or transmission interconnection facilities study, the interim ISA would commit the developer to pay all costs incurred for the construction activities being advanced.
Interconnection Construction Service Agreement (CSA)	The CSA defines the standard terms and conditions of the interconnection, including construction responsibility, includes a construction schedule and contains notification and insurance obligations.
Upgrade Construction Service Agreement (USCA)	A new service customer who proposes to make an upgrade to an existing transmission facility or who seeks incremental auction revenue rights (IARRs) will receive an upgrade construction service agreement after their study process is completed.
Wholesale Market Participation Agreement (WMPA)	Developers interconnecting to non-FERC jurisdictional facilities who intend to participate in the PJM wholesale market will receive a three party agreement (WMPA). The WMPA is a non-Tariff agreement which must be filed with the FERC. The WMPA is essentially an ISA without interconnection provisions.

## Planned Generation Additions

Expected net revenues provide incentives to build new generation to serve PJM markets. The amount of planned new generation in PJM reflects investors' perception of the incentives provided by the combination of revenues from the PJM energy, capacity and ancillary service markets and from state subsidies and incentives. On June 30, 2022, 280,658.8 MW were in generation request queues for construction through 2029. Although it is clear that not all generation in the queues will be built, PJM has added capacity steadily since markets were implemented on April 1, 1999.<sup>41</sup>

There were 254,998.8 MW in generation queues, in the status of active, under construction or suspended, at the end of 2021. In the first six months of 2022, the AH2 window closed and the AI1 window opened. As projects move through the queue process, projects can be removed from the queue due to incomplete or invalid data, withdrawn by the market participant or placed in service. On June 30, 2022, there were 280,658.8 MW in generation queues, in the status of active, under construction or suspended, an increase of 25,660.0 MW (10.1 percent) from December 31, 2021. Table 12-15 shows MW in queues by expected

<sup>41</sup> See "PJM Generation Capacity and Funding Sources 2007/2008 through 2021/2022 Delivery Years," <[http://www.monitoringanalytics.com/reports/Reports/2020/IMM\\_2020\\_PJM\\_Generation\\_Capacity\\_and\\_Funding\\_Sources\\_2007/2008\\_through\\_2021/2022\\_DY\\_20200915.pdf](http://www.monitoringanalytics.com/reports/Reports/2020/IMM_2020_PJM_Generation_Capacity_and_Funding_Sources_2007/2008_through_2021/2022_DY_20200915.pdf)>.



completion year and MW changes in the queue between December 31, 2021, and June 30, 2022, for ongoing projects, i.e. projects with the status active, under construction or suspended.<sup>42</sup>

**Table 12-15 Queue comparison by expected completion year (MW): December 31, 2021 and June 30, 2022<sup>43</sup>**

Year	Year Change			
	As of 12/31/2021	As of 3/31/2022	MW	Percent
2008	0.0	0.0	0.0	0.0%
2009	0.0	0.0	0.0	0.0%
2010	0.0	0.0	0.0	0.0%
2011	0.0	0.0	0.0	0.0%
2012	0.0	0.0	0.0	0.0%
2013	0.0	0.0	0.0	0.0%
2014	0.0	0.0	0.0	0.0%
2015	0.0	0.0	0.0	0.0%
2016	3.4	3.4	0.0	0.0%
2017	386.3	306.3	(80.0)	(20.7%)
2018	668.6	468.6	(200.0)	(29.9%)
2019	4,470.6	3,073.1	(1,397.5)	(31.3%)
2020	7,032.4	5,973.7	(1,058.8)	(15.1%)
2021	22,828.1	20,977.5	(1,850.6)	(8.1%)
2022	42,078.1	41,522.4	(555.7)	(1.3%)
2023	55,347.4	56,424.5	1,077.1	1.9%
2024	59,949.2	65,097.8	5,148.6	8.6%
2025	35,510.5	43,810.9	8,300.4	23.4%
2026	8,636.2	20,560.7	11,924.5	138.1%
2027	5,840.1	11,579.1	5,739.0	98.3%
2028	2,508.0	4,700.8	2,192.8	87.4%
2029	2,460.1	4,560.1	2,100.0	85.4%
2030	0.0	0.0	0.0	0.0%
2031	0.0	1,600.0	1,600.0	0.0%
Total	247,718.9	280,658.8	32,939.9	13.3%

Table 12-16 shows the project status changes in more detail and how scheduled queue MW have changed between December 31, 2021, and June 30, 2022. For example, 40,174.3 MW entered the queue in the first six months of 2022. Of those 40,174.3 MW, 7,234.4 MW have been withdrawn. Of the total 236,808.2 MW marked as active on December 31, 2021, 2,719.2 MW were withdrawn, 2,183.3 MW were suspended, 1,698.7 MW started construction, and 67.5 MW

<sup>42</sup> Expected completion dates are entered when the project enters the queue. Actual completion dates are generally different than expected completion dates.

<sup>43</sup> Wind and solar capacity in Table 12-11 through Table 12-15 have not been adjusted to reflect derating.

went into service by June 30, 2022. Analysis of projects that were suspended on December 31, 2021 show that 2,711.0 MW came out of suspension and are now active as of June 30, 2022.

**Table 12-16 Change in project status (MW): December 31, 2021 to June 30, 2022**

Status at 12/31/2021 (Entered during 2022)	Status at 6/30/2022					
	Total at 12/31/2021	Active	In Service	Under Construction	Suspended	Withdrawn
Active	236,808.2	230,139.6	67.5	1,698.7	2,183.3	2,719.2
In Service	76,511.8	0.0	76,511.8	0.0	0.0	0.0
Under Construction	8,996.6	0.0	2,785.1	6,211.5	0.0	0.0
Suspended	9,120.9	2,711.0	0.0	0.0	4,774.9	1,635.0
Withdrawn	430,321.9	0.0	0.0	0.0	0.0	430,321.9
Total	761,759.3	265,790.5	79,364.4	7,910.2	6,958.1	441,910.4

On June 30, 2022, 280,658.8 MW were in generation request queues in the status of active, suspended or under construction. Table 12-17 shows each status by unit type. Of the 280,658.8 MW in the status of Active on June 30, 2022, 8,249.7 MW (3.1 percent) were combined cycle projects. Of the 7,910.2 MW in the status of under construction, 4,357.7 MW (55.1 percent) were combined cycle projects. A significant amount of renewable hybrid projects (defined as solar + storage, solar + wind and wind + storage projects) have entered the queue in recent years. Of the 280,658.8 MW in the status of Active on June 30, 2022, 36,969.8 MW (13.2 percent) were renewable hybrid projects. Of the 7,910.2 MW in the status of under construction, 5.7 MW (0.07 percent) were renewable hybrid projects.

Table 12-17 Current project status (MW) by unit type: June 30, 2022

	CT -		Natural Gas	CT -		Fuel Cell	Hydro - Pumped Storage	Hydro - Run of River	Nuclear	RICE -		RICE - Other	Solar + Storage	Solar + Wind	Steam -			Wind +		Total		
	Battery	Cycle		- Oil	Other					Natural Gas	RICE - Oil				Natural Gas	Coal	Natural Gas	Oil	Other		Wind	Storage
Active	49,533.5	8,249.7	3,253.8	4.0	396.6	5.0	730.0	112.8	145.5	14.4	0.0	0.0	123,080.7	36,609.9	209.0	29.0	6.0	0.0	20.0	43,390.7	0.0	265,790.5
Suspended	29.0	2,700.0	1,368.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	2,348.4	38.9	0.0	0.0	0.0	0.0	0.0	367.6	106.3	6,958.1
Under Construction	14.0	4,357.7	527.0	13.0	0.0	3.0	0.0	0.0	44.0	0.0	0.0	0.0	2,704.7	5.7	0.0	36.0	5.0	0.0	0.0	200.0	0.0	7,910.2
Total	49,576.5	15,307.4	5,148.8	17.0	396.6	8.0	730.0	112.8	189.5	14.4	0.0	0.0	128,133.8	36,654.5	209.0	65.0	11.0	0.0	20.0	43,958.2	106.3	280,658.8

A significant shift in the distribution of unit types within the PJM footprint continues to develop as natural gas fired units and renewable, hybrid and other intermittent resources enter the queue and coal fired steam units retire. As of June 30, 2022, of the 280,658.8 MW in the generation request queues in the status of active, suspended or under construction, 128,133.8 MW (45.7 percent) were solar projects, 43,958.2 MW (15.7 percent) were wind projects, 20,481.6 MW (7.3 percent) were natural gas fired projects (including combined cycle units, CTs, RICE units, and natural gas fired steam units), 36,969.8 MW (13.2 percent) were renewable hybrid projects (solar + storage, solar + wind and wind + storage units), and 65.0 MW (0.02 percent) were coal fired steam projects.

As of June 30, 2022, there are 4,694.0 MW of coal fired steam units and 132.6 MW of natural gas units slated for deactivation between July 1, 2022, and December 31, 2024 (See Table 12-11). The ongoing replacement of coal fired steam units by natural gas units will continue to significantly affect future congestion, the role of firm and interruptible gas supply, and natural gas supply infrastructure. The small but growing level of renewables, hybrids and other intermittents will also have increasingly significant impacts on the energy and capacity markets.

Table 12-18 shows the total MW in the status of active, in service, under construction, suspended, or withdrawn for each queue since the beginning of the RTEP process and the total MW that had been included in each queue. All items in queues A-R are either in service or have been withdrawn. As of June 30, 2022, there are 280,658.8 MW in queues that are not yet in service or withdrawn, of which 2.5 percent are suspended, 2.8 percent are under construction and 94.7 percent have not begun construction.

Table 12-18 Queue totals by status (MW): June 30, 2022<sup>44</sup>

Queue	Active	In Service	Under Construction	Suspended	Withdrawn	Total
A Expired 31-Jan-98	0.0	9,094.0	0.0	0.0	17,252.0	26,346.0
B Expired 31-Jan-99	0.0	4,292.4	0.0	0.0	14,958.8	19,251.2
C Expired 31-Jul-99	0.0	531.0	0.0	0.0	3,558.3	4,089.3
D Expired 31-Jan-00	0.0	850.6	0.0	0.0	7,358.0	8,208.6
E Expired 31-Jul-00	0.0	795.2	0.0	0.0	8,021.8	8,817.0
F Expired 31-Jan-01	0.0	52.0	0.0	0.0	3,092.5	3,144.5
G Expired 31-Jul-01	0.0	1,171.6	0.0	0.0	17,961.8	19,133.4
H Expired 31-Jan-02	0.0	702.5	0.0	0.0	8,421.9	9,124.4
I Expired 31-Jul-02	0.0	103.0	0.0	0.0	3,728.4	3,831.4
J Expired 31-Jan-03	0.0	42.0	0.0	0.0	846.0	888.0
K Expired 31-Jul-03	0.0	93.1	0.0	0.0	485.3	578.4
L Expired 31-Jan-04	0.0	256.5	0.0	0.0	4,033.7	4,290.2
M Expired 31-Jul-04	0.0	504.8	0.0	0.0	3,705.6	4,210.4
N Expired 31-Jan-05	0.0	2,398.8	0.0	0.0	8,129.3	10,528.0
O Expired 31-Jul-05	0.0	1,890.2	0.0	0.0	5,466.8	7,357.0
P Expired 31-Jan-06	0.0	3,290.3	0.0	0.0	5,200.5	8,490.8
Q Expired 31-Jul-06	0.0	3,147.9	0.0	0.0	11,385.7	14,533.6
R Expired 31-Jan-07	0.0	1,892.5	0.0	0.0	20,660.9	22,553.4
S Expired 31-Jul-07	70.0	3,543.5	0.0	0.0	12,396.5	16,010.0
T Expired 31-Jan-08	0.0	4,196.5	0.0	0.0	23,313.3	27,509.8
U1 Expired 30-Apr-08	0.0	218.9	0.0	0.0	7,937.8	8,156.7
U2 Expired 31-Jul-08	0.0	777.5	0.0	0.0	16,218.6	16,996.1
U3 Expired 31-Oct-08	0.0	333.0	0.0	0.0	2,635.6	2,968.6
U4 Expired 31-Jan-09	0.0	85.2	0.0	0.0	4,945.0	5,030.2
V1 Expired 30-Apr-09	0.0	197.9	0.0	0.0	2,572.8	2,770.7
V2 Expired 31-Jul-09	0.0	989.9	16.1	0.0	3,625.1	4,631.1
V3 Expired 31-Oct-09	0.0	1,132.0	0.0	0.0	3,822.7	4,954.7
V4 Expired 31-Jan-10	0.0	748.8	0.0	0.0	3,708.0	4,456.8
W1 Expired 30-Apr-10	0.0	567.4	0.0	0.0	5,139.5	5,706.9
W2 Expired 31-Jul-10	0.0	351.7	0.0	0.0	3,051.7	3,403.4
W3 Expired 31-Oct-10	0.0	508.7	0.0	0.0	8,695.9	9,204.6
W4 Expired 31-Jan-11	0.0	1,415.8	0.0	0.0	4,152.6	5,568.4
X1 Expired 30-Apr-11	0.0	1,103.8	0.0	0.0	6,200.6	7,304.4
X2 Expired 31-Jul-11	0.0	3,706.4	0.0	0.0	5,578.4	9,284.7
X3 Expired 31-Oct-11	0.0	89.2	20.0	0.0	7,665.9	7,775.1
X4 Expired 31-Jan-12	0.0	2,948.9	0.0	0.0	2,419.4	5,368.3
Y1 Expired 30-Apr-12	0.0	1,795.5	0.0	0.0	6,279.7	8,075.2
Y2 Expired 31-Oct-12	0.0	1,657.2	0.0	0.0	9,636.5	11,293.7
Y3 Expired 30-Apr-13	0.0	1,630.5	0.0	0.0	4,609.2	6,239.6
Z1 Expired 31-Oct-13	0.0	3,094.5	0.0	975.3	4,055.0	8,124.8
Z2 Expired 30-Apr-14	10.0	3,063.0	0.0	0.0	3,027.8	6,100.8
AA1 Expired 31-Oct-14	90.2	4,678.9	340.0	463.0	6,498.4	12,070.5
AA2 Expired 30-Apr-15	1,569.0	1,825.6	1,199.0	0.0	11,472.7	16,066.3
AB1 Expired 31-Oct-15	2,376.8	1,439.1	1,387.6	1,591.0	13,649.3	20,443.7
AB2 Expired 31-Mar-16	512.9	1,972.5	1,525.1	566.9	10,588.4	15,165.8
AC1 Expired 30-Sep-16	2,260.3	2,653.4	2,379.0	1,610.8	11,138.9	20,042.2
AC2 Expired 30-Apr-17	2,433.6	577.1	146.4	296.7	9,147.8	12,601.6
AD1 Expired 30-Sep-17	4,927.1	313.9	175.8	377.5	5,508.3	11,302.6
AD2 Expired 31-Mar-18	5,687.3	432.5	540.8	178.0	13,525.0	20,363.6
AE1 Expired 30-Sep-18	14,523.3	101.4	89.4	330.6	18,852.1	33,896.9
AE2 Expired 31-Mar-19	21,307.0	73.5	20.9	338.4	12,087.8	33,827.5
AF1 Expired 30-Sep-19	21,066.4	18.8	60.0	145.9	7,641.9	28,932.9
AF2 Expired 31-Mar-20	20,881.3	13.0	5.1	54.1	7,295.1	28,248.6
AG1 Expired 30-Sep-20	32,260.3	0.5	5.0	30.0	5,872.5	38,168.3
AG2 Expired 31-Mar-21	55,515.0	0.0	0.0	0.0	1,234.3	56,749.3
AH1 Expired 10-Sep-21	45,811.5	0.0	0.0	0.0	4,127.1	49,938.6
AH2 Expired 10-Mar-22	27,478.3	0.0	0.0	0.0	6,676.5	34,154.7
AI1 Opened 01-Apr-22	7,010.2	0.0	0.0	0.0	639.8	7,650.0
Total	265,790.5	79,364.4	7,910.2	6,958.1	441,910.4	801,933.6

<sup>44</sup> Projects listed as partially in service are counted as in service for the purposes of this analysis.

Table 12-19 shows the projects with a status of active, suspended or under construction, by unit type, and control zone. As of June 30, 2022, 280,658.8 MW were in generation request queues for construction through 2029. Table 12-19 also shows the planned retirements for each zone.

**Table 12-19 Queue totals for projects (active, suspended and under construction) by LDA, control zone and unit type (MW): June 30, 2022<sup>45</sup>**

LDA	Zone	Battery	CC	CT -		Fuel Cell	Hydro -		Nuclear	RICE -			Solar +			Steam -			Wind + Storage	Total Queue Capacity	Planned Retirements		
				Natural Gas	Oil		Other	Pumped Storage		of River	Natural Gas	Oil	Other	Solar	Storage	Wind	Coal	Natural Gas				Oil	Other
EMAAC	ACEC	1,773.0	0.0	230.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	669.9	221.0	0.0	0.0	0.0	0.0	0.0	3,441.6	0.0	6,335.5	1.9
	DPL	1,064.0	451.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	2,459.7	270.0	0.0	0.0	0.0	0.0	0.0	7,671.5	0.0	11,916.1	410.0
	JCPLC	913.8	0.0	0.0	0.0	0.0	0.0	30.0	0.0	0.0	0.0	0.0	472.3	235.0	0.0	0.0	0.0	0.0	0.0	10,372.5	0.0	12,023.6	0.0
	PECO	0.0	5.0	0.0	0.0	0.0	0.0	0.0	0.0	44.0	0.0	0.0	125.6	5.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	179.6	0.0
	PSEG	1,782.0	51.1	675.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	59.2	22.6	0.0	0.0	5.0	0.0	0.0	1,300.0	0.0	3,894.9	0.0
	REC	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
	EMAAC Total	5,532.8	507.1	905.0	0.0	0.0	0.0	30.0	0.0	44.0	0.0	0.0	3,786.7	753.6	0.0	0.0	5.0	0.0	0.0	22,785.6	0.0	34,349.6	411.9
SWMAAC	BGE	1,198.5	0.0	0.0	0.0	0.0	0.0	0.0	0.0	45.5	0.0	0.0	154.9	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1,398.9	0.0
	PEPCO	796.0	45.0	55.3	4.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	240.1	1,452.0	0.0	0.0	6.0	0.0	0.0	0.0	0.0	2,598.4	32.0
	SWMAAC Total	1,994.5	45.0	55.3	4.0	0.0	0.0	0.0	0.0	45.5	0.0	0.0	395.1	1,452.0	0.0	0.0	6.0	0.0	0.0	0.0	0.0	3,997.4	32.0
WMAAC	MEC	955.2	75.0	11.5	7.5	0.0	0.0	0.0	0.0	0.0	0.0	0.0	901.4	162.1	0.0	0.0	0.0	0.0	0.0	0.0	0.0	2,112.7	0.0
	PE	997.8	85.0	585.5	0.0	3.6	3.0	0.0	0.0	0.0	0.0	0.0	6,396.0	1,191.8	0.0	0.0	0.0	0.0	0.0	503.7	0.0	9,766.5	0.0
	PPL	495.0	106.6	0.0	0.0	0.0	0.0	700.0	0.0	100.0	0.0	0.0	2,568.3	741.0	0.0	0.0	0.0	0.0	0.0	416.9	90.0	5,217.8	52.6
	WMAAC Total	2,448.0	266.6	597.0	7.5	3.6	3.0	700.0	0.0	100.0	0.0	0.0	9,865.7	2,094.9	0.0	0.0	0.0	0.0	0.0	920.6	90.0	17,096.9	52.6
Non-MAAC	AEP	11,035.9	5,530.0	842.1	0.0	379.2	0.0	0.0	51.0	0.0	0.0	0.0	42,927.9	14,919.8	0.0	65.0	0.0	0.0	0.0	3,523.0	0.0	79,273.8	80.0
	APS	2,944.8	5,070.0	100.0	0.0	0.0	0.0	0.0	15.0	0.0	14.4	0.0	6,475.1	2,737.3	0.0	0.0	0.0	0.0	0.0	1,029.1	16.3	18,402.0	1,278.0
	ATSI	2,218.0	1,953.0	523.7	5.5	0.0	0.0	0.0	0.0	0.0	0.0	0.0	6,852.6	891.6	0.0	0.0	0.0	0.0	0.0	798.1	0.0	13,242.5	1,520.7
	COMED	7,376.1	1,836.7	964.2	0.0	0.0	5.0	0.0	0.0	0.0	0.0	0.0	13,670.9	2,888.5	199.0	0.0	0.0	0.0	0.0	9,483.2	0.0	36,423.6	510.0
	DAY	340.0	0.0	20.0	0.0	13.8	0.0	0.0	0.0	0.0	0.0	0.0	3,358.5	415.9	0.0	0.0	0.0	0.0	0.0	0.0	0.0	4,148.2	0.0
	DUKE	277.2	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	678.9	40.0	10.0	0.0	0.0	0.0	0.0	0.0	0.0	1,006.1	0.0
	DLCO	205.0	0.0	3.5	0.0	0.0	0.0	0.0	46.8	0.0	0.0	0.0	88.9	107.5	0.0	0.0	0.0	0.0	20.0	0.0	0.0	471.7	0.0
	DOM	15,028.2	99.0	1,138.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	33,597.6	7,378.8	0.0	0.0	0.0	0.0	0.0	5,418.8	0.0	62,660.4	1,027.0
	EKPC	176.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	6,006.0	2,796.3	0.0	0.0	0.0	0.0	0.0	0.0	0.0	8,978.3	0.0
	OVEC	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	430.0	178.5	0.0	0.0	0.0	0.0	0.0	0.0	0.0	608.5	0.0
	RMU	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
	Non-MAAC Total	39,601.2	14,488.7	3,591.5	5.5	393.0	5.0	0.0	112.8	0.0	14.4	0.0	114,086.4	32,354.0	209.0	65.0	0.0	0.0	20.0	20,252.1	16.3	225,214.9	4,415.7
	Total	49,576.5	15,307.4	5,148.8	17.0	396.6	8.0	730.0	112.8	189.5	14.4	0.0	128,133.8	36,654.5	209.0	65.0	11.0	0.0	20.0	43,958.2	106.3	280,658.8	4,912.2

Since wind resources cannot be dispatched on demand, PJM rules previously required that the unforced capacity of wind resources be derated to 20 percent of nameplate capacity until actual generation data are available. Beginning with Queue U, PJM derated wind resources to 13 percent of nameplate capacity until there was operational data to support a different conclusion.<sup>46</sup> PJM derated solar resources to 38 percent of nameplate capacity. Effective June 1, 2017, PJM adjusted the derates of wind and solar resources. The capacity factor derates for wind resources are dependent on the wind farm locations and have an average derate of 16.2 percent. The capacity factor derates for solar resources are dependent on the solar installation type and have an average derate of 46.7 percent.

Beginning with the 2023/2024 Delivery Year, unforced capacity for intermittent resources and limited duration resources will be determined by PJM’s effective load carrying capability (ELCC) analysis. The PJM ELCC analysis will determine capacity derates by resource class. The unforced capacity derate for a specific resource will equal the product of the ELCC class rating and a resource specific performance factor. The 2023/2024 ELCC class rating for wind resources is 15.0 percent, for solar resources with tracking panels is 54.0 percent and for solar resources with fixed panels is 38.0 percent.<sup>47</sup> The ELCC class rating for battery or energy storage resources replaces the 10 hour rule that was previously used to determine the unforced capacity value for an energy storage resource. PJM

<sup>45</sup> This data includes only projects with a status of active, under construction, or suspended.

<sup>46</sup> See "PJM Manual 14B: PJM Region Transmission Planning Process," Rev. 51 (December 15, 2021).

<sup>47</sup> ELCC Class Ratings for 2023-2024 BRA, PJM Interconnection LLC. (December 16, 2021) <<https://www.pjm.com/planning/resource-adequacy-planning/effective-load-carrying-capability>>

defined four different energy storage classes differentiated by duration. The ELCC class rating is 83.0 percent for storage resources that can continuously generate energy at the nameplate capacity for four hours (four hour storage). The ELCC class rating is 98.0 percent for six hour storage and 100 percent for 8 hour storage and 10 hour storage.<sup>48</sup> Using the ELCC derate factors, based on the derating of 43,958.2 MW of wind resources to 6,593.7 MW, 128,133.8 MW of solar resources to 69,192.3 MW, 36,654.5 MW of solar + storage resources to 19,793.4 MW, 209.0 MW of solar + wind resources to 112.9 MW, 106.3 MW of wind + storage resources to 15.9 MW and 49,576.5 MW of battery resources to 41,148.5 MW, the 280,658.8 MW currently under construction, suspended or active in the queue would be reduced to 158,877.2 MW.<sup>49</sup>

### Withdrawn Projects

The queue contains a substantial number of projects that are not likely to be built. The queue process results in a substantial number of projects that are withdrawn. Manual 14B requires PJM to apply a commercial probability factor at the feasibility study stage to improve the accuracy of capacity and cost estimates. The commercial probability factor is based on the historical incidence of projects dropping out of the queue at the impact study stage, but the actual calculation of commercial probability factors is less than transparent.<sup>50</sup> The impact and facilities studies are performed using the full amount of planned generation in the queues. The actual withdrawal rates are shown in Table 12-20 and Table 12-21.

Table 12-20 shows the milestone status when projects were withdrawn, for all withdrawn projects. Of the 3,405 projects withdrawn as of June 30, 2022, 1,716 (50.4 percent) were withdrawn before the system impact study was completed. Once a Construction Service Agreement (CSA) is executed, the financial obligation for any necessary transmission upgrades cannot be retracted. Of the 3,405 projects withdrawn, 638 (18.7 percent) were withdrawn after the completion of a Construction Service Agreement.

<sup>48</sup> Additional information available in *PJM Manual 21A: Determination of Accredited UCAP Using Effective Load Carrying Capability Analysis*, PJM Interconnection LLC. (August 1, 2021).

<sup>49</sup> The ELCC derate adjusted MW are calculated using the four hour storage ELCC derate of 83.0 percent for battery resources, 15.0 percent ELCC derate for wind resources and 54.0 percent ELCC derate for solar resources.

<sup>50</sup> See "PJM Manual 14B: PJM Region Transmission Planning Process," Rev. 51 (December 15, 2021).

**Table 12-20 Last milestone at time of withdrawal: January 1, 1997 through June 30, 2022**

Milestone Completed	Projects Withdrawn	Percent	Average Days	Maximum Days
Never Started	682	20.0%	232	1,062
Feasibility Study	1,034	30.4%	268	1,633
System Impact Study	739	21.7%	709	3,248
Facilities Study	312	9.2%	1,138	4,107
Construction Service Agreement (CSA) or beyond	638	18.7%	1,383	7,864
Total	3,405	100.0%		

### Average Time in Queue

Table 12-21 shows the time spent at various stages in the queue process and the completion time for the studies performed. For completed projects, there is an average time of 1,107 days, or 3.0 years, between entering a queue and going into service. For withdrawn projects, there is an average time of 631 days, or 1.7 years, between entering a queue and withdrawing.

**Table 12-21 Project queue times by status (days): June 30, 2022<sup>51</sup>**

Status	Average (Days)	Standard Deviation	Maximum
Active	664	480	5,582
In-Service	1,107	795	5,306
Suspended	1,566	617	3,264
Under Construction	1,786	720	4,780
Withdrawn	631	747	7,864

Table 12-22 presents information on the time in the stages of the queue for those projects not yet in service or already withdrawn. Of the 3,112 projects in the queue as of June 30, 2022, 184 (5.9 percent) had a completed feasibility study and 460 (14.8 percent) had a completed construction service agreement.

<sup>51</sup> The queue data shows that some projects were withdrawn and a withdrawal date was not identified. These projects were removed for the purposes of this analysis.

**Table 12-22 Project queue times by milestone (days): June 30, 2022**

Milestone Reached	Number of Projects	Percent of Total Projects	Average Days	Maximum Days
Under Review	1,593	51.2%	812	1,155
Feasibility Study	184	5.9%	689	1,098
System Impact Study	840	27.0%	988	2,212
Facilities Study	35	1.1%	1,489	2,465
Construction Service Agreement (CSA) or beyond	460	14.8%	1,525	5,582
Total	3,112	100.0%		

Table 12-23 shows the time spent in the queue by fuel type, and year the project entered the queue, for projects that are in service. The time from when a project enters the queue to the time the project goes in service has generally been decreasing compared to the period prior to 2017 although there are significant exceptions. For example, for a battery project entering the queue in 2015, there was an average of 1,082 days from the time it entered the queue until it went in service, compared to only 293 days when entering the queue in 2018, but the time increased to 600 days for battery projects entering the queue in 2019.

**Table 12-23 Average time in queue (days) by fuel type and year submitted (In Service Projects): June 30, 2022<sup>52</sup>**

Unit Type	2010	2011	2012	2013	2014	2015	2016	2017	2018	2019	2020	2021	2022
Battery	983	609	417	692	789	1,082	941	383	293	600	544		
CC	1,310	1,551	1,663	1,419	1,175	1,052	944	908	309	512			
CT - Natural Gas	1,131	804	953	1,073	734	619	1,404	932	690	395	319		
CT - Oil	717		259										
CT - Other	729	634	954	1,248	718	360							
Fuel Cell						827	643						
Hydro - Pumped Storage						1,402							
Hydro - Run of River			1,325	614	332		580	426	606				
Nuclear	885	866	0	1,234									
RICE - Natural Gas			1,702	1,053	1,332	798		250					
RICE - Oil						1,849							
RICE - Other	638	1,385	1,479	241	627	622	491		466				
Solar	1,701	1,313	969	1,014	1,003	1,534	1,336	997	892	380	413		
Solar + Storage									553				
Solar + Wind													
Steam - Coal	745		513	1,010	583	853	684	647	1,122				
Steam - Natural Gas				1,182		421	751						
Steam - Oil													
Steam - Other	256	838	643										
Wind	2,748	2,711	1,750	1,589	1,205	1,463	1,443	1,200	934				
Wind + Storage													

52 A blank cell in this table means that no project of that fuel type, which was submitted to the queue in that year, subsequently went in service.

## Completion Rates

The probability of a project going into service increases as each step of the planning process is completed. Table 12-24 shows the historic completion rates (MW energy) by unit type for projects that have completed the system impact study (SIS), facilities study agreement (FSA) and any milestone completed beyond the FSA including a Construction Service Agreement (CSA), Interconnection Service Agreement (ISA), Upgrade Construction Service Agreement (UCSA) and Wholesale Market Participant Agreement (WMPA) as well as the historic completion rates for all projects including those withdrawn before reaching the SIS milestone.<sup>53</sup> For each unit type, the total MW in service was divided by the total energy MW entered in the queue. To calculate the completion rates for projects that reached the individual milestones, only those projects that reached a final status of withdrawn or in service were evaluated. For example, if a project was withdrawn after the completion of its SIS, but before the completion of the FSA, the totals would be included in the calculation of the SIS completion rate, but not in the calculation of the FSA or CSA completion rates. Similarly, if a project was withdrawn after the completion of its FSA, but before the completion of the CSA, the totals would be included in the calculation of the SIS and FSA completion rates, but not in the calculation of the CSA completion rate. The completion rates show that of all battery projects to ever enter the queue and complete the system impact study stage, 11.8 percent of the queued MW have gone into service. The completion rate for battery projects increases to 31.1 percent when battery projects complete the facility study agreement and further increases to 39.4 percent when battery projects complete the construction service agreement. Of all battery projects to enter the queue, only 0.5 percent of the queued MW have gone into service.

53 All milestones after the FSA are included in the totals under the CSA headings of the tables within Section 12, "Generation and Transmission Planning."

Table 12-24 Historic completion rates (MW energy) by unit type for projects with a completed SIS, FSA and CSA: June 30, 2022

Unit Type	Completion Rate (SIS)	Completion Rate (FSA)	Completion Rate (CSA)	Completion Rate (ALL)
Battery	11.8%	31.1%	39.4%	0.5%
CC	32.7%	49.5%	74.6%	15.3%
CT - Natural Gas	64.3%	78.3%	82.2%	42.5%
CT - Oil	35.4%	59.6%	90.8%	25.4%
CT - Other	12.3%	18.6%	29.8%	8.4%
Fuel Cell	30.6%	31.6%	31.6%	30.2%
Hydro - Pumped Storage	100.0%	100.0%	100.0%	24.1%
Hydro - Run of River	42.5%	60.0%	67.2%	20.9%
Nuclear	35.2%	42.1%	51.3%	28.6%
RICE - Natural Gas	30.7%	42.8%	47.4%	25.9%
RICE - Oil	34.0%	59.7%	59.7%	24.6%
RICE - Other	89.0%	91.4%	92.0%	78.1%
Solar	19.5%	42.9%	52.6%	2.7%
Solar + Storage	0.0%	2.6%	2.6%	0.0%
Solar + Wind	0.0%	0.0%	0.0%	0.0%
Steam - Coal	13.7%	25.5%	37.6%	6.3%
Steam - Natural Gas	91.1%	91.1%	91.1%	90.0%
Steam - Oil	0.0%	0.0%	0.0%	0.0%
Steam - Other	30.4%	39.9%	47.8%	27.1%
Wind	19.0%	36.3%	51.9%	7.4%
Wind + Storage	0.0%	0.0%	0.0%	0.0%

On June 30, 2022, 280,658.8 MW were in generation request queues in the status of active, under construction or suspended. Of the total 280,658.8 MW in the queue, 123,073.0 MW (43.9 percent) have reached at least the SIS milestone and 157,585.8 MW (56.1 percent) have not received a completed SIS. Based on historical completion rates, (applying the unit type specific completion rates for those projects that have reached the SIS, FSA or any milestone beyond the FSA, and using the overall completion rates for those projects that have not yet reached the SIS milestone), 40,144.6 MW (14.3 percent) of new generation in the queue are expected to go into service.

Table 12-25 shows the percent of all project MW, by unit type, to go in service by year submitted to the queue. Of all battery projects that entered the queue in 2010, 65.5 percent reached the status of in service by June 30, 2022. Of all battery projects that entered the queue in 2016, only 1.3 percent have reached the status of in service as of June 30, 2022.

**Table 12-25 Percent of all projects (MW energy) to go in service by unit type and year submitted to the queue: June 30, 2022**

Unit Type	2010	2011	2012	2013	2014	2015	2016	2017	2018	2019	2020	2021	2022
Battery	65.5%	8.3%	15.1%	43.9%	21.5%	7.7%	1.3%	4.1%	0.3%	0.0%	0.0%	0.0%	0.0%
CC	14.6%	24.5%	30.8%	35.6%	53.6%	5.6%	11.2%	6.1%	1.2%	0.5%	0.0%	0.0%	0.0%
CT - Natural Gas	100.0%	98.3%	89.7%	42.2%	32.0%	0.2%	11.1%	23.6%	4.8%	2.5%	0.4%	0.0%	0.0%
CT - Oil	100.0%	NA	1.2%	0.0%	0.0%	NA	NA	NA	0.0%	0.0%	0.0%	NA	NA
CT - Other	28.8%	27.1%	36.1%	100.0%	0.0%	100.0%	NA	0.0%	NA	NA	NA	0.0%	NA
Fuel Cell	NA	NA	NA	NA	NA	67.4%	12.5%	0.0%	NA	0.0%	NA	0.0%	NA
Hydro - Pumped Storage	NA	NA	NA	NA	NA	100.0%	NA	NA	0.0%	0.0%	NA	0.0%	NA
Hydro - Run of River	0.0%	0.0%	57.6%	49.6%	11.2%	NA	100.0%	26.8%	100.0%	0.0%	0.0%	0.0%	NA
Nuclear	15.5%	1.6%	0.0%	100.0%	NA	NA	0.0%	71.6%	0.0%	NA	0.0%	NA	NA
RICE - Natural Gas	NA	NA	100.0%	66.7%	5.4%	6.2%	0.0%	5.4%	NA	NA	NA	0.0%	NA
RICE - Oil	0.0%	0.0%	NA	NA	NA	30.8%	NA	NA	NA	NA	NA	NA	0.0%
RICE - Other	100.0%	100.0%	100.0%	100.0%	79.7%	25.5%	2.8%	0.0%	100.0%	NA	NA	NA	NA
Solar	10.7%	7.1%	16.9%	24.4%	30.7%	22.5%	15.7%	1.7%	0.6%	0.0%	0.0%	0.0%	0.0%
Solar + Storage	NA	NA	NA	NA	NA	0.0%	0.0%	0.0%	0.0%	0.0%	0.0%	0.0%	0.0%
Solar + Wind	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	0.0%	0.0%	NA
Steam - Coal	100.0%	0.0%	1.4%	68.4%	1.2%	23.4%	37.5%	100.0%	22.4%	0.0%	NA	NA	NA
Steam - Natural Gas	NA	NA	NA	100.0%	0.0%	100.0%	100.0%	100.0%	NA	NA	0.0%	NA	NA
Steam - Oil	0.0%	0.0%	0.0%	0.0%	0.0%	0.0%	0.0%	0.0%	0.0%	0.0%	0.0%	0.0%	0.0%
Steam - Other	0.5%	61.2%	16.6%	0.0%	0.0%	NA	NA	NA	NA	NA	NA	0.0%	NA
WInd	6.1%	3.4%	2.5%	5.8%	20.7%	12.5%	12.3%	2.6%	0.6%	0.0%	0.0%	0.0%	0.0%
Wind + Storage	NA	NA	NA	NA	NA	NA	0.0%	0.0%	NA	NA	NA	NA	NA
All	11.7%	18.9%	26.5%	34.3%	40.3%	9.0%	12.9%	3.6%	0.9%	0.1%	0.0%	0.0%	0.0%



## Queue Analysis by Fuel Group

The time it takes to complete a study depends on the backlog and the number of projects in the queue, but not on the size of the project. Table 12-26 shows the number of projects that entered the queue by year and by fuel group. The fuel groups are nuclear units, renewable units (including solar, hydro, biomass, renewable hybrid and wind) and traditional units (all other fuels). The number of queue entries has increased during the past several years, primarily by renewable projects. Of the 4,904 projects entered from January 2015 through June 2022, 3,634 projects (74.1 percent) were renewable. Of the 373 projects entered in the first six months of 2022, 254 projects (68.1 percent) were renewable.

**Table 12-26 Number of projects entered in the queue: June 30, 2022**

Year Entered	Fuel Group			Total
	Nuclear	Renewable	Traditional	
1997	2	0	11	13
1998	0	0	18	18
1999	1	5	84	90
2000	2	3	78	83
2001	4	6	81	91
2002	3	15	33	51
2003	1	34	18	53
2004	4	17	33	54
2005	3	75	55	133
2006	9	65	81	155
2007	9	65	145	219
2008	3	102	111	216
2009	10	107	56	173
2010	5	370	66	441
2011	6	264	85	355
2012	2	59	98	159
2013	1	54	99	154
2014	0	100	92	192
2015	0	134	175	309
2016	2	298	99	399
2017	2	293	60	355
2018	1	344	95	440
2019	0	546	151	697
2020	2	782	213	997
2021	0	983	351	1,334
2022	0	254	119	373
Total	72	4,975	2,507	7,554

As of June 30, 2022, renewable projects make up 75.3 percent of all projects in the queue and those projects account for 74.8 percent of the nameplate MW currently active, suspended or under construction in the queue as of June 30, 2022 (Table 12-27).

**Table 12-27 Queue details by fuel group: June 30, 2022**

Fuel Group	Number of Projects	Percent of Projects	MW	Percent MW
Nuclear	6	0.2%	189.5	0.1%
Renewable	2,343	75.3%	209,912.6	74.8%
Traditional	763	24.5%	70,556.7	25.1%
Total	3,112	100.0%	280,658.8	100.0%

Historical completion rates for renewable projects may not be an accurate predictor of completion rates for current renewable projects. The outcomes for current projects will provide additional information and improve the ability to assess the likely future generation mix based on the type of projects in the queue.

While renewables currently make up the majority of both projects and nameplate MW in the queue, historical completion rates and derating factors must be accounted for when evaluating the share of capacity resources that are likely to be contributed by renewables (Table 12-24). Table 12-28 shows the total MW of all projects in the queue as of June 30, 2022, in the status of active, suspended and under construction, by unit type. Table 12-28 also shows the total MW for each fuel type adjusted based on current historical completion rates and for battery, solar and wind ELCC derates. Of the 15,307.4 MW of combined cycle projects in the queue, 9,021.2 MW (58.9 percent) are expected to go in service based on historical completion rates as of June 30, 2022. Of the 209,932.6 MW of renewable projects in the queue, only 26,205.8 MW (12.5 percent) are expected to go in service based on historical completion rates. Of the 209,932.6 MW of renewable projects in the queue, only 11,745.5 MW (5.6 percent) of capacity resources are expected to go into service, based on both historical completion rates and ELCC derate factors for battery, wind and solar.

**Table 12-28 Queue totals for projects (active, suspended and under construction) by unit type adjusted based on current historical completion rates and ELCC battery, solar and wind derates (MW): June 30, 2022<sup>54</sup>**

Unit Type	MW in Queue	Completion Rate Adjusted MW in Queue	Completion Rate and ELCC Adjusted MW in Queue
Battery	49,576.5	1,363.2	1,131.5
CC	15,307.4	9,021.2	9,021.2
CT - Natural Gas	5,148.8	3,398.6	3,398.6
CT - Oil	17.0	13.2	13.2
CT - Other	396.6	33.3	33.3
Fuel Cell	8.0	2.5	2.5
Hydro - Pumped Storage	730.0	707.2	707.2
Hydro - Run of River	112.8	52.3	52.3
Nuclear	189.5	73.8	73.8
RICE - Natural Gas	14.4	3.7	3.7
RICE - Oil	0.0	0.0	0.0
RICE - Other	0.0	0.0	0.0
Solar	128,133.8	18,330.2	9,898.3
Solar + Storage	36,654.5	34.8	18.8
Solar + Wind	209.0	0.0	0.0
Steam - Coal	65.0	21.8	21.8
Steam - Natural Gas	11.0	10.0	10.0
Steam - Oil	0.0	0.0	0.0
Steam - Other	20.0	5.4	5.4
Wind	43,958.2	7,073.3	1,061.0
Wind + Storage	106.3	0.0	0.0
Total	280,658.8	40,144.6	25,452.6

<sup>54</sup> The derate adjusted MW in this table are calculated using the four hour storage ELCC derate of 83.0 percent for battery resources, 15.0 percent ELCC derate for wind resources and 54.0 percent ELCC derate for solar resources.

## Queue Analysis by Unit Type and Project Classification

Table 12-29 shows the current status of all generation queue projects by unit type and project classification from January 1, 1997, through June 30, 2022. As of June 30, 2022, 7,554 projects, representing 801,933.6 MW, have entered the queue process since its inception. Of those, 1,037 projects, representing 79,364.4 MW, went into service. Of the projects that entered the queue process, 3,405 projects, representing 441,910.4 MW (55.1 percent of the MW) withdrew prior to completion. Such projects may create barriers to entry for projects that would otherwise be completed by taking up queue positions, increasing interconnection costs and creating uncertainty.

A total of 6,022 projects have been classified as new generation and 1,532 projects have been classified as upgrades. Natural gas, wind, solar and renewable hybrid projects (including solar + storage, solar + wind and wind + storage) have accounted for 5,905 projects (78.2 percent) of all 7,554 generation queue projects to enter the queue since January 1, 1997.

Table 12-29 Status of all generation queue projects: January 1, 1997 through June 30, 2022

Project Status	Project Classification	Number of Projects																				Total	
		Battery	CC	CT - Natural Gas	CT - Oil	CT - Other	Fuel Cell	Hydro - Pumped Storage	Hydro - Run of River	Nuclear	RICE - Natural Gas	RICE - Oil	RICE - Other	Solar	Solar + Storage	Solar + Wind	Steam - Coal	Steam - Natural Gas	Steam - Oil	Steam - Other	Wind + Storage		
In Service	New Generation	24	64	49	10	25	3	0	10	2	10	0	55	195	1	0	8	5	0	4	98	0	563
	Upgrade	7	108	120	15	5	0	3	19	42	9	2	16	41	0	0	56	10	0	8	13	0	474
Under Construction	New Generation	2	3	2	0	0	0	0	0	0	0	0	0	38	2	0	0	1	0	0	1	0	49
	Upgrade	0	8	12	8	0	1	0	0	1	0	0	0	12	1	0	1	0	0	0	2	0	46
Suspended	New Generation	4	3	3	0	0	0	0	0	0	0	0	0	48	8	0	0	0	0	0	2	1	69
	Upgrade	0	3	0	0	0	0	0	0	0	0	0	0	6	0	0	0	0	0	0	0	1	10
Withdrawn	New Generation	211	435	29	10	82	26	2	44	9	29	12	16	1,505	92	0	55	1	0	34	463	0	3,055
	Upgrade	55	100	16	13	13	2	0	5	13	0	3	3	79	1	0	15	0	0	2	30	0	350
Active	New Generation	388	7	3	0	6	0	2	5	0	1	0	0	1,425	347	2	0	0	1	99	0	2,286	
	Upgrade	256	18	25	2	2	2	1	2	5	0	0	0	270	41	0	2	2	0	0	23	1	652
Total Projects	New Generation	629	512	86	20	113	29	4	59	11	40	12	71	3,211	450	2	63	7	0	39	663	1	6,022
	Upgrade	318	237	173	38	20	5	4	26	61	9	5	19	408	43	0	74	12	0	10	68	2	1,532

Table 12-30 shows the totals in Table 12-29 by share of classification as new generation or upgrade. Within a unit type the shares of upgrades add to 100 percent and the shares of new generation add to 100 percent. For example, 73.1 percent of all hydro run of river projects classified as upgrades are currently in service in PJM, 19.2 percent of hydro run of river upgrades were withdrawn and 7.7 percent of hydro run of river upgrades are active in the queue.

Table 12-30 Status of all generation queue projects as a percent of total projects by classification: January 1, 1997 through June 30, 2022

Project Status	Project Classification	Percent of Projects																				Total	
		Battery	CC	CT - Natural Gas	CT - Oil	CT - Other	Fuel Cell	Hydro - Pumped Storage	Hydro - Run of River	Nuclear	RICE - Natural Gas	RICE - Oil	RICE - Other	Solar	Solar + Storage	Solar + Wind	Steam - Coal	Steam - Natural Gas	Steam - Oil	Steam - Other	Wind + Storage		
In Service	New Generation	3.8%	12.5%	57.0%	50.0%	22.1%	10.3%	0.0%	16.9%	18.2%	25.0%	0.0%	77.5%	6.1%	0.2%	0.0%	12.7%	71.4%	0.0%	10.3%	14.8%	0.0%	9.3%
	Upgrade	2.2%	45.6%	69.4%	39.5%	25.0%	0.0%	75.0%	73.1%	68.9%	100.0%	40.0%	84.2%	10.0%	0.0%	0.0%	75.7%	83.3%	0.0%	80.0%	19.1%	0.0%	30.9%
Under Construction	New Generation	0.3%	0.6%	2.3%	0.0%	0.0%	0.0%	0.0%	0.0%	0.0%	0.0%	0.0%	1.2%	0.4%	0.0%	0.0%	14.3%	0.0%	0.0%	0.2%	0.0%	0.8%	
	Upgrade	0.0%	3.4%	6.9%	21.1%	0.0%	20.0%	0.0%	0.0%	1.6%	0.0%	0.0%	0.0%	2.9%	2.3%	0.0%	1.4%	0.0%	0.0%	2.9%	0.0%	3.0%	
Suspended	New Generation	0.6%	0.6%	3.5%	0.0%	0.0%	0.0%	0.0%	0.0%	0.0%	0.0%	0.0%	1.5%	1.8%	0.0%	0.0%	0.0%	0.0%	0.0%	0.3%	100.0%	1.1%	
	Upgrade	0.0%	1.3%	0.0%	0.0%	0.0%	0.0%	0.0%	0.0%	0.0%	0.0%	0.0%	0.0%	1.5%	0.0%	0.0%	0.0%	0.0%	0.0%	0.0%	0.0%	0.7%	
Withdrawn	New Generation	33.5%	85.0%	33.7%	50.0%	72.6%	89.7%	50.0%	74.6%	81.8%	72.5%	100.0%	22.5%	46.9%	20.4%	0.0%	87.3%	14.3%	0.0%	87.2%	69.8%	0.0%	50.7%
	Upgrade	17.3%	42.2%	9.2%	34.2%	65.0%	40.0%	0.0%	19.2%	21.3%	0.0%	60.0%	15.8%	19.4%	2.3%	0.0%	20.3%	0.0%	0.0%	20.0%	44.1%	0.0%	22.8%
Active	New Generation	61.7%	1.4%	3.5%	0.0%	5.3%	0.0%	50.0%	8.5%	0.0%	2.5%	0.0%	0.0%	44.4%	77.1%	100.0%	0.0%	0.0%	2.6%	14.9%	0.0%	38.0%	
	Upgrade	80.5%	7.6%	14.5%	5.3%	10.0%	40.0%	25.0%	7.7%	8.2%	0.0%	0.0%	0.0%	66.2%	95.3%	0.0%	2.7%	16.7%	0.0%	0.0%	33.8%	50.0%	42.6%

Table 12-31 shows the total MW of projects in the PJM generation queue by unit type and project classification. For example, the 463 new generation wind projects that have been withdrawn from the queue as of June 30, 2022, (as shown in Table 12-29) constitute 85,102.1 MW. The 435 new generation combined cycle projects that have been withdrawn in the same time period constitute 218,766.7 MW.

**Table 12-31 Status of all generation (MW) in the generation queue: January 1, 1997 through June 30, 2022**

Project Status	Project Classification	Project MW																				Total	
		Battery	CC	CT -			Fuel Cell	Hydro - Pumped Storage	Hydro - Run of River	Nuclear	RICE -			Solar Storage	Solar + Wind	Steam - Coal	Steam -			Wind + Storage			
				Natural Gas	Oil	Other					Natural Gas	RICE - Oil	RICE - Other				Natural Gas	Steam - Oil	Steam - Other	Wind			
In Service	New Generation	224.9	36,447.9	6,532.8	676.5	151.3	1.9	0.0	371.5	1,639.0	156.4	0.0	440.1	3,855.8	1.1	0.0	1,343.0	723.0	0.0	60.9	10,661.6	0.0	63,287.7
	Upgrade	44.4	7,416.5	2,889.0	127.8	12.3	0.0	390.0	387.6	2,310.8	17.3	27.3	50.7	294.4	0.0	0.0	976.5	225.5	0.0	667.8	238.7	0.0	16,076.6
Under Construction	New Generation	14.0	3,244.0	208.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	2,492.9	2.6	0.0	0.0	5.0	0.0	0.0	200.0	0.0	6,166.5
	Upgrade	0.0	1,113.7	319.0	13.0	0.0	3.0	0.0	0.0	44.0	0.0	0.0	0.0	211.8	3.2	0.0	36.0	0.0	0.0	0.0	0.0	0.0	1,743.7
Suspended	New Generation	29.0	2,580.0	1,368.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	2,263.9	38.9	0.0	0.0	0.0	0.0	0.0	367.6	90.0	6,737.3
	Upgrade	0.0	120.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	84.5	0.0	0.0	0.0	0.0	0.0	0.0	0.0	16.3	220.8
Withdrawn	New Generation	6,702.2	218,766.7	4,426.3	1,735.0	1,244.2	5.5	500.0	2,066.5	8,161.0	481.2	63.9	88.6	48,262.1	8,754.8	0.0	33,511.6	27.0	0.0	1,050.9	85,102.1	0.0	420,949.5
	Upgrade	1,354.6	12,474.0	984.5	589.0	72.5	0.9	0.0	105.1	966.0	0.0	19.6	10.0	1,845.5	3.7	0.0	885.0	0.0	0.0	37.1	1,613.4	0.0	20,960.9
Active	New Generation	39,618.3	6,551.0	1,838.0	0.0	396.6	0.0	700.0	58.6	0.0	14.4	0.0	0.0	112,096.3	35,101.6	209.0	0.0	0.0	20.0	39,017.6	0.0	235,621.3	
	Upgrade	9,915.2	1,698.7	1,415.8	4.0	0.0	5.0	30.0	54.2	145.5	0.0	0.0	0.0	10,984.4	1,508.3	0.0	29.0	6.0	0.0	0.0	4,373.0	0.0	30,169.2
Total Projects	New Generation	46,598.4	267,589.6	14,373.1	2,411.5	1,792.2	7.4	1,200.0	2,496.5	9,800.0	652.0	63.9	528.7	168,971.0	43,898.9	209.0	34,854.6	755.0	0.0	1,131.8	135,348.8	90.0	732,762.4
	Upgrade	11,314.2	22,822.9	5,608.3	733.8	84.8	8.9	420.0	546.9	3,466.3	17.3	46.9	60.7	13,420.6	1,515.2	0.0	1,926.5	231.5	0.0	704.9	6,225.2	16.3	69,171.2

Table 12-32 shows the MW totals in Table 12-31 by share by classification as new generation or upgrade. Within a unit type the shares of upgrades add to 100 percent and the shares of new generation add to 100 percent. For example, 62.9 percent of wind project MW classified as new generation have been withdrawn from the queue between January 1, 1997, and June 30, 2022.

**Table 12-32 Status of all generation queue projects as percent of total MW in project classification: January 1, 1997 through June 30, 2022**

Project Status	Project Classification	Percent of Total Projects by Classification																				Total	
		Battery	CC	CT -			Fuel Cell	Hydro - Pumped Storage	Hydro - Run of River	Nuclear	RICE -			Solar Storage	Solar + Wind	Steam - Coal	Steam -			Wind + Storage			
				Natural Gas	Oil	Other					Natural Gas	RICE - Oil	RICE - Other				Natural Gas	Steam - Oil	Steam - Other	Wind			
In Service	New Generation	0.5%	13.6%	45.5%	28.1%	8.4%	26.2%	0.0%	14.9%	16.7%	24.0%	0.0%	83.2%	2.3%	0.0%	0.0%	3.9%	95.8%	0.0%	5.4%	7.9%	0.0%	8.6%
	Upgrade	0.4%	32.5%	51.5%	17.4%	14.5%	0.0%	92.9%	70.9%	66.7%	100.0%	58.2%	83.5%	2.2%	0.0%	0.0%	50.7%	97.4%	0.0%	94.7%	3.8%	0.0%	23.2%
Under Construction	New Generation	0.0%	1.2%	1.4%	0.0%	0.0%	0.0%	0.0%	0.0%	0.0%	0.0%	0.0%	0.0%	1.5%	0.0%	0.0%	0.0%	0.7%	0.0%	0.0%	0.1%	0.0%	0.8%
	Upgrade	0.0%	4.9%	5.7%	1.8%	0.0%	33.5%	0.0%	0.0%	1.3%	0.0%	0.0%	0.0%	1.6%	0.2%	0.0%	1.9%	0.0%	0.0%	0.0%	0.0%	0.0%	2.5%
Suspended	New Generation	0.1%	1.0%	9.5%	0.0%	0.0%	0.0%	0.0%	0.0%	0.0%	0.0%	0.0%	0.0%	1.3%	0.1%	0.0%	0.0%	0.0%	0.0%	0.0%	0.3%	100.0%	0.9%
	Upgrade	0.0%	0.5%	0.0%	0.0%	0.0%	0.0%	0.0%	0.0%	0.0%	0.0%	0.0%	0.0%	0.6%	0.0%	0.0%	0.0%	0.0%	0.0%	0.0%	0.0%	100.0%	0.3%
Withdrawn	New Generation	14.4%	81.8%	30.8%	71.9%	69.4%	73.8%	41.7%	82.8%	83.3%	73.8%	100.0%	16.8%	28.6%	19.9%	0.0%	96.1%	3.6%	0.0%	92.9%	62.9%	0.0%	57.4%
	Upgrade	12.0%	54.7%	17.6%	80.3%	85.5%	10.6%	0.0%	19.2%	27.9%	0.0%	41.8%	16.5%	13.8%	0.2%	0.0%	45.9%	0.0%	0.0%	5.3%	25.9%	0.0%	30.3%
Active	New Generation	85.0%	2.4%	12.8%	0.0%	22.1%	0.0%	58.3%	2.3%	0.0%	2.2%	0.0%	0.0%	66.3%	80.0%	100.0%	0.0%	0.0%	1.8%	28.8%	0.0%	32.2%	
	Upgrade	87.6%	7.4%	25.2%	0.5%	0.0%	55.9%	7.1%	9.9%	4.2%	0.0%	0.0%	0.0%	81.8%	99.5%	0.0%	1.5%	2.6%	0.0%	0.0%	70.2%	0.0%	43.6%

Table 12-33 shows the project MW that entered the PJM generation queue by unit type and year of entry. Since 2016, 71.1 percent of all new projects entering the generation queue have been combined cycle (10.5 percent), wind (16.9 percent) or solar projects (43.8 percent). Prior to 2015, no renewable hybrid units (solar + storage, solar + wind and wind + storage) entered the queue. In the time period from January 1, 2015 through June 30, 2022, 45,729.4 MW of renewable hybrid units have entered the queue.

Table 12-33 Queue project MW by unit type and queue entry year: January 1, 1997 through June 30, 2022

Year	Battery	CC	CT - Natural Gas	CT - Oil	CT - Other	Fuel Cell	Hydro - Pumped Storage	Hydro - Run of River	Nuclear	RICE - Natural Gas	RICE - Oil	RICE - Other	Solar	Solar + Storage	Solar + Wind	Steam - Coal	Steam - Natural Gas	Steam - Oil	Steam - Other	Wind	Wind + Storage	Total
1997	0.0	4,148.0	321.0	315.0	0.0	0.0	0.0	0.0	50.0	0.0	0.0	0.0	0.0	0.0	0.0	6.0	0.0	0.0	0.0	0.0	0.0	4,840.0
1998	0.0	7,006.0	1,775.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	8,781.0
1999	0.0	29,412.7	2,061.1	0.0	10.0	0.0	0.0	196.0	45.0	0.0	0.0	0.0	0.0	0.0	0.0	47.0	0.0	0.0	525.0	115.4	0.0	32,412.2
2000	0.0	21,144.8	493.6	31.5	8.8	0.0	0.0	0.0	95.0	0.0	0.0	1.2	0.0	0.0	0.0	37.0	2.5	0.0	0.0	95.6	0.0	21,909.9
2001	0.0	25,411.7	264.0	0.0	0.0	0.0	0.0	107.0	90.0	0.0	0.0	15.6	0.0	0.0	0.0	1,244.6	10.0	0.0	0.0	234.9	0.0	27,377.8
2002	0.0	4,154.0	11.7	0.0	70.5	0.0	0.0	293.0	236.0	8.0	23.3	4.5	0.0	0.0	0.0	1,895.0	0.0	0.0	0.0	790.9	0.0	7,486.9
2003	0.0	2,361.4	10.0	8.0	0.8	0.0	0.0	2.0	0.0	29.0	0.0	27.5	0.0	0.0	0.0	522.0	0.0	0.0	165.0	997.0	0.0	4,122.7
2004	0.0	3,610.0	43.3	20.0	49.1	0.0	0.0	0.0	1,911.0	0.0	35.5	17.5	0.0	0.0	0.0	1,187.0	0.0	0.0	0.0	1,614.7	0.0	8,488.1
2005	0.0	5,824.6	961.0	281.0	51.4	0.0	340.0	174.2	242.0	21.5	0.0	65.1	0.0	0.0	0.0	6,360.0	0.0	0.0	24.0	6,020.0	0.0	20,364.9
2006	0.0	4,188.1	454.3	607.5	73.1	0.0	0.0	159.0	6,894.0	0.0	0.0	93.0	0.0	0.0	0.0	9,586.0	0.0	0.0	258.5	7,482.7	0.0	29,796.2
2007	0.0	13,944.6	941.2	215.9	149.5	0.0	16.0	161.6	368.0	0.0	0.0	56.5	3.3	0.0	0.0	9,078.0	190.0	0.0	50.5	18,525.6	0.0	43,700.6
2008	121.0	26,001.0	129.7	1,113.0	488.8	0.0	0.0	1,254.5	105.0	6.0	0.0	32.0	66.3	0.0	0.0	1,198.0	0.0	0.0	192.3	11,016.1	0.0	41,723.7
2009	34.0	5,548.4	14.0	66.0	214.2	0.0	0.0	133.9	1,933.8	4.5	16.0	15.2	636.5	0.0	0.0	1,273.0	5.5	0.0	148.0	6,672.6	0.0	16,715.6
2010	72.4	9,185.4	176.0	7.9	117.3	0.0	0.0	132.6	426.0	0.0	2.4	57.8	3,672.6	0.0	0.0	64.0	0.0	0.0	173.5	9,803.4	0.0	23,891.3
2011	24.1	19,744.0	29.5	0.0	174.6	0.0	0.0	30.0	182.0	0.0	14.0	75.3	2,014.0	0.0	0.0	357.0	0.0	0.0	49.0	5,576.4	0.0	28,269.9
2012	142.6	18,014.8	282.1	42.5	48.4	0.0	0.0	11.8	369.0	37.2	0.0	4.0	284.6	0.0	0.0	1,837.0	0.0	0.0	143.1	1,529.8	0.0	22,746.8
2013	217.4	10,493.1	1,201.8	5.0	11.2	0.0	0.0	89.4	102.0	59.7	0.0	1.6	231.7	0.0	0.0	158.0	40.0	0.0	44.7	1,407.9	0.0	14,063.4
2014	246.9	11,704.5	1,532.5	401.0	7.7	0.0	0.0	60.5	0.0	48.0	0.0	17.7	1,590.0	0.0	0.0	1,730.5	27.0	0.0	43.1	1,691.3	0.0	19,100.6
2015	546.9	27,540.8	1,324.5	0.0	0.9	2.3	34.0	0.0	0.0	320.4	13.0	31.4	2,920.7	2.0	0.0	47.0	606.5	0.0	0.0	2,160.6	0.0	35,550.9
2016	111.1	18,802.5	1,392.0	0.0	0.0	3.4	0.0	12.5	50.3	23.5	0.0	38.9	11,605.5	85.6	0.0	80.0	77.0	0.0	0.0	3,448.7	16.3	35,747.2
2017	24.6	5,477.6	691.0	0.0	4.1	2.7	0.0	20.5	39.1	97.1	0.0	33.8	13,652.8	424.9	0.0	14.0	17.0	0.0	0.0	5,137.0	90.0	25,726.3
2018	1,463.7	11,080.1	2,647.4	14.0	0.0	0.0	700.0	2.4	28.1	0.0	0.0	0.8	19,924.0	4,423.9	0.0	49.0	0.0	0.0	0.0	17,707.9	0.0	58,041.3
2019	5,594.8	3,332.5	1,587.1	13.0	0.0	3.0	500.0	99.0	0.0	0.0	0.0	0.0	27,562.5	9,557.9	0.0	11.0	0.0	0.0	0.0	11,585.4	0.0	59,846.1
2020	11,313.9	50.0	846.6	4.0	0.0	0.0	0.0	80.2	100.0	0.0	0.0	0.0	37,451.2	10,395.6	199.0	0.0	11.0	0.0	0.0	6,915.9	0.0	67,367.3
2021	25,907.1	2,129.0	771.0	0.0	396.6	5.0	30.0	23.5	0.0	14.4	0.0	0.0	49,118.7	14,871.2	10.0	0.0	0.0	0.0	20.0	11,160.0	0.0	104,456.5
2022	12,082.0	103.0	20.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	6.6	0.0	11,657.2	5,653.1	0.0	0.0	0.0	0.0	0.0	9,884.3	0.0	39,406.2
Total	57,902.6	290,412.5	19,981.4	3,145.3	1,876.9	16.3	1,620.0	3,043.4	13,266.3	669.3	110.8	589.4	182,391.6	45,414.1	209.0	36,781.1	986.5	0.0	1,836.7	141,574.0	106.3	801,933.6

### Combined Cycle Project Analysis

Table 12-34 shows the status of all combined cycle projects by number of projects that entered PJM generation queues from January 1, 1997, through June 30, 2022, by zone. Of the 42 combined cycle projects classified as new generation or upgrade currently active, suspended or under construction in the PJM generation queue, 11 projects (26.2 percent) are located in the AEP Zone.

**Table 12-34 Status of all combined cycle queue projects by zone (number of projects): January 1, 1997 through June 30, 2022**

Project Status	Project Classification	Number of Projects																					
		ACEC	AEP	APS	ATSI	BGE	COMED	DAY	DUKE	DUQ	DOM	DPL	EKPC	JCPLC	MEC	OVEC	PECO	PE	PEPCO	PPL	PSEG	REC	Total
In Service	New Generation	1	5	3	4	2	2	0	2	0	7	2	0	7	4	0	5	2	4	8	6	0	64
	Upgrade	3	12	9	5	0	5	0	0	0	16	5	0	6	3	0	13	4	4	9	14	0	108
Under Construction	New Generation	0	2	0	0	0	1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	3
	Upgrade	0	4	1	0	0	0	0	0	0	0	0	0	0	1	0	0	0	0	1	1	0	8
Suspended	New Generation	0	1	0	1	0	1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	3
	Upgrade	0	1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	2	0	0	0	0	3
Withdrawn	New Generation	23	19	45	13	8	16	1	1	2	19	16	3	26	25	0	43	41	34	42	56	2	435
	Upgrade	8	7	9	4	0	4	0	1	0	11	5	0	8	7	0	3	5	5	8	15	0	100
Active	New Generation	0	2	4	1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	7
	Upgrade	0	1	4	1	0	2	0	0	0	3	1	0	0	0	0	1	0	2	2	1	0	18
Total Projects	New Generation	24	29	52	19	10	20	1	3	2	26	18	3	33	29	0	48	43	38	50	62	2	512
	Upgrade	11	25	23	10	0	11	0	1	0	30	11	0	14	11	0	17	11	11	20	31	0	237

Table 12-35 shows the status of all combined cycle projects by MW that entered PJM generation queues from January 1, 1997, through June 30, 2022, by zone. Of the 15,307.4 MW of combined cycle projects classified as new generation or upgrade currently active, suspended or under construction in the PJM generation queue, 5,530.0 MW (36.1 percent) are located in the AEP Zone.

**Table 12-35 Status of all combined cycle queue projects by zone (MW): January 1, 1997 through June 30, 2022**

Project Status	Project Classification	Project MW																					
		ACEC	AEP	APS	ATSI	BGE	COMED	DAY	DUKE	DUQ	DOM	DPL	EKPC	JCPLC	MEC	OVEC	PECO	PE	PEPCO	PPL	PSEG	REC	Total
In Service	New Generation	650.0	3,517.0	1,970.0	3,751.0	140.0	1,800.9	0.0	533.0	0.0	5,828.6	319.2	0.0	1,665.8	2,557.0	0.0	2,665.0	1,900.0	1,560.0	5,142.0	2,448.5	0.0	36,447.9
	Upgrade	229.0	384.0	939.7	344.0	0.0	633.6	0.0	0.0	0.0	978.0	102.0	0.0	110.0	83.9	0.0	1,075.5	142.3	228.6	1,320.0	845.9	0.0	7,416.5
Under Construction	New Generation	0.0	2,094.0	0.0	0.0	0.0	1,150.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	3,244.0
	Upgrade	0.0	916.0	20.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	75.0	0.0	0.0	0.0	0.0	51.6	51.1	0.0	1,113.7
Suspended	New Generation	0.0	1,050.0	0.0	955.0	0.0	575.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	2,580.0
	Upgrade	0.0	35.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	85.0	0.0	0.0	0.0	0.0	120.0
Withdrawn	New Generation	8,542.4	12,509.5	21,832.1	8,641.0	3,122.1	10,817.0	1,150.0	134.5	665.0	13,921.0	5,145.4	991.8	13,562.6	13,001.0	0.0	23,340.0	16,114.0	21,308.2	18,917.7	25,044.6	6.9	218,766.7
	Upgrade	157.0	711.0	874.0	636.0	0.0	1,735.0	0.0	36.0	0.0	780.4	959.0	0.0	413.0	1,742.0	0.0	240.0	1,040.6	229.1	703.0	2,217.9	0.0	12,474.0
Active	New Generation	0.0	1,150.0	4,461.0	940.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	6,551.0
	Upgrade	0.0	285.0	589.0	58.0	0.0	111.7	0.0	0.0	0.0	99.0	451.0	0.0	0.0	0.0	0.0	5.0	0.0	45.0	55.0	0.0	0.0	1,698.7
Total Projects	New Generation	9,192.4	20,320.5	28,263.1	14,287.0	3,262.1	14,342.9	1,150.0	667.5	665.0	19,749.6	5,464.6	991.8	15,228.4	15,558.0	0.0	26,005.0	18,014.0	22,868.2	24,059.7	27,493.1	6.9	267,589.6
	Upgrade	386.0	2,331.0	2,422.7	1,038.0	0.0	2,480.3	0.0	36.0	0.0	1,857.4	1,512.0	0.0	523.0	1,900.9	0.0	1,320.5	1,267.9	502.7	2,129.6	3,114.9	0.0	22,822.9

### Combustion Turbine – Natural Gas Project Analysis

Table 12-36 shows the status of all combustion turbine natural gas projects by number of projects that entered PJM generation queues from January 1, 1997, through June 30, 2022, by zone. Of the 45 combustion turbine natural gas projects classified as new generation or upgrade currently active, suspended or under construction in the PJM generation queue, eight projects (17.8 percent) are located in the COMED Zone.

**Table 12-36 Status of all combustion turbine – natural gas generation queue projects by zone (number of projects): January 1, 1997 through June 30, 2022**

Project Status	Project Classification	Number of Projects																				Total	
		ACEC	AEP	APS	ATSI	BGE	COMED	DAY	DUKE	DUQ	DOM	DPL	EKPC	JCPLC	MEC	OVEC	PECO	PE	PEPCO	PPL	PSEG		REC
In Service	New Generation	5	0	6	0	3	0	0	0	2	3	6	0	2	1	0	2	4	2	4	9	0	49
	Upgrade	4	10	9	2	0	17	6	0	0	28	8	0	5	2	0	4	4	3	4	14	0	120
Under Construction	New Generation	0	0	0	0	0	1	0	0	0	0	0	0	0	0	0	1	0	0	0	0	2	
	Upgrade	0	0	1	2	0	2	0	0	0	0	0	0	0	3	0	0	4	0	0	0	12	
Suspended	New Generation	1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1	0	0	1	3	
	Upgrade	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	
Withdrawn	New Generation	1	6	0	0	2	1	1	0	0	4	0	1	1	0	0	1	5	0	1	5	29	
	Upgrade	2	1	1	1	0	3	2	0	1	3	0	0	0	1	0	0	1	0	0	0	16	
Active	New Generation	0	1	0	0	0	0	0	0	0	2	0	0	0	0	0	0	0	0	0	0	3	
	Upgrade	2	3	1	5	0	5	1	0	1	1	0	0	0	0	0	0	1	5	0	0	25	
Total Projects	New Generation	7	7	6	0	5	2	1	0	2	9	6	1	3	1	0	3	11	2	5	15	86	
	Upgrade	8	14	12	10	0	27	9	0	2	32	8	0	5	6	0	4	10	8	4	14	173	

Table 12-37 shows the status of all combustion turbine natural gas projects by MW that entered PJM generation queues from January 1, 1997, through June 30, 2022, by zone. Of the 5,148.8 MW of combustion turbine natural gas projects classified as new generation or upgrade currently active, suspended or under construction in the PJM generation queue, 1,138.0 MW (22.1 percent) are located in the DOM Zone.

**Table 12-37 Status of all combustion turbine – natural gas queue projects by zone (MW): January 1, 1997 through June 30, 2022**

Project Status	Project Classification	Project MW																				Total	
		ACEC	AEP	APS	ATSI	BGE	COMED	DAY	DUKE	DUQ	DOM	DPL	EKPC	JCPLC	MEC	OVEC	PECO	PE	PEPCO	PPL	PSEG		REC
In Service	New Generation	360.7	0.0	1,176.0	0.0	23.0	0.0	0.0	0.0	219.4	1,081.0	1,140.0	0.0	520.0	10.0	0.0	559.0	361.9	5.0	150.9	925.9	0.0	6,532.8
	Upgrade	43.7	227.0	199.7	40.0	0.0	478.0	83.5	0.0	0.0	925.7	86.0	0.0	200.0	36.1	0.0	42.0	28.0	32.0	252.3	215.0	0.0	2,889.0
Under Construction	New Generation	0.0	0.0	0.0	0.0	0.0	190.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	18.0	0.0	0.0	0.0	0.0	208.0
	Upgrade	0.0	0.0	70.0	5.0	0.0	220.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	11.5	0.0	0.0	12.5	0.0	0.0	0.0	0.0	319.0
Suspended	New Generation	230.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	463.0	0.0	0.0	675.0	0.0	1,368.0
	Upgrade	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Withdrawn	New Generation	7.5	1,519.0	0.0	0.0	153.6	10.0	104.0	0.0	0.0	1,069.8	0.0	73.0	2.1	0.0	0.0	0.5	326.8	0.0	19.9	1,140.1	0.0	4,426.3
	Upgrade	165.5	6.0	4.0	25.0	0.0	373.0	104.0	0.0	15.0	57.0	0.0	0.0	0.0	0.0	0.0	0.0	235.0	0.0	0.0	0.0	0.0	984.5
Active	New Generation	0.0	700.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1,138.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1,838.0
	Upgrade	0.0	142.1	30.0	518.7	0.0	554.2	20.0	0.0	3.5	0.0	0.0	0.0	0.0	0.0	0.0	0.0	92.0	55.3	0.0	0.0	0.0	1,415.8
Total Projects	New Generation	598.2	2,219.0	1,176.0	0.0	176.6	200.0	104.0	0.0	219.4	3,288.8	1,140.0	73.0	522.1	10.0	0.0	559.5	1,169.7	5.0	170.8	2,741.0	0.0	14,373.1
	Upgrade	209.2	375.1	303.7	588.7	0.0	1,625.2	207.5	0.0	18.5	982.7	86.0	0.0	200.0	47.6	0.0	42.0	367.5	87.3	252.3	215.0	0.0	5,608.3

## Wind Project Analysis

Table 12-38 shows the status of all wind generation projects, by number of projects that entered PJM generation queues from January 1, 1997, through June 30, 2021, by zone. Of the 127 wind projects classified as new generation or upgrade currently active, suspended or under construction in the PJM generation queue, 46 projects (36.2 percent) are located in the COMED Zone.

**Table 12-38 Status of all wind generation queue projects by zone (number of projects): January 1, 1997 through June 30, 2022**

Project Status	Project Classification	Number of Projects																					
		ACEC	AEP	APS	ATSI	BGE	COMED	DAY	DUKE	DUQ	DOM	DPL	EKPC	JCPLC	MEC	OVEC	PECO	PE	PEPCO	PPL	PSEG	REC	Total
In Service	New Generation	1	19	18	0	0	26	0	0	0	3	0	0	0	0	0	0	23	0	8	0	0	98
	Upgrade	0	0	3	0	0	5	0	0	0	0	0	0	0	0	0	0	5	0	0	0	0	13
Under Construction	New Generation	0	0	0	0	0	1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1
	Upgrade	0	0	0	0	0	2	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	2
Suspended	New Generation	0	0	0	0	0	0	0	0	0	1	0	0	0	0	0	0	0	0	0	1	0	2
	Upgrade	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
Withdrawn	New Generation	18	116	46	9	0	109	14	0	0	21	11	1	7	0	0	0	63	0	47	1	0	463
	Upgrade	2	2	7	0	0	8	0	0	0	3	0	0	0	0	0	0	6	0	2	0	0	30
Active	New Generation	6	18	7	2	0	35	0	0	0	7	11	0	7	0	0	0	3	0	2	1	0	99
	Upgrade	0	1	1	0	0	8	0	0	0	0	5	0	5	0	0	0	3	0	0	0	0	23
Total Projects	New Generation	25	153	71	11	0	171	14	0	0	32	22	1	14	0	0	0	89	0	58	2	0	663
	Upgrade	2	3	11	0	0	23	0	0	0	3	5	0	5	0	0	0	14	0	2	0	0	68

Table 12-39 shows the status of all wind projects by MW that entered PJM generation queues from January 1, 1997, through June 30, 2022, by zone. Of the 43,958.2 MW of wind projects classified as new generation or upgrade currently active, suspended or under construction in the PJM generation queue, 10,372.5 MW (23.6 percent) are located in the JCPLC Zone.

**Table 12-39 Status of all wind generation queue projects by zone (MW): January 1, 1997 through June 30, 2022**

Project Status	Project Classification	Project MW																					
		ACEC	AEP	APS	ATSI	BGE	COMED	DAY	DUKE	DUQ	DOM	DPL	EKPC	JCPLC	MEC	OVEC	PECO	PE	PEPCO	PPL	PSEG	REC	Total
In Service	New Generation	7.5	3,544.6	1,424.6	0.0	0.0	4,088.9	0.0	0.0	0.0	322.5	0.0	0.0	0.0	0.0	0.0	0.0	1,047.0	0.0	226.5	0.0	0.0	10,661.6
	Upgrade	0.0	0.0	5.0	0.0	0.0	213.2	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	20.5	0.0	0.0	0.0	0.0	238.7
Under Construction	New Generation	0.0	0.0	0.0	0.0	0.0	200.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	200.0
	Upgrade	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Suspended	New Generation	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	300.3	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	67.3	0.0	0.0	367.6
	Upgrade	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Withdrawn	New Generation	4,643.6	23,743.4	3,552.2	1,313.6	0.0	25,514.8	2,080.0	0.0	0.0	4,988.4	2,968.8	150.3	7,397.0	0.0	0.0	0.0	5,257.0	0.0	3,473.1	20.0	0.0	85,102.1
	Upgrade	5.0	370.0	119.4	0.0	0.0	755.7	0.0	0.0	0.0	114.0	0.0	0.0	0.0	0.0	0.0	0.0	243.4	0.0	6.0	0.0	0.0	1,613.4
Active	New Generation	3,441.6	3,506.3	821.5	798.1	0.0	8,799.8	0.0	0.0	0.0	5,118.5	6,686.2	0.0	7,959.2	0.0	0.0	0.0	236.9	0.0	349.6	1,300.0	0.0	39,017.6
	Upgrade	0.0	16.6	207.6	0.0	0.0	483.4	0.0	0.0	0.0	0.0	985.3	0.0	2,413.3	0.0	0.0	0.0	266.9	0.0	0.0	0.0	0.0	4,373.0
Total Projects	New Generation	8,092.7	30,794.3	5,798.3	2,111.7	0.0	38,603.5	2,080.0	0.0	0.0	10,729.7	9,655.0	150.3	15,356.2	0.0	0.0	0.0	6,540.8	0.0	4,116.5	1,320.0	0.0	135,348.8
	Upgrade	5.0	386.6	332.0	0.0	0.0	1,452.2	0.0	0.0	0.0	114.0	985.3	0.0	2,413.3	0.0	0.0	0.0	530.7	0.0	6.0	0.0	0.0	6,225.2



### Solar Project Analysis

Table 12-40 shows the status of all solar generation projects by number of projects that entered PJM generation queues from January 1, 1997, through June 30, 2022, by zone. Of the 1,799 solar projects classified as new generation or upgrade currently active, suspended or under construction in the PJM generation queue, 401 projects (22.3 percent) are located in the DOM Zone.

**Table 12-40 Status of all solar generation queue projects by zone (number of projects): January 1, 1997 through June 30, 2022**

Project Status	Project Classification	Number of Projects																				Total	
		ACEC	AEP	APS	ATSI	BGE	COMED	DAY	DUKE	DUQ	DOM	DPL	EKPC	JCPLC	MEC	OVEC	PECO	PE	PEPCO	PPL	PSEG		REC
In Service	New Generation	10	9	9	0	1	1	1	1	0	48	11	0	53	0	0	1	1	1	2	46	0	195
	Upgrade	1	2	3	0	0	0	0	2	0	8	10	0	11	0	0	0	1	0	3	0	0	41
Under Construction	New Generation	1	3	2	0	0	0	1	0	1	17	7	0	0	3	0	0	0	0	3	0	38	
	Upgrade	0	3	0	0	0	0	0	0	0	5	0	0	0	0	0	0	0	0	4	0	12	
Suspended	New Generation	0	2	13	3	0	2	1	1	0	12	1	2	0	4	0	0	4	0	3	0	48	
	Upgrade	0	0	1	0	0	0	0	1	0	0	0	1	2	1	0	0	0	0	0	0	6	
Withdrawn	New Generation	191	134	101	35	15	46	26	16	2	253	154	16	196	27	1	10	78	23	60	121	0	1,505
	Upgrade	4	6	4	5	0	6	1	0	0	22	3	0	9	3	0	0	10	3	0	3	0	79
Active	New Generation	23	284	124	85	5	74	32	9	5	315	60	62	31	39	2	10	171	12	78	4	0	1,425
	Upgrade	3	70	23	22	0	17	12	1	1	52	11	5	1	9	2	0	19	0	22	0	0	270
Total Projects	New Generation	225	432	249	123	21	123	61	27	8	645	233	80	280	73	3	21	254	36	143	174	0	3,211
	Upgrade	8	81	31	27	0	23	13	4	1	87	24	6	23	13	2	0	30	3	25	7	0	408

Table 12-41 shows the status of all solar projects by MW that entered PJM generation queues from January 1, 1997, through June 30, 2022, by zone. Of the 128,133.8 MW of solar projects classified as new generation or upgrade currently active, suspended or under construction in the PJM generation queue, 42,927.9 MW (33.5 percent) are located in the AEP Zone.

**Table 12-41 Status of all solar generation queue projects by zone (MW): January 1, 1997 through June 30, 2022**

Project Status	Project Classification	Project MW																				Total	
		ACEC	AEP	APS	ATSI	BGE	COMED	DAY	DUKE	DUQ	DOM	DPL	EKPC	JCPLC	MEC	OVEC	PECO	PE	PEPCO	PPL	PSEG		REC
In Service	New Generation	65.0	314.7	120.5	0.0	1.1	9.0	2.5	125.0	0.0	2,413.6	130.4	0.0	397.9	0.0	0.0	3.3	13.5	2.5	15.0	241.9	0.0	3,855.8
	Upgrade	0.0	150.0	0.0	0.0	0.0	0.0	0.0	75.0	0.0	45.1	0.0	0.0	14.3	0.0	0.0	0.0	0.0	0.0	10.0	0.0	0.0	294.4
Under Construction	New Generation	2.6	377.0	30.0	0.0	0.0	0.0	400.0	0.0	17.1	1,337.2	251.6	0.0	0.0	60.0	0.0	0.0	0.0	0.0	0.0	17.5	0.0	2,492.9
	Upgrade	0.0	167.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	41.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	3.8	0.0	211.8
Suspended	New Generation	0.0	97.9	179.3	245.0	0.0	32.5	178.0	70.0	0.0	952.1	202.0	175.0	0.0	12.0	0.0	0.0	60.2	0.0	60.0	0.0	0.0	2,263.9
	Upgrade	0.0	0.0	15.9	0.0	0.0	0.0	0.0	10.0	0.0	0.0	0.0	20.0	18.6	20.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	84.5
Withdrawn	New Generation	2,118.5	9,360.4	2,790.7	1,883.7	121.6	3,386.2	2,274.6	689.4	33.0	14,552.4	2,623.6	998.9	1,617.4	971.7	78.0	98.2	2,630.6	438.0	1,025.1	570.3	0.0	48,262.1
	Upgrade	172.5	126.0	32.9	213.0	0.0	110.0	20.0	0.0	0.0	1,068.8	5.0	0.0	23.8	15.0	0.0	0.0	53.7	3.6	0.0	1.3	0.0	1,845.5
Active	New Generation	619.4	38,236.0	5,695.6	5,690.9	154.9	11,945.4	2,555.0	578.9	63.5	29,165.9	1,932.1	5,577.2	444.9	636.4	340.0	125.6	5,870.4	240.1	2,186.2	37.9	0.0	112,096.3
	Upgrade	48.0	4,050.0	554.4	916.7	0.0	1,693.0	225.5	20.0	8.3	2,101.4	74.0	233.8	8.8	173.0	90.0	0.0	465.5	0.0	322.1	0.0	0.0	10,984.4
Total Projects	New Generation	2,805.5	48,386.0	8,815.9	7,819.6	277.6	15,373.1	5,410.0	1,463.3	113.6	48,421.1	5,139.6	6,751.1	2,460.2	1,680.1	418.0	227.1	8,574.6	680.7	3,286.3	867.6	0.0	168,971.0
	Upgrade	220.5	4,493.0	603.1	1,129.7	0.0	1,803.0	245.5	105.0	8.3	3,256.3	78.9	253.8	65.5	208.0	90.0	0.0	519.2	3.6	332.1	5.1	0.0	13,420.6

## Battery Project Analysis

Table 12-42 shows the status of all battery generation projects by number of projects that entered PJM generation queues from January 1, 1997, through June 30, 2022, by zone. Of the 650 battery projects currently active, suspended or under construction in the PJM generation queue, 222 projects (34.2 percent) are located in the DOM Zone.

**Table 12-42 Status of all battery generation queue projects by zone (number of projects): January 1, 1997 through June 30, 2022**

Project Status	Project Classification	Number of Projects																				Total		
		ACEC	AEP	APS	ATSI	BGE	COMED	DAY	DUKE	DUQ	DOM	DPL	EKPC	JCPLC	MEC	OVEC	PECO	PE	PEPCO	PPL	PSEG		REC	
In Service	New Generation	0	2	3	0	0	8	1	4	0	0	0	0	2	0	0	1	0	0	0	1	2	0	24
	Upgrade	0	1	0	0	0	0	1	1	0	0	0	0	2	0	0	0	2	0	0	0	0	0	7
Under Construction	New Generation	0	0	0	0	0	0	0	0	0	0	0	0	2	0	0	0	0	0	0	0	0	2	
	Upgrade	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	
Suspended	New Generation	0	0	0	0	0	0	0	0	0	0	0	0	1	0	0	0	0	0	0	1	2	4	
	Upgrade	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	
Withdrawn	New Generation	7	33	4	7	25	24	3	3	1	28	17	1	35	4	0	4	4	1	6	4	0	211	
	Upgrade	4	8	5	2	0	5	2	1	0	9	2	0	6	2	0	3	5	0	1	0	0	55	
Active	New Generation	15	74	14	13	8	36	1	2	4	141	16	5	19	6	0	0	8	6	8	12	0	388	
	Upgrade	6	47	19	11	1	41	5	1	0	81	7	3	5	5	0	0	19	0	4	1	0	256	
Total Projects	New Generation	22	109	21	20	33	68	5	9	5	169	33	6	59	10	0	5	12	7	16	20	0	629	
	Upgrade	10	56	24	13	1	46	8	3	0	90	9	3	13	7	0	3	26	0	5	1	0	318	

Table 12-43 shows the status of all battery projects by MW that entered PJM generation queues from January 1, 1997, through June 30, 2022, by zone. Of the 49,576.5 MW of battery generation currently active, suspended or under construction in the PJM generation queue, 15,028.2 MW (30.3 percent) are located in the DOM Zone.

**Table 12-43 Status of all battery generation queue projects by zone (MW): January 1, 1997 through June 30, 2022**

Project Status	Project Classification	Project MW																				Total	
		ACEC	AEP	APS	ATSI	BGE	COMED	DAY	DUKE	DUQ	DOM	DPL	EKPC	JCPLC	MEC	OVEC	PECO	PE	PEPCO	PPL	PSEG		REC
In Service	New Generation	0.0	6.0	39.9	0.0	0.0	87.0	12.0	16.0	0.0	0.0	0.0	0.0	40.0	0.0	0.0	1.0	0.0	0.0	20.0	3.0	0.0	224.9
	Upgrade	0.0	4.0	0.0	0.0	0.0	0.0	8.0	4.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	28.4	0.0	0.0	0.0	0.0	44.4
Under Construction	New Generation	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	14.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	14.0
	Upgrade	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Suspended	New Generation	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	2.0	0.0	0.0	0.0	0.0	0.0	20.0	7.0	0.0	29.0
	Upgrade	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Withdrawn	New Generation	161.0	1,419.0	187.0	206.1	260.6	779.0	319.9	75.5	20.0	1,308.4	350.0	20.3	697.1	214.7	0.0	4.3	360.0	20.0	289.8	9.5	0.0	6,702.2
	Upgrade	20.0	302.2	169.0	20.3	0.0	325.0	95.0	20.0	0.0	183.0	14.0	0.0	55.1	30.0	0.0	60.0	41.0	0.0	20.0	0.0	0.0	1,354.6
Active	New Generation	1,773.0	8,741.5	1,379.5	1,810.0	1,083.5	5,064.8	85.0	225.0	205.0	13,119.2	909.0	176.0	873.8	526.2	0.0	0.0	635.8	796.0	455.0	1,760.0	0.0	39,618.3
	Upgrade	0.0	2,294.4	1,565.3	408.0	115.0	2,311.3	255.0	52.2	0.0	1,909.0	155.0	0.0	24.0	429.0	0.0	0.0	362.0	0.0	20.0	15.0	0.0	9,915.2
Total Projects	New Generation	1,934.0	10,166.5	1,606.4	2,016.1	1,344.1	5,930.8	416.9	316.5	225.0	14,427.6	1,259.0	196.3	1,626.9	740.9	0.0	5.3	995.8	816.0	784.8	1,779.5	0.0	46,588.4
	Upgrade	20.0	2,600.6	1,734.3	428.3	115.0	2,636.3	358.0	76.2	0.0	2,092.0	169.0	0.0	79.1	459.0	0.0	60.0	431.4	0.0	40.0	15.0	0.0	11,314.2

### Renewable Hybrid Project Analysis

Table 12-44 shows the status of all renewable hybrid generation projects (solar + storage, solar + wind and wind + storage) by number of projects that entered PJM generation queues from January 1, 1997, through June 30, 2022, by zone.<sup>55</sup> Of the 404 renewable hybrid projects currently active, suspended or under construction in the PJM generation queue, 101 projects (25.0 percent) are located in the AEP Zone.

**Table 12-44 Status of all renewable hybrid generation queue projects by zone (number of projects): January 1, 1997 through June 30, 2022**

Project Status	Project Classification	Number of Projects																						
		ACEC	AEP	APS	ATSI	BGE	COMED	DAY	DUKE	DUQ	DOM	DPL	EKPC	JCPLC	MEC	OVEC	PECO	PE	PEPCO	PPL	PSEG	REC	Total	
In Service	New Generation	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1	0	1
	Upgrade	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
Under Construction	New Generation	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	2	0	2	
	Upgrade	0	1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1	
Suspended	New Generation	0	0	1	0	0	0	0	0	0	0	0	0	0	6	0	0	1	0	1	0	0	9	
	Upgrade	0	0	1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1	
Withdrawn	New Generation	4	10	7	5	0	5	0	0	0	29	2	8	0	1	0	0	4	1	6	10	0	92	
	Upgrade	0	0	0	0	0	0	0	0	0	0	0	0	0	1	0	0	0	0	0	0	0	1	
Active	New Generation	5	92	33	12	0	19	9	2	3	69	4	28	7	6	1	1	19	3	35	1	0	349	
	Upgrade	1	8	4	3	0	2	3	0	0	8	0	4	0	1	0	0	1	0	7	0	0	42	
Total Projects	New Generation	9	102	41	17	0	24	9	2	3	98	6	36	7	13	1	1	24	4	42	14	0	453	
	Upgrade	1	9	5	3	0	2	3	0	0	8	0	4	0	2	0	0	1	0	7	0	0	45	

Table 12-45 shows the status of all renewable hybrid projects by MW that entered PJM generation queues from January 1, 1997, through June 30, 2022, by zone. Of the 36,969.8 MW of renewable hybrid generation currently active, suspended or under construction in the PJM generation queue, 14,919.8 MW (40.4 percent) are located in the AEP Zone.

**Table 12-45 Status of all renewable hybrid generation queue projects by zone (MW): January 1, 1997 through June 30, 2022**

Project Status	Project Classification	Project MW																					
		ACEC	AEP	APS	ATSI	BGE	COMED	DAY	DUKE	DUQ	DOM	DPL	EKPC	JCPLC	MEC	OVEC	PECO	PE	PEPCO	PPL	PSEG	REC	Total
In Service	New Generation	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1.1	0.0	1.1
	Upgrade	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Under Construction	New Generation	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	2.6	0.0	2.6	
	Upgrade	0.0	3.2	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	3.2
Suspended	New Generation	0.0	0.0	20.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	15.9	0.0	0.0	3.0	0.0	90.0	0.0	0.0	128.9
	Upgrade	0.0	0.0	16.3	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	16.3
Withdrawn	New Generation	14.5	3,360.8	565.0	334.9	0.0	629.9	0.0	0.0	0.0	2,279.9	104.5	1,004.0	0.0	20.0	0.0	0.0	184.2	20.0	201.0	36.1	0.0	8,754.8
	Upgrade	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	3.7	0.0	0.0	0.0	0.0	0.0	0.0	0.0	3.7
Active	New Generation	161.0	14,251.6	2,717.3	831.5	0.0	3,067.5	375.9	50.0	107.5	7,179.8	270.0	2,631.3	235.0	146.2	178.5	5.0	1,150.6	1,452.0	480.0	20.0	0.0	35,310.6
	Upgrade	60.0	665.0	0.0	60.1	0.0	20.0	40.0	0.0	0.0	199.0	0.0	165.0	0.0	0.0	0.0	0.0	38.2	0.0	261.0	0.0	0.0	1,508.3
Total Projects	New Generation	175.5	17,612.4	3,302.3	1,166.4	0.0	3,697.4	375.9	50.0	107.5	9,459.7	374.5	3,635.3	235.0	182.1	178.5	5.0	1,337.9	1,472.0	771.0	59.7	0.0	44,197.9
	Upgrade	60.0	668.2	16.3	60.1	0.0	20.0	40.0	0.0	0.0	199.0	0.0	165.0	0.0	3.7	0.0	0.0	38.2	0.0	261.0	0.0	0.0	1,531.5

<sup>55</sup> PJM does not currently have a definition of a hybrid resource.

## Relationship Between Project Developer and Transmission Owner

A transmission owner (TO) is an “entity that owns, leases or otherwise has a possessory interest in facilities used for the transmission of electric energy in interstate commerce under the tariff.”<sup>56</sup> Where the transmission owner is a vertically integrated company that also owns generation, there is a potential conflict of interest when the transmission owner evaluates the interconnection requirements of new generation which is a competitor to the generation or transmission of the parent company and when the transmission owner evaluates the interconnection requirements of new generation which is part of the same company as the transmission owner. There is also a potential conflict of interest when the transmission owner evaluates the interconnection requirements of a nonincumbent transmission developer which is a competitor of the transmission owner. The MMU recommends outsourcing interconnection studies to an independent party to avoid potential conflicts of interest.

Table 12-46 shows the relationship between the project developer and transmission owner for all project MW that have entered the PJM generation queue from January 1, 1997, through June 30, 2022, by transmission owner and unit type. A project where the developer is affiliated with the transmission owner is classified as related. A project where the developer is not affiliated with the transmission owner is classified as unrelated. For example, 36.0 MW of combined cycle generation projects that have entered the PJM generation queue in the DUKE Zone were projects developed by Duke Energy or subsidiaries of Duke Energy, the transmission owner for the DUKE Zone. These project MW are classified as related. There have been 667.5 MW of combined cycle projects that have entered the PJM generation queue in the DUKE Zone by developers not affiliated with Duke Energy. These project MW are classified as unrelated.

Of the 801,933.6 MW that have entered the queue during the time period of January 1, 1997, through June 30, 2022, 71,470.7 MW (8.9 percent) have been submitted by transmission owners building in their own service territory. PSEG is the transmission owner with the highest percentage of affiliates building in their own service territory. Of the 39,776.7 MW that entered the queue in the PSEG Zone during the time period of January 1, 1997, through June 30, 2022, 14,282.3 MW (35.9 percent) were submitted by PSEG or one of their affiliated companies.

<sup>56</sup> See OATT § 1 (Transmission Owner).



### Combined Cycle Project Developer and Transmission Owner Relationships

Table 12-47 shows the relationship between the project developer and transmission owner for all combined cycle project MW that have entered the PJM generation queue from January 1, 1997, through June 30, 2022, by transmission owner and project status. Of the 48,222.1 combined cycle project MW that have achieved in service or under construction status during this time period, 9,374.6 MW (19.4 percent) have been developed by transmission owners building in their own service territory. EKPC is the transmission owner with the highest percentage of affiliates building combined cycle projects in their own service territory. Of the 991.8 MW that entered the queue in the EKPC Zone during the time period of January 1, 1997, through June 30, 2022, 821.8 MW (82.9 percent) have been submitted by EKPC or one of their affiliated companies.

**Table 12-47 Relationship between project developer and transmission owner for all combined cycle project MW in the queue: June 30, 2022**

Parent Company	Transmission Owner	Related to Developer	MW by Project Status						Total	Percent of Total
			Active	In Service	Under Construction	Suspended	Withdrawn			
AEP	AEP	Related	0.0	678.0	0.0	0.0	0.0	678.0	3.0%	
		Unrelated	1,435.0	3,223.0	3,010.0	1,085.0	13,220.5	21,973.5	97.0%	
AES	DAY	Related	0.0	0.0	0.0	0.0	0.0	0.0	0.0%	
		Unrelated	0.0	0.0	0.0	0.0	1,150.0	1,150.0	100.0%	
DUQ	DUQ	Related	0.0	0.0	0.0	0.0	0.0	0.0	0.0%	
		Unrelated	0.0	0.0	0.0	0.0	665.0	665.0	100.0%	
DOM	DOM	Related	75.0	4,762.5	0.0	0.0	7,501.0	12,338.5	57.1%	
		Unrelated	24.0	2,044.1	0.0	0.0	7,200.4	9,268.5	42.9%	
DUKE	DUKE	Related	0.0	0.0	0.0	0.0	36.0	36.0	5.1%	
		Unrelated	0.0	533.0	0.0	0.0	134.5	667.5	94.9%	
EKPC	EKPC	Related	0.0	0.0	0.0	0.0	821.8	821.8	82.9%	
		Unrelated	0.0	0.0	0.0	0.0	170.0	170.0	17.1%	
Exelon	ACEC	Related	0.0	0.0	0.0	0.0	530.0	530.0	5.5%	
		Unrelated	0.0	879.0	0.0	0.0	8,169.4	9,048.4	94.5%	
	BGE	Related	0.0	130.0	0.0	0.0	120.0	250.0	7.7%	
		Unrelated	0.0	10.0	0.0	0.0	3,002.1	3,012.1	92.3%	
	COMED	Related	0.0	0.0	0.0	0.0	0.0	0.0	0.0%	
		Unrelated	111.7	2,434.5	1,150.0	575.0	12,552.0	16,823.2	100.0%	
	DPL	Related	0.0	60.0	0.0	0.0	0.0	60.0	0.9%	
		Unrelated	451.0	361.2	0.0	0.0	6,104.4	6,916.6	99.1%	
	PECO	Related	0.0	0.0	0.0	0.0	7,515.0	7,515.0	27.5%	
		Unrelated	5.0	3,740.5	0.0	0.0	16,065.0	19,810.5	72.5%	
	PEPCO	Related	0.0	80.0	0.0	0.0	423.0	503.0	2.2%	
		Unrelated	45.0	1,708.6	0.0	0.0	21,114.3	22,867.9	97.8%	
First Energy	APS	Related	0.0	525.0	0.0	0.0	928.0	1,453.0	4.7%	
		Unrelated	5,050.0	2,384.7	20.0	0.0	21,778.1	29,232.8	95.3%	
	ATSI	Related	0.0	0.0	0.0	0.0	1,678.0	1,678.0	10.9%	
		Unrelated	998.0	4,095.0	0.0	955.0	7,599.0	13,647.0	89.1%	
	JCPLC	Related	0.0	0.0	0.0	0.0	0.0	0.0	0.0%	
		Unrelated	0.0	1,775.8	0.0	0.0	13,975.6	15,751.4	100.0%	
	MEC	Related	0.0	0.0	0.0	0.0	0.0	0.0	0.0%	
		Unrelated	0.0	2,640.9	75.0	0.0	14,743.0	17,458.9	100.0%	
	PE	Related	0.0	0.0	0.0	0.0	534.0	534.0	2.8%	
		Unrelated	0.0	2,042.3	0.0	85.0	16,620.6	18,747.9	97.2%	
OVEC	OVEC	Related	0.0	0.0	0.0	0.0	0.0	0.0	0.0%	
		Unrelated	0.0	0.0	0.0	0.0	0.0	0.0	0.0%	
PPL	PPL	Related	0.0	600.0	0.0	0.0	1,661.0	2,261.0	8.6%	
		Unrelated	55.0	5,862.0	51.6	0.0	17,959.7	23,928.3	91.4%	
PSEG	PSEG	Related	0.0	2,488.0	51.1	0.0	9,297.0	11,836.1	38.7%	
		Unrelated	0.0	806.4	0.0	0.0	17,965.5	18,771.9	61.3%	
Con Ed	REC	Related	0.0	0.0	0.0	0.0	0.0	0.0	0.0%	
		Unrelated	0.0	0.0	0.0	0.0	6.9	6.9	100.0%	
Total		Related	75.0	9,323.5	51.1	0.0	31,044.8	40,494.4	13.9%	
		Unrelated	8,174.7	34,540.9	4,306.6	2,700.0	200,195.8	249,918.1	86.1%	

## Combustion Turbine – Natural Gas Project Developer and Transmission Owner Relationships

Table 12-48 shows the relationship between the project developer and transmission owner for all CT – natural gas project MW that have entered the PJM generation queue from January 1, 1997, through June 30, 2022, by transmission owner and project status. Of the 9,948.8 CT – natural gas project MW that have achieved in service or under construction status during this time period, 1,803.0 (18.1 percent) have been developed by Transmission Owners building in their own service territory. PSEG is the transmission owner with the highest percentage of affiliates building CT – natural gas projects in their own service territory. Of the 2,956.0 MW that entered the queue in the PSEG Zone during the time period of January 1, 1997, through June 30, 2022, 1,818.1 MW (61.5 percent) have been submitted by PSEG or one of their affiliated companies.

**Table 12-48 Relationship between project developer and transmission owner for all CT – natural gas project MW in the queue: June 30, 2022**

Parent Company	Transmission Owner	Related to Developer	MW by Project Status					Total	Percent of Total
			Active	In Service	Under Construction	Suspended	Withdrawn		
AEP	AEP	Related	0.0	0.0	0.0	0.0	0.0	0.0	0.0%
		Unrelated	842.1	227.0	0.0	0.0	1,525.0	2,594.1	100.0%
AES	DAY	Related	0.0	47.0	0.0	0.0	0.0	47.0	15.1%
		Unrelated	20.0	36.5	0.0	0.0	208.0	264.5	84.9%
DUQ	DUQ	Related	0.0	0.0	0.0	0.0	0.0	0.0	0.0%
		Unrelated	3.5	219.4	0.0	0.0	15.0	237.9	100.0%
DOM	DOM	Related	1,138.0	824.0	0.0	0.0	83.7	2,045.7	47.9%
		Unrelated	0.0	1,182.7	0.0	0.0	1,043.1	2,225.8	52.1%
DUKE	DUKE	Related	0.0	0.0	0.0	0.0	0.0	0.0	0.0%
		Unrelated	0.0	0.0	0.0	0.0	0.0	0.0	0.0%
EKPC	EKPC	Related	0.0	0.0	0.0	0.0	0.0	0.0	0.0%
		Unrelated	0.0	0.0	0.0	0.0	73.0	73.0	100.0%
Exelon	ACEC	Related	0.0	0.0	0.0	0.0	0.0	0.0	0.0%
		Unrelated	0.0	404.4	0.0	230.0	173.0	807.4	100.0%
	BGE	Related	0.0	10.0	0.0	0.0	0.0	10.0	5.7%
		Unrelated	0.0	13.0	0.0	0.0	153.6	166.6	94.3%
	COMED	Related	296.0	0.0	0.0	0.0	0.0	296.0	16.2%
		Unrelated	258.2	478.0	410.0	0.0	383.0	1,529.2	83.8%
	DPL	Related	0.0	0.0	0.0	0.0	0.0	0.0	0.0%
		Unrelated	0.0	1,226.0	0.0	0.0	0.0	1,226.0	100.0%
	PECO	Related	0.0	5.0	0.0	0.0	0.0	5.0	0.8%
		Unrelated	0.0	596.0	0.0	0.0	0.5	596.5	99.2%
	PEPCO	Related	0.0	0.0	0.0	0.0	0.0	0.0	0.0%
		Unrelated	55.3	37.0	0.0	0.0	0.0	92.3	100.0%
First Energy	APS	Related	0.0	0.0	0.0	0.0	0.0	0.0	0.0%
		Unrelated	30.0	1,375.7	70.0	0.0	4.0	1,479.7	100.0%
	ATSI	Related	0.0	0.0	0.0	0.0	0.0	0.0	0.0%
		Unrelated	518.7	40.0	5.0	0.0	25.0	588.7	100.0%
	JCPLC	Related	0.0	0.0	0.0	0.0	0.0	0.0	0.0%
		Unrelated	0.0	720.0	0.0	0.0	2.1	722.1	100.0%
	MEC	Related	0.0	0.0	0.0	0.0	0.0	0.0	0.0%
		Unrelated	0.0	46.1	11.5	0.0	0.0	57.6	100.0%
	PE	Related	0.0	5.0	0.0	0.0	0.0	5.0	0.3%
		Unrelated	92.0	384.9	30.5	463.0	561.8	1,532.2	99.7%
OVEC	OVEC	Related	0.0	0.0	0.0	0.0	0.0	0.0	0.0%
		Unrelated	0.0	0.0	0.0	0.0	0.0	0.0	0.0%
PPL	PPL	Related	0.0	0.0	0.0	0.0	0.0	0.0	0.0%
		Unrelated	0.0	403.2	0.0	0.0	19.9	423.1	100.0%
PSEG	PSEG	Related	0.0	912.0	0.0	0.0	906.1	1,818.1	61.5%
		Unrelated	0.0	228.9	0.0	675.0	234.0	1,137.9	38.5%
Con Ed	REC	Related	0.0	0.0	0.0	0.0	0.0	0.0	0.0%
		Unrelated	0.0	0.0	0.0	0.0	0.0	0.0	0.0%
Total		Related	1,434.0	1,803.0	0.0	0.0	989.8	4,226.8	21.2%
		Unrelated	1,819.8	7,618.8	527.0	1,368.0	4,421.0	15,754.6	78.8%

## Wind Project Developer and Transmission Owner Relationships

Table 12-49 shows the relationship between the project developer and transmission owner for all wind project MW that have entered the PJM generation queue from January 1, 1997, through June 30, 2022, by transmission owner and project status. Of the 11,100.3 wind project MW that have achieved in service or under construction status during this time period, 12.0 MW (0.1 percent) have been developed by transmission owners building in their own service territory. DOM is the transmission owner with the highest percentage of affiliates building wind projects in their own service territory. Of the 10,843.7 MW that entered the queue in the DOM Zone during the time period of January 1, 1997, through June 30, 2022, 2,786.0 MW (25.7 percent) have been submitted by DOM or one of their affiliated companies.

**Table 12-49 Relationship between project developer and transmission owner for all wind project MW in the queue: June 30, 2022**

Parent Company	Transmission Owner	Related to Developer	MW by Project Status					Total	Percent of Total
			Active	In Service	Under Construction	Suspended	Withdrawn		
AEP	AEP	Related	0.0	0.0	0.0	0.0	0.0	0.0	0.0%
		Unrelated	3,523.0	3,544.6	0.0	0.0	24,113.4	31,180.9	100.0%
AES	DAY	Related	0.0	0.0	0.0	0.0	0.0	0.0	0.0%
		Unrelated	0.0	0.0	0.0	0.0	2,080.0	2,080.0	100.0%
DUQ	DUQ	Related	0.0	0.0	0.0	0.0	0.0	0.0	0.0%
		Unrelated	0.0	0.0	0.0	0.0	0.0	0.0	0.0%
DOM	DOM	Related	2,640.0	12.0	0.0	0.0	134.0	2,786.0	25.7%
		Unrelated	2,478.5	310.5	0.0	300.3	4,968.4	8,057.7	74.3%
DUKE	DUKE	Related	0.0	0.0	0.0	0.0	0.0	0.0	0.0%
		Unrelated	0.0	0.0	0.0	0.0	0.0	0.0	0.0%
EKPC	EKPC	Related	0.0	0.0	0.0	0.0	0.0	0.0	0.0%
		Unrelated	0.0	0.0	0.0	0.0	150.3	150.3	100.0%
Exelon	ACEC	Related	0.0	0.0	0.0	0.0	0.0	0.0	0.0%
		Unrelated	3,441.6	7.5	0.0	0.0	4,648.6	8,097.7	100.0%
	BGE	Related	0.0	0.0	0.0	0.0	0.0	0.0	0.0%
		Unrelated	0.0	0.0	0.0	0.0	0.0	0.0	0.0%
COMED	Related	0.0	0.0	0.0	0.0	0.0	0.0	0.0%	
	Unrelated	9,283.2	4,302.1	200.0	0.0	26,270.4	40,055.7	100.0%	
DPL	DPL	Related	0.0	0.0	0.0	0.0	0.0	0.0	0.0%
		Unrelated	7,671.5	0.0	0.0	0.0	2,968.8	10,640.3	100.0%
PECO	PECO	Related	0.0	0.0	0.0	0.0	0.0	0.0	0.0%
		Unrelated	0.0	0.0	0.0	0.0	0.0	0.0	0.0%
PEPCO	PEPCO	Related	0.0	0.0	0.0	0.0	0.0	0.0	0.0%
		Unrelated	0.0	0.0	0.0	0.0	0.0	0.0	0.0%
First Energy	APS	Related	0.0	0.0	0.0	0.0	0.0	0.0	0.0%
		Unrelated	1,029.1	1,429.6	0.0	0.0	3,671.6	6,130.3	100.0%
	ATSI	Related	0.0	0.0	0.0	0.0	0.0	0.0	0.0%
		Unrelated	798.1	0.0	0.0	0.0	1,313.6	2,111.7	100.0%
JCPLC	Related	0.0	0.0	0.0	0.0	0.0	0.0	0.0%	
	Unrelated	10,372.5	0.0	0.0	0.0	7,397.0	17,769.5	100.0%	
MEC	MEC	Related	0.0	0.0	0.0	0.0	0.0	0.0	0.0%
		Unrelated	0.0	0.0	0.0	0.0	0.0	0.0	0.0%
PE	PE	Related	0.0	0.0	0.0	0.0	0.0	0.0	0.0%
		Unrelated	503.7	1,067.5	0.0	0.0	5,500.3	7,071.6	100.0%
OVEC	OVEC	Related	0.0	0.0	0.0	0.0	0.0	0.0	0.0%
		Unrelated	0.0	0.0	0.0	0.0	0.0	0.0	0.0%
PPL	PPL	Related	0.0	0.0	0.0	0.0	0.0	0.0	0.0%
		Unrelated	349.6	226.5	0.0	67.3	3,479.1	4,122.5	100.0%
PSEG	PSEG	Related	0.0	0.0	0.0	0.0	0.0	0.0	0.0%
		Unrelated	1,300.0	0.0	0.0	0.0	20.0	1,320.0	100.0%
Con Ed	REC	Related	0.0	0.0	0.0	0.0	0.0	0.0	0.0%
		Unrelated	0.0	0.0	0.0	0.0	0.0	0.0	0.0%
		Unrelated	0.0	0.0	0.0	0.0	0.0	0.0	0.0%
Total	Total	Related	2,640.0	12.0	0.0	0.0	134.0	2,786.0	2.0%
		Unrelated	40,750.7	10,888.3	200.0	367.6	86,581.5	138,788.0	98.0%



## Solar Project Developer and Transmission Owner Relationships

Table 12-50 shows the relationship between the project developer and transmission owner for all solar project MW that have entered the PJM generation queue from January 1, 1997, through June 30, 2022, by transmission owner and project status. Of the 6,854.9 solar project MW that have achieved in service or under construction status during this time period, 1,505.8 MW (22.0 percent) have been developed by transmission owners building in their own service territory. PSEG is the transmission owner with the highest percentage of affiliates building solar projects in their own service territory. Of the 872.7 MW that entered the queue in the PSEG Zone during the time period of January 1, 1997, through June 30, 2022, 175.4 MW (20.1 percent) have been submitted by PSEG or one of their affiliated companies.

**Table 12-50 Relationship between project developer and transmission owner for all solar project MW in the queue: June 30, 2022**

Parent Company	Transmission Owner	Related to Developer	MW by Project Status					Total	Percent of Total
			Active	In Service	Under Construction	Suspended	Withdrawn		
AEP	AEP	Related	154.0	34.7	0.0	0.0	165.0	353.7	0.7%
		Unrelated	42,132.0	430.0	544.0	97.9	9,321.4	52,525.3	99.3%
AES	DAY	Related	0.0	0.0	0.0	0.0	21.5	21.5	0.4%
		Unrelated	2,780.5	2.5	400.0	178.0	2,273.1	5,634.0	99.6%
DUQ	DUQ	Related	0.0	0.0	0.0	0.0	0.0	0.0	0.0%
		Unrelated	71.8	0.0	17.1	0.0	33.0	121.9	100.0%
DOM	DOM	Related	3,558.0	1,197.4	122.8	0.0	251.9	5,130.1	9.9%
		Unrelated	27,709.3	1,261.3	1,255.4	952.1	15,369.3	46,547.4	90.1%
DUKE	DUKE	Related	49.0	0.0	0.0	0.0	56.4	105.4	6.7%
		Unrelated	549.9	200.0	0.0	80.0	633.0	1,462.9	93.3%
EKPC	EKPC	Related	0.0	0.0	0.0	0.0	0.0	0.0	0.0%
		Unrelated	5,811.0	0.0	0.0	195.0	998.9	7,004.9	100.0%
Exelon	ACEC	Related	0.0	0.0	0.0	0.0	8.3	8.3	0.3%
		Unrelated	667.4	65.0	2.6	0.0	2,282.8	3,017.7	99.7%
	BGE	Related	0.0	0.0	0.0	0.0	20.0	20.0	7.2%
		Unrelated	154.9	1.1	0.0	0.0	101.6	257.6	92.8%
COMED	Related	0.0	9.0	0.0	0.0	0.0	9.0	0.1%	
	Unrelated	13,638.4	0.0	0.0	32.5	3,496.2	17,167.1	99.9%	
DPL	DPL	Related	0.0	7.4	0.0	0.0	0.0	7.4	0.1%
		Unrelated	2,006.1	123.0	251.6	202.0	2,628.5	5,211.2	99.9%
PECO	PECO	Related	0.0	0.0	0.0	0.0	0.0	0.0	0.0%
		Unrelated	125.6	3.3	0.0	0.0	98.2	227.1	100.0%
PEPCO	PEPCO	Related	0.0	0.0	0.0	0.0	0.0	0.0	0.0%
		Unrelated	240.1	2.5	0.0	0.0	441.6	684.3	100.0%
First Energy	APS	Related	71.2	0.0	0.0	0.0	0.0	71.2	0.8%
		Unrelated	6,178.8	120.5	30.0	195.2	2,823.5	9,347.9	99.2%
	ATSI	Related	0.0	0.0	0.0	0.0	0.0	0.0	0.0%
		Unrelated	6,607.6	0.0	0.0	245.0	2,096.7	8,949.3	100.0%
	JCPLC	Related	0.0	0.0	0.0	0.0	12.0	12.0	0.5%
		Unrelated	453.7	412.2	0.0	18.6	1,629.2	2,513.7	99.5%
	MEC	Related	0.0	0.0	0.0	0.0	0.0	0.0	0.0%
		Unrelated	809.4	0.0	60.0	32.0	986.7	1,888.1	100.0%
PE	Related	0.0	0.0	0.0	0.0	0.0	0.0	0.0%	
	Unrelated	6,335.8	13.5	0.0	60.2	2,684.2	9,093.7	100.0%	
OVEC	OVEC	Related	0.0	0.0	0.0	0.0	0.0	0.0	0.0%
		Unrelated	430.0	0.0	0.0	0.0	78.0	508.0	100.0%
PPL	PPL	Related	124.8	0.0	0.0	0.0	0.0	124.8	3.4%
		Unrelated	2,383.6	25.0	0.0	60.0	1,025.1	3,493.7	96.6%
PSEG	PSEG	Related	0.0	129.3	5.2	0.0	40.9	175.4	20.1%
		Unrelated	37.9	112.6	16.1	0.0	530.7	697.3	79.9%
Con Ed	REC	Related	0.0	0.0	0.0	0.0	0.0	0.0	0.0%
		Unrelated	0.0	0.0	0.0	0.0	0.0	0.0	0.0%
Total	Total	Related	3,956.9	1,377.8	128.0	0.0	576.0	6,038.6	3.3%
		Unrelated	119,123.8	2,772.4	2,576.7	2,348.4	49,531.6	176,353.0	96.7%

### Battery Project Developer and Transmission Owner Relationships

Table 12-51 shows the relationship between the project developer and transmission owner for all battery project MW that have entered the PJM generation queue from January 1, 1997, through June 30, 2022, by transmission owner and project status. Of the 283.3 battery project MW that have achieved in service or under construction status during this time period, 40.0 MW (14.1 percent) have been developed by transmission owners building in their own service territory. PECO is the transmission owner with the highest percentage of affiliates building battery projects in their own service territory. Of the 65.3 MW that entered the queue in the PECO Zone during the time period of January 1, 1997, through June 30, 2022, 40.0 MW (61.3 percent) have been submitted by PECO or one of their affiliated companies.

**Table 12-51 Relationship between project developer and transmission owner for all battery project MW in the queue: June 30, 2022**

Parent Company	Transmission Owner	Related to Developer	MW by Project Status					Total	Percent of Total
			Active	In Service	Under Construction	Suspended	Withdrawn		
AEP	AEP	Related	100.0	6.0	0.0	0.0	10.0	116.0	0.9%
		Unrelated	10,935.9	4.0	0.0	0.0	1,711.2	12,651.1	99.1%
AES	DAY	Related	0.0	20.0	0.0	0.0	0.0	20.0	2.6%
		Unrelated	340.0	0.0	0.0	0.0	414.9	754.9	97.4%
DUQ	DUQ	Related	0.0	0.0	0.0	0.0	0.0	0.0	0.0%
		Unrelated	205.0	0.0	0.0	0.0	20.0	225.0	100.0%
DOM	DOM	Related	996.7	0.0	0.0	0.0	0.0	996.7	6.0%
		Unrelated	14,031.5	0.0	0.0	0.0	1,491.4	15,522.9	94.0%
DUKE	DUKE	Related	0.0	14.0	0.0	0.0	23.3	37.3	9.5%
		Unrelated	277.2	6.0	0.0	0.0	72.2	355.4	90.5%
EKPC	EKPC	Related	0.0	0.0	0.0	0.0	0.0	0.0	0.0%
		Unrelated	176.0	0.0	0.0	0.0	20.3	196.3	100.0%
Exelon	ACEC	Related	0.0	0.0	0.0	0.0	0.0	0.0	0.0%
		Unrelated	1,773.0	0.0	0.0	0.0	181.0	1,954.0	100.0%
	BGE	Related	2.5	0.0	0.0	0.0	20.0	22.5	1.5%
		Unrelated	1,196.0	0.0	0.0	0.0	240.6	1,436.6	98.5%
	COMED	Related	0.0	0.0	0.0	0.0	0.0	0.0	0.0%
		Unrelated	7,376.1	87.0	0.0	0.0	1,104.0	8,567.1	100.0%
	DPL	Related	1.0	0.0	0.0	0.0	0.0	1.0	0.1%
		Unrelated	1,063.0	0.0	0.0	0.0	364.0	1,427.0	99.9%
	PECO	Related	0.0	0.0	0.0	0.0	40.0	40.0	61.3%
		Unrelated	0.0	1.0	0.0	0.0	24.3	25.3	38.7%
	PEPCO	Related	1.0	0.0	0.0	0.0	0.0	1.0	0.1%
		Unrelated	795.0	0.0	0.0	0.0	20.0	815.0	99.9%
First Energy	APS	Related	0.0	0.0	0.0	0.0	0.0	0.0	0.0%
		Unrelated	2,944.8	39.9	0.0	0.0	356.0	3,340.7	100.0%
	ATSI	Related	0.0	0.0	0.0	0.0	0.0	0.0	0.0%
		Unrelated	2,218.0	0.0	0.0	0.0	226.4	2,444.4	100.0%
	JCPLC	Related	0.0	0.0	0.0	0.0	0.0	0.0	0.0%
		Unrelated	897.8	40.0	14.0	2.0	752.2	1,706.0	100.0%
	MEC	Related	0.0	0.0	0.0	0.0	0.0	0.0	0.0%
		Unrelated	955.2	0.0	0.0	0.0	244.7	1,199.9	100.0%
	PE	Related	0.0	0.0	0.0	0.0	0.0	0.0	0.0%
		Unrelated	997.8	28.4	0.0	0.0	401.0	1,427.2	100.0%
OVEC	OVEC	Related	0.0	0.0	0.0	0.0	0.0	0.0	0.0%
		Unrelated	0.0	0.0	0.0	0.0	0.0	0.0	0.0%
PPL	PPL	Related	0.0	0.0	0.0	0.0	0.0	0.0	0.0%
		Unrelated	475.0	20.0	0.0	20.0	309.8	824.8	100.0%
PSEG	PSEG	Related	0.0	0.0	0.0	0.0	0.0	0.0	0.0%
		Unrelated	1,775.0	3.0	0.0	7.0	9.5	1,794.5	100.0%
Con Ed	REC	Related	0.0	0.0	0.0	0.0	0.0	0.0	0.0%
		Unrelated	0.0	0.0	0.0	0.0	0.0	0.0	0.0%
Total		Related	1,101.2	40.0	0.0	0.0	93.3	1,234.5	2.1%
		Unrelated	48,432.3	229.3	14.0	29.0	7,963.6	56,668.2	97.9%

## Renewable Hybrid Project Developer and Transmission Owner Relationships

Table 12-52 shows the relationship between the project developer and transmission owner for all renewable hybrid project MW that have entered the PJM generation queue from January 1, 1997, through June 30, 2022, by transmission owner and project status. Of the 6.8 renewable hybrid project MW that have achieved in service or under construction status during this time period, 3.7 MW (53.9 percent) have been developed by transmission owners building in their own service territory. PSEG is the transmission owner with the highest percentage of affiliates building hybrid projects in their own service territory. Of the 59.7 MW that entered the queue in the PSEG Zone during the time period of January 1, 1997, through June 30, 2022, 3.7 MW (6.2 percent) have been submitted by PSEG or one of their affiliated companies.

**Table 12-52 Relationship between project developer and transmission owner for all hybrid project MW in the queue: June 30, 2022**

Parent Company	Transmission Owner	Related to Developer	Under					MW by Project Status	
			Active	In Service	Construction	Suspended	Withdrawn	Total	Percent of Total
AEP	AEP	Related	180.0	0.0	0.0	0.0	0.0	180.0	1.0%
		Unrelated	14,736.6	0.0	3.2	0.0	3,360.8	18,100.6	99.0%
AES	DAY	Related	0.0	0.0	0.0	0.0	0.0	0.0	0.0%
		Unrelated	415.9	0.0	0.0	0.0	0.0	415.9	100.0%
DUQ	DUQ	Related	0.0	0.0	0.0	0.0	0.0	0.0	0.0%
		Unrelated	107.5	0.0	0.0	0.0	0.0	107.5	100.0%
DOM	DOM	Related	17.0	0.0	0.0	0.0	0.0	17.0	0.2%
		Unrelated	7,361.8	0.0	0.0	0.0	2,279.9	9,641.7	99.8%
DUKE	DUKE	Related	0.0	0.0	0.0	0.0	0.0	0.0	0.0%
		Unrelated	50.0	0.0	0.0	0.0	0.0	50.0	100.0%
EKPC	EKPC	Related	0.0	0.0	0.0	0.0	0.0	0.0	0.0%
		Unrelated	2,796.3	0.0	0.0	0.0	1,004.0	3,800.3	100.0%
Exelon	ACEC	Related	0.0	0.0	0.0	0.0	0.0	0.0	0.0%
		Unrelated	221.0	0.0	0.0	0.0	14.5	235.5	100.0%
	BGE	Related	0.0	0.0	0.0	0.0	0.0	0.0	0.0%
		Unrelated	0.0	0.0	0.0	0.0	0.0	0.0	0.0%
	COMED	Related	0.0	0.0	0.0	0.0	0.0	0.0	0.0%
		Unrelated	3,087.5	0.0	0.0	0.0	629.9	3,717.4	100.0%
	DPL	Related	0.0	0.0	0.0	0.0	0.0	0.0	0.0%
		Unrelated	270.0	0.0	0.0	0.0	104.5	374.5	100.0%
	PECO	Related	0.0	0.0	0.0	0.0	0.0	0.0	0.0%
		Unrelated	5.0	0.0	0.0	0.0	0.0	5.0	100.0%
	PEPCO	Related	0.0	0.0	0.0	0.0	0.0	0.0	0.0%
		Unrelated	1,452.0	0.0	0.0	0.0	20.0	1,472.0	100.0%
First Energy	APS	Related	0.0	0.0	0.0	0.0	0.0	0.0	0.0%
		Unrelated	2,717.3	0.0	0.0	36.3	565.0	3,318.6	100.0%
	ATSI	Related	0.0	0.0	0.0	0.0	0.0	0.0	0.0%
		Unrelated	891.6	0.0	0.0	0.0	334.9	1,226.5	100.0%
	JCPLC	Related	0.0	0.0	0.0	0.0	0.0	0.0	0.0%
		Unrelated	235.0	0.0	0.0	0.0	0.0	235.0	100.0%
	MEC	Related	0.0	0.0	0.0	0.0	0.0	0.0	0.0%
		Unrelated	146.2	0.0	0.0	15.9	23.7	185.8	100.0%
	PE	Related	0.0	0.0	0.0	0.0	0.0	0.0	0.0%
		Unrelated	1,188.8	0.0	0.0	3.0	184.2	1,376.1	100.0%
OVEC	OVEC	Related	0.0	0.0	0.0	0.0	0.0	0.0	0.0%
		Unrelated	178.5	0.0	0.0	0.0	0.0	178.5	100.0%
PPL	PPL	Related	0.0	0.0	0.0	0.0	0.0	0.0	0.0%
		Unrelated	741.0	0.0	0.0	90.0	201.0	1,032.0	100.0%
PSEG	PSEG	Related	0.0	1.1	2.6	0.0	0.0	3.7	6.2%
		Unrelated	20.0	0.0	0.0	0.0	36.1	56.1	93.8%
Con Ed	REC	Related	0.0	0.0	0.0	0.0	0.0	0.0	0.0%
		Unrelated	0.0	0.0	0.0	0.0	0.0	0.0	0.0%
Total		Related	197.0	1.1	2.6	0.0	0.0	200.7	0.4%
		Unrelated	36,621.9	0.0	3.2	145.2	8,758.5	45,528.7	99.6%

## Regional Transmission Expansion Plan (RTEP)<sup>57</sup>

The PJM RTEP process is designed to identify needed transmission system additions and improvements to continue to provide reliable service throughout the RTO. The objective of the RTEP process is to provide PJM with an optimal set of solutions necessary to solve reliability issues, operational performance issues and transmission constraints.

The RTEP process initially considered only factors such as load growth and the generation interconnection requests in its development of the 15 year plan. Currently, the RTEP process includes a broader range of inputs including the effects of public policy, market efficiency, interregional coordination and the effects of aging infrastructure.

### RTEP Process

The PJM RTEP process is a 24 month planning process that identifies reliability issues for the next 15 year period. This 24 month planning process includes a process to build power flow models that represent the expected future system topology, studies to identify issues, stakeholder input and PJM Board of Manager approvals. The 24 month planning process is made up of overlapping 18 month planning cycles to identify and develop shorter lead time transmission upgrades and one 24 month planning cycle to provide sufficient time for the identification and development of longer lead time transmission upgrades that may be required to satisfy planning criteria.

### Market Efficiency Process

PJM's Regional Transmission Expansion Plan (RTEP) process includes a market efficiency analysis. The stated purpose of the market efficiency analysis is: to determine which reliability based enhancements have economic benefit if accelerated; to identify new transmission enhancements that result in economic benefits; and to identify economic benefits associated with modification to existing RTEP reliability based enhancements that when modified would relieve one or more economic constraints. PJM identifies the economic benefit of proposed transmission projects based on production cost

<sup>57</sup> The material in this section is based in part on the PJM Manual 14B: PJM Region Transmission Planning Process. See PJM. "PJM Manual 14B: PJM Region Transmission Planning Process," Rev. 51 (December 15, 2021).

analyses.<sup>58</sup> PJM presents the RTEP market efficiency enhancements to the PJM Board, along with stakeholder input, for Board approval.

To be recommended to the PJM Board of Managers for approval, the relative benefits and costs of the economic based enhancement or expansion of the proposed project must reduce congestion on one or more constraints by at least one dollar, meet a ratio threshold of at least 1.25:1 and have an independent cost review, performed by PJM, if expected costs are over \$50 million. PJM provides the review of a project with a projected cost of over \$50 million using its own staff or outside consultants that are hired to assist in the review. PJM presents its findings to the TEAC where PJM's findings are reviewed by the stakeholders. While stakeholders can comment on the findings, PJM makes the final decision about what costs will be used for the purpose of calculating the cost/benefit ratio for the project. The cost/benefit ratio is the ratio of the present value of the total annual benefit for 15 years to the present value of the total annual cost for the first 15 years of the life of the enhancement or expansion.

The market efficiency process is comprised of a 12 month cycle and a 24 month cycle, both of which begin and end on the calendar year. The 12 month cycle is used for analysis of modifications and accelerations to approved RTEP projects only. The 24 month cycle is used for analysis of new economic transmission projects for years five through 15. This long-term proposal window takes place concurrently with the long-term proposal window for reliability projects.

PJM's first market efficiency analysis was performed in 2013, prior to Order 1000. The 2013 window was open from August 12, 2013, through September 26, 2013. This window accepted proposals to address historical congestion on 25 identified flowgates. PJM received 17 proposals from six entities. One project, submitted by an incumbent transmission owner, was approved by the PJM Board.

<sup>58</sup> See PJM. "PJM Regional Transmission Expansion Plan: 2019," (February 29, 2020) <<https://www.pjm.com/-/media/library/reports-notices/2019-rtep/2019-rtep-book-1.ashx>>.

The first market efficiency cycle conducted under Order 1000 was performed during the 2014/2015 RTEP long term window. The 2014/2015 long term window was open from November 1, 2014, through February 28, 2015. This window accepted proposals to address historical congestion on 12 identified flowgates. PJM received 93 proposals from 19 entities. Thirteen projects, all submitted by an incumbent transmission owner, were approved by the PJM Board.

The second market efficiency cycle was performed during the 2016/2017 RTEP long term window. The 2016/2017 long term window was open from November 1, 2016, through February 28, 2017. This window accepted proposals to address historical congestion on four identified flowgates. PJM received 96 proposals from 20 entities. Four projects, all submitted by an incumbent transmission owner, were approved by the PJM Board.

PJM also held an addendum 2016/2017 long term window. This 2016/2017 1A long term window was open from September 14, 2017, through September 28, 2017. This window accepted proposals to address historical congestion on one identified flowgate. PJM received three proposals from two entities. One project, submitted by an incumbent transmission owner, was approved by the PJM Board.

The fourth market efficiency cycle was performed for the 2018/2019 RTEP long term window. The 2018/2019 long term window was open from November 2, 2018, through March 15, 2019. This window accepted proposals to address historical congestion on one internal and three interregional flowgates. PJM received 33 proposals from 10 entities. One project, submitted by an incumbent transmission owner, was approved by the PJM Board to address the historical congestion on the internal flowgate, and one project, submitted by an incumbent transmission owner, was approved by the PJM Board to address the historical congestion on one of the interregional flowgates.<sup>59</sup>

The fifth market efficiency cycle was performed for the 2020/2021 RTEP long term window. The 2020/2021 RTEP long term window was open from November 11, 2020, through May 11, 2021. This window accepted proposals

<sup>59</sup> No proposals effectively resolved the congestion on two of the three identified interregional market efficiency flowgates.

to address historical congestion on four internal flowgates. PJM received 24 proposals from seven entities. Four projects, all submitted by an incumbent transmission owner, were approved by the PJM Board.

## The Cost/Benefit Evaluation

For an RTEP project to be recommended to the PJM Board of Managers for approval as a market efficiency project, the relative benefits and costs of the economic based enhancement or expansion must meet a cost/benefit ratio threshold of at least 1.25:1.

The total benefit of a project is calculated as the sum of the net present value of calculated energy market benefits and calculated reliability pricing model (RPM) benefits for a 15 year period, starting with the projected in service date of the project. PJM measures benefits as reductions in estimated load charges and production costs in the energy market and reductions in estimated load capacity payments and in system capacity costs in the capacity market, but does not weight increases and decreases in benefits equally. The method for calculating energy market benefits and reliability pricing model benefits depends on whether the project is regional or subregional. A regional project is any project rated at or above 230 kV. A subregional project is any project rated at less than 230 kv.

The energy market benefit analysis uses an energy market simulation tool that produces an hourly least-cost, security constrained market solution, including total operational costs, hourly LMPs, bus specific injections and bus specific withdrawals for each modeled year with and without the proposed RTEP project. Using the output from the model, PJM calculates changes in energy production costs and load energy payments.

The definition of the energy benefit analysis depends on whether the project is regional or subregional. For a regional project, the energy benefit for each modeled year is equal to 50 percent of the change in system wide total system energy production costs with and without the project plus 50 percent of the change in zonal load payments with and without the project, including only those zones where the project reduced the load payments. For subregional

projects, the calculation of benefits for each modeled year ignores any impact on system wide energy production costs and is instead based only the change in zonal load energy payments with and without the project, but including only those zones where the project reduced the load energy payments.

In both the regional and subregional analysis, changes in zonal load energy payments are netted against changes in the estimated value of any Auction Revenue Rights (ARR) that sink in that zone for purposes of determining whether a zone benefits from a proposed RTEP project. Estimated ARR credits are calculated for each simulated year using the most recent planning year's actual ARR MW combined with FTR prices assumed to be equal to the market simulation's CLMP differences between ARR source and sink points. The value of the ARR rights with and without the RTEP project is evaluated based on changes in modeled CLMPs on the latest allocation of ARR rights. ARR MW allocations are not adjusted to reflect any potential changes in ARR allocations which may be allowed by the RTEP upgrade and the value of the ARRs are assumed to match the forecasted CLMP differences on the ARR paths.

The Reliability Pricing Model (RPM) Benefit analysis is conducted using the RPM solution software, with and without the proposed RTEP project, using a set of estimated capacity offers.

The definition of the benefit in the RPM benefit analysis depends on whether the project is regional or subregional. For a regional project, the RPM benefit for each modeled year is equal to 50 percent of the change in system wide total system capacity payments with and without the project plus 50 percent of the change in zonal capacity payments with and without the project, including only those zones where the project reduced the capacity payments. For subregional projects, the reliability pricing model benefits for each modeled year ignores any impact on system wide total capacity payments and is equal to the change in zonal capacity payments with and without the project, including only those zones where the project reduced the capacity payments.

The difference in the benefits calculation used in the regional and subregional cost/benefit threshold tests is related to how the direct costs of the transmission projects are allocated for approved regional and subregional projects. The costs of an approved regional project are allocated so that 50 percent of the total costs are allocated on a system wide load ratio share basis and the remaining 50 percent of the total costs are allocated to zones with projected energy market benefits and reliability pricing model benefits in proportion to those projected positive benefits. The costs of an approved subregional project are allocated so that the total costs of the project is allocated to zones with projected energy market benefits and reliability pricing model benefits in proportion to those projected positive benefits.

There are significant issues with PJM's cost/benefit analysis. The current rules governing cost/benefit analysis of competing transmission projects do not accurately measure the relative costs and benefits of transmission projects. The current rules do not account for the fact that the benefits of projects are uncertain and highly sensitive to the modeling assumptions used. The current rules explicitly ignore the increased zonal load costs that a project may create. The current rules do not account for the fact that the project costs are nonbinding estimates, are not subject to cost caps and may significantly exceed the estimated costs. These flaws have contributed to PJM approving market efficiency projects with forecasted benefits that do not exceed the forecasted costs.

The recent introduction of storage as transmission assets (SATA) raises a number of additional concerns about PJM's cost/benefit analysis. PJM's cost/cost analysis uses a 15 year forecast for purposes of evaluating benefits and costs of traditional transmission assets with an expected useful life of 50 years or more. Using the same 15 year horizon does not make sense for SATA resources with an expected useful life of 10 years or less, depending on use. Using a 15 year benefit horizon will exaggerate the forecasted benefit stream relative to the stream of benefits that could be produced over the expected useful life relative to traditional transmission assets. Further, the rules for how to account for the actual, and forecasted, revenues and charges for operating the SATA to provide transmission load relief have not been established.

Without clear rules on how to allocate operational revenues and costs it is impossible to develop forecasted benefits and/or costs of a SATA project.

The broader issue is that the market efficiency project approach explicitly allows transmission projects to compete against future generation projects, but without allowing the generation projects to compete. Projecting speculative transmission related benefits for 15 years based on the existing generation fleet and existing patterns of congestion eliminates the potential for new generation to respond to market signals. The market efficiency process allows assets built under the cost of service regulatory paradigm to displace generation assets built under the competitive market paradigm. The MMU recommends that the market efficiency process be eliminated.

### The Transource Project

The Transource Project (Project 9A) is an example of a PJM approved market efficiency project that initially passed PJM's 1.25 cost/benefit threshold test despite having benefits, if accurately calculated, that were less than forecasted costs. This project also illustrates the risks of ignoring potential cost increases given that the costs included in the cost/benefit calculation are nonbinding estimates. The Transource Project was proposed in PJM's 2014/2015 RTEP long term window. PJM's 2014/2015 RTEP long term window was the first market efficiency cycle under Order 1000. The 2014/2015 long term window was open from November 1, 2014, through February 28, 2015. This window accepted proposals to address historical congestion on 12 identified flowgates. The AP South Interface was one of the 12 identified flow gates listed in the 2014/15 RTEP Long Term Proposal Window Problem Statement.

A total of 41 market efficiency projects were proposed to address congestion on the AP South Transmission Interface. Transource Energy LLC, together with Dominion High Voltage, submitted a proposal referenced by PJM as Project 9A (or IEC or the Transource project) to address AP South related congestion.

Project 9A was considered a subregional project based on its voltage level, meaning that changes in forecasted system costs were not considered for purposes of estimating the cost/benefit ratios. Instead, only reductions in

zonal load costs were considered as a benefit of the project. Any increases in zonal load costs were ignored in the analysis.

The initial study had a benefit to cost ratio of 2.48, with a capital cost of \$340.6 million. The sum of the positive (energy cost reductions) effects was \$1,188.07 million. The sum of negative effects (energy cost increases) was \$851.67 million. The net actual benefit of the project in the study was therefore \$336.40 million, not the \$1,188.07 used in the study. Using the total benefits (positive and negative) to compare to the net present value of costs, the benefit to cost ratio was 0.70, not 2.48. The project should have been rejected on those grounds.

Subsequent studies of the 9A project have reduced its benefit/cost ratio as a result of increased costs, decreased congestion on the AP South Interface since 2014 and a reduction in peak load forecasts since 2015.

PJM's 2019 study using simulations for years 2017, 2021, 2024 and 2027 had a cost benefit ratio of 2.10 with a capital cost of \$383.63 million. The sum of the positive (energy cost reductions) effects was \$855.19 million, a reduction of \$322 million (28.0 percent) from the initial study. The sum of negative effects (energy cost increases) was \$827.34 million, a reduction of \$27.86 million (3.3 percent) from the results of the initial study. The net actual benefit of the project in the 2019 study was \$27.85 million, not the \$1,188.07 from the initial study. Using the total benefits (positive and negative) to compare to the net present value of costs in the 2019 analysis, the benefit to cost ratio was 0.07, not 2.10. The project should have been rejected on those grounds.

A portion of Project 9A in Pennsylvania was challenged in a proceeding at the Pennsylvania PUC. On May 20, 2021, the Pennsylvania PUC denied the Transource application to build in Pennsylvania based on failure to demonstrate need combined with negative economic and environmental effects.<sup>60</sup> Transource is appealing the decision at the state and federal level.<sup>61</sup>

<sup>60</sup> See *Applications of Transource Pennsylvania, LLC for approval of the Siting and Construction of the 230 kV Transmission Line Associated with the Independence Energy Connection—East and West Projects in portions of York and Franklin Counties, Pennsylvania et al.*, Opinion and Order, Docket No. A-2017-2640195 et al. (May 20, 2021).

<sup>61</sup> See *Transource Pennsylvania, LLC et al. v. Pennsylvania Public Utility Commission*, Docket No. 689 CD 2021 (Commonwealth of Pennsylvania Court); *Transource Pennsylvania LLC v. Gladys Brown Dutrieuille, et al.*, Docket No. 21-2567 (USDC M.D. Pa.).

On September 22, 2021, the PJM Board endorsed PJM's recommendation to suspend the Transource IEC (9A) Project, based on the rejection by the Pennsylvania PUC. Project 9A was removed from PJM's planning models pending future updates.<sup>62</sup> At the time of the suspension, \$131.9 million in material, engineering, land rights and project support costs had been incurred by developers, but there was no increase in transmission capability associated with the project.<sup>63</sup>

While suspended, PJM is required by Schedule 6 of the Operating Agreement (OA) to "annually review the cost and benefits" of Board approved market efficiency projects that have not commenced construction or have not received state siting approval. Under Schedule 6, PJM's 2021 study showed a cost/benefit ratio of 1.00 with a capital cost of \$453.71 million. The sum of the positive (energy cost reductions) effects was \$452.4 million, a reduction of \$735.7 million (-61.9 percent) from the initial study. The sum of negative effects (energy cost increases) was \$452.4 million, a reduction of \$399.3 million (46.9 percent) in the negative effects from the -\$851.7 results of the initial study. The net benefit of the project in the 2021 study was -\$159.8 million, not the \$1,188.07 from the initial study. Using the total benefits (positive and negative) to compare to the net present value of costs in the 2019 analysis, the benefit to cost ratio was -0.35, not 2.10. The project should be rejected on these grounds rather than simply suspended.

## PJM MISO Interregional Market Efficiency Process (IMEP)

PJM and MISO developed a process to facilitate the construction of interregional projects in response to the Commission's concerns about interregional coordination along the PJM-MISO seam. This process, called the Interregional Market Efficiency Process (IMEP), operates on a two year study schedule and is designed to address forward looking congestion. To qualify as an IMEP project, the project must be evaluated in a joint study process,

<sup>62</sup> Nick Dumitriu, Principal Engineer, PJM Market Simulation, Market Efficiency Update presented to the Transmission Expansion Advisory Committee (November 30, 2021) at 18 <<https://www.pjm.com/-/media/committees-groups/committees/teac/2021/20211130/20211130-item-02-market-efficiency-update.ashx>>.

<sup>63</sup> Nick Dumitriu, Principal Engineer, PJM Market Simulation, Market Efficiency Update presented to the Transmission Expansion Advisory Committee (November 30, 2021) at 19 <<https://www.pjm.com/-/media/committees-groups/committees/teac/2021/20211130/20211130-item-02-market-efficiency-update.ashx>>.

qualify as an economic transmission enhancement in both PJM and MISO transmission expansion models and meet specific IMEP cost benefit criteria.<sup>64</sup> The allocation of costs to each RTO for IMEPs will be in proportion to the benefits received.

While the IMEP process is a joint effort, PJM and MISO perform their own analysis of benefits to their own system and each uses a different modeling approach and a different metric for determining the benefits of a proposed project. PJM makes use of the cost/benefit analysis used for its own internal market efficiency projects which will, by definition, overstate project benefits by ignoring areas where energy costs are increased. MISO, on the other hand, measures benefits as changes in projected system wide production cost caused by the project. The use of different approaches to measuring benefits is an issue when studying potential benefits of projects in a joint effort, and when using the defined benefits to allocate the costs of IMEP projects to each RTO. PJM's approach will over allocate the costs of IMEP projects to PJM members.

No interregional constraints were identified in either PJM or MISO's regional processes. Therefore, an IMEP study was not required during the 2020/2021 IMEP cycle.

PJM and MISO are currently performing an analysis to determine if an IMEP study will be required for the 2022/2023 IMEP cycle.

## PJM MISO Targeted Market Efficiency Process (TMEP)

PJM and MISO developed the Targeted Market Efficiency Process (TMEP) to facilitate the resolution of historic congestion issues that could be addressed through small, quick implementation projects. The TMEP process operates on a 12 month study schedule. To qualify as a TMEP project, the project must have an estimated in service date by the third summer peak season from the year the project was approved, have an estimated cost of less than \$20 million and must have estimated benefits, based on the projected congestion cost

<sup>64</sup> See "Joint Operating Agreement Between the Midwest Independent Transmission System Operator, Inc. and PJM Interconnection, LLC," (December 11, 2008) <<http://www.pjm.com/directory/merged-tariffs/miso-joa.pdf>>.



relief over a four year period, that exceed the expected installed capacity cost of the proposed project.<sup>65 66</sup>

The benefit of a proposed TMEP project is calculated as the value of eliminating congestion on the affected constraint over a four year period. PJM and MISO calculate the estimated value of eliminating congestion by calculating the average congestion for the two prior years prior and multiplying by four.

The allocation of costs to each RTO for an approved TMEP project will be in proportion to the benefits received by that RTO.<sup>67</sup> The proportion of benefits is calculated using the average shadow price of the constraint times the dfax to affected downstream buses times MW of load at the buses, which is effectively the proportion of congestion paid by the RTO. Within an RTO, the RTO's share of the cost of the approved project is allocated to each transmission control area in proportion to the benefits received by each transmission control area.

PJM and MISO did not conduct a TMEP study in 2019. As a result of decreases in M2M congestion and the addition of transmission upgrades already in process that affect the top congested historical M2M flowgates, PJM and MISO did not conduct a TMEP study in 2020. PJM and MISO agreed to assess the impact of planned upgrades and congestion using an additional year of market data. As a result, PJM and MISO did not conduct a TMEP study in 2021. PJM and MISO are currently performing an analysis to determine if a TMEP study will be necessary in 2022.

The PJM and MISO TMEP process for measuring the projected benefits of a TMEP transmission projects is flawed. The current rules incorrectly count congestion as a cost to load without accounting for how the congestion dollars are or are not returned to the load through the ARRs and FTRs. The benefit of a TMEP transmission upgrade should be the expected difference in the total cost of energy before and after the upgrade to all affected load. This measurement would include the change in expected LMP of all affected load before and after the upgrade, times the MW of load, plus the change in congestion dollars

<sup>65</sup> See "Joint Operating Agreement Between the Midwest Independent Transmission System Operator, Inc. and PJM Interconnection, LLC," (December 11, 2008) <<http://www.pjm.com/directory/merged-tariffs/miso-joa.pdf>>.

<sup>66</sup> On November 2, 2017, PJM submitted a compliance filing including additional revisions to the MISO-PJM JOA to include stakeholder feedback in the TMEP project selection process. See *PJM Interconnection, LLC*, Docket No. ER17-718-000, et al. (November 2, 2017).

<sup>67</sup> See *PJM Interconnection, LLC*, Docket No. ER17-729-000 (December 30, 2016).

returned to the affected load before and after the upgrade. Congestion revenue returned to load is not a cost to the load, it is a credit against the overpayment of load payments relative to generation credits caused by the transmission constraint. Ignoring the return of congestion from ARRs/FTRs overstates the potential benefits of eliminating congestion through the TMEP upgrades, and ignores the value of smaller upgrades that may not eliminate a constraint, but may reduce the average cost of energy for load.

## Multi Driver Process

On September 12, 2014, PJM filed revisions to the tariff to include provisions allowing PJM to include multi driver projects in its regional transmission expansion plan.<sup>68</sup> When a transmission project addresses a combination of reliability, market efficiency and/or public policy objectives, PJM can develop a multi driver approach project by identifying a more efficient or cost effective solution. PJM may choose a solution using either the proportional multi driver method or the incremental multi driver method. The proportional method combines separate solutions that address reliability, economics and/or public policy into a single transmission enhancement or expansion that incorporates separate drivers into one Multi-Driver Project. The incremental method expands or enhances a proposed single-driver solution to include one or more additional component(s) to address a combination of reliability, economic and/or public policy drivers.<sup>69</sup> On February 20, 2015, the Commission approved the tariff revisions with an effective date of November 12, 2014.<sup>70</sup>

On June 7, 2022, PJM opened its first multi driver proposal window. The window seeks to address reliability and market efficiency needs on three identified facilities. PJM will accept proposed solutions until July 22, 2022. The identified facilities are market to market facilities, so PJM will coordinate with MISO when evaluating proposals.

## Supplemental Transmission Projects

Supplemental projects are asserted to be "transmission expansions or enhancements that are not required for compliance with PJM criteria and are

<sup>68</sup> See PJM. Docket No. ER14-2864 (September 12, 2014).

<sup>69</sup> See "PJM Manual 14B: PJM Region Transmission Planning Process," Rev. 51 (December 15, 2021).

<sup>70</sup> 150 FERC ¶ 61,117 (February 20, 2015).

not state public policy projects according to the PJM Operating Agreement. These projects are used as inputs to RTEP models, but are not required for reliability, economic efficiency or operational performance criteria, as determined by PJM.”<sup>71</sup> Attachment M-3 of the PJM OATT defines the process that Transmission Owners (TO) must follow in adding Supplemental Projects in their local plan.

The M-3 Process requires TOs to present the criteria, assumptions and models that they will use to plan and identify Supplemental Projects on a yearly basis. The criteria identified for Supplemental Projects are very broad and include: equipment material condition, performance and risk, operational flexibility and efficiency, infrastructure resilience, customer service or other, as well as asset management.

While the identification of the criteria violations and solutions are reviewed, and stakeholders have the opportunity to comment, the solution that is submitted in the Local Plan is the Transmission Owner’s decision. PJM conducts a do no harm analysis to ensure the Supplemental Projects do not negatively affect the reliability of the system. Supplemental Projects are ultimately included in PJM’s Regional Transmission Expansion Plan and are allocated 100 percent to the zone in which the transmission facilities are located. Supplemental Projects may displace projects that would have otherwise been implemented through the RTEP process.

Supplemental projects are currently exempt from the Order No. 1000 competitive process.<sup>72</sup> Transmission owners have a clear incentive to increase investments in rate base given that transmission owners are paid for these projects on a cost of service basis.

Figure 12-5 shows the latest cost estimate of all baseline and supplemental projects by expected in service year. FERC Order No. 890 was issued on February 16, 2007, and implemented in PJM starting in 2008. Order No. 890 required Transmission Providers to participate in a coordinated, open and transparent planning process. Prior to the implementation of Order No.

<sup>71</sup> See PJM. Planning. “Transmission Construction Status.” (Accessed on June 30, 2022) <<http://www.pjm.com/planning/rtep-upgrades-status/construct-status.aspx>>.  
<sup>72</sup> FERC accepted tariff provisions that exclude supplemental projects from competition in the RTEP. 162 FERC ¶ 61,129 (2018), *reh’g denied*, 164 FERC ¶ 61,217 (2018).

890, there were transmission projects planned by transmission owners and included in the PJM planning models, that were not included in the totals shown in Figure 12-5, Table 12-53 and Table 12-54 because PJM did not track or report such projects. There has been a significant increase in supplemental projects coincident with the implementation of Order No. 890 starting in 2008 and the competitive planning process introduced by FERC Order No. 1000 starting in 2011.

**Figure 12-5 Cost estimate of baseline and supplemental projects by expected in service year: January 1, 1998 through December 31, 2022**

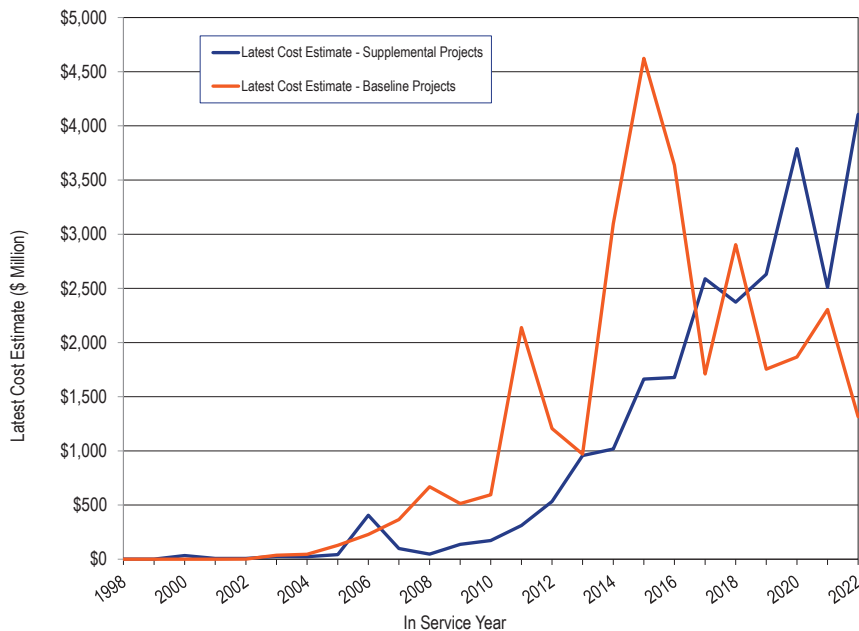


Table 12-53 shows the number of supplemental projects by expected in service year for each transmission zone. The average number of supplemental projects in each expected in service year increased by 870.0 percent, from 20 for years 1998 through 2007 (pre Order No. 890) to 194 for years 2008 through 2022 (post Order No. 890). As of June 30, 2022, there are 1,670 supplemental projects with expected in service dates within the next five years.

Table 12-53 Number of supplemental projects by expected in service year and zone: 1998 through 2040

Year	ACEC	AEP	APS	ATSI	BGE	COMED	DAY	DUKE	DUQ	DOM	DPL	EKPC	JCPLC	MEC	NEET	OVEC	PECO	PE	PEPCO	PPL	PSEG	REC	Total
1998	0	0	0	0	0	0	0	0	0	0	3	0	0	0	0	0	0	0	0	0	0	0	3
1999	0	0	0	0	0	0	0	0	0	0	2	0	0	0	0	0	0	0	0	0	0	0	2
2000	0	0	0	0	0	0	0	0	0	0	11	0	0	0	0	0	0	0	0	0	0	0	11
2001	0	0	0	0	0	0	0	0	0	0	14	0	0	0	0	0	0	0	0	0	0	0	14
2002	0	0	0	0	0	0	0	0	0	0	10	0	0	0	0	0	0	0	0	0	0	0	10
2003	3	0	0	0	0	0	0	0	0	0	10	0	0	0	0	0	0	2	0	0	0	0	15
2004	5	0	10	0	0	9	0	0	0	0	12	0	2	0	0	0	0	0	0	0	2	0	40
2005	4	2	8	0	0	4	0	0	0	1	14	0	1	0	0	0	1	2	0	0	2	0	39
2006	4	2	5	0	0	6	0	0	0	0	9	0	1	0	0	0	0	1	0	2	1	0	31
2007	1	1	5	0	4	5	0	0	4	0	6	0	0	0	0	0	0	2	0	1	6	0	35
2008	3	0	15	0	1	6	0	0	1	7	3	0	0	1	0	0	0	0	0	3	1	0	41
2009	3	1	6	0	1	8	0	0	3	3	5	0	0	0	0	0	5	1	0	1	2	0	39
2010	0	6	7	0	3	4	0	0	6	3	0	0	1	2	0	0	2	0	0	3	5	0	42
2011	0	8	8	0	0	2	0	0	5	2	0	0	1	0	0	0	4	0	0	6	4	0	40
2012	0	5	6	4	1	2	0	7	3	16	1	0	2	0	0	0	1	0	0	5	11	0	64
2013	5	21	4	5	0	11	0	6	4	13	1	0	1	1	0	0	1	0	1	14	19	0	107
2014	2	31	2	8	2	14	0	5	6	18	3	3	2	0	0	0	1	2	0	9	16	0	124
2015	4	15	2	9	1	37	0	8	4	17	5	3	2	0	0	0	1	0	4	7	24	0	143
2016	6	17	4	17	0	26	0	6	2	13	4	2	0	1	0	0	3	2	3	11	30	0	147
2017	8	107	3	26	1	23	0	3	8	31	11	5	0	3	0	0	0	3	1	22	43	0	298
2018	10	143	3	13	1	20	0	14	3	22	6	4	0	0	0	0	2	0	1	20	26	0	288
2019	3	158	4	30	5	14	2	16	1	33	8	5	3	14	0	0	1	15	0	15	27	0	354
2020	5	124	4	33	6	12	5	13	1	30	2	6	10	17	0	0	3	35	1	17	22	0	346
2021	4	131	6	31	5	3	7	13	2	22	1	7	9	21	0	0	19	24	0	19	21	0	345
2022	2	286	8	37	2	9	6	7	1	37	1	6	10	47	0	0	6	36	1	17	18	0	537
2023	6	247	3	23	0	4	18	5	1	27	4	5	1	29	2	5	3	32	2	14	30	0	461
2024	6	160	0	11	0	4	11	2	0	16	4	3	14	29	0	0	0	45	2	15	10	0	332
2025	4	112	1	11	3	0	7	1	0	26	3	1	0	23	0	0	0	30	1	7	19	0	249
2026	5	19	0	7	8	1	0	3	0	19	4	2	1	5	0	0	0	2	0	8	7	0	91
2027	1	26	0	4	1	0	0	2	2	0	1	1	0	1	0	0	0	0	0	5	0	0	44
2028	0	16	0	0	0	0	0	2	1	1	1	2	0	0	0	0	0	1	0	11	0	0	35
2029	0	0	0	0	4	0	0	0	0	0	0	0	0	0	0	0	0	2	0	15	0	0	21
2030	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	7	0	0	7
2031	0	0	0	1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	14	0	0	15
2032	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1	0	0	1
2033	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
2034	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
2035	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
2036	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
2037	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
2038	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
2039	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
2040	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
Total	94	1,638	114	270	49	224	56	113	58	357	159	55	61	194	2	5	53	237	17	269	346	0	4,371



## End of Life Transmission Projects

An end of life transmission project is a project submitted for the purpose of replacing existing infrastructure that is at, or is approaching, the end of its useful life. Under the current process, end of life transmission projects are not subject to the RTEP open window process and have become a form of supplemental project that is exempt from competition under the existing rules.<sup>73</sup>

The MMU recommends, to increase the role of competition, that the exemption of end of life projects from the Order No. 1000 competitive process be terminated and that end of life transmission projects be included in the RTEP process and should be subject to a transparent, robust and clearly defined mechanism to permit competition to build such projects.

## Competitive Planning Process Exclusions

There are several project types that are currently exempt from the competitive planning process. These project types include:

- **Immediate Need Exclusion.** Due to the immediate need of the violation (3 years or less), the timing required for an RTEP proposal window is defined to be infeasible and such projects are excluded from competition. As a result, the local Transmission Owner is the Designated Entity.<sup>74</sup> On October 17, 2019, the Commission issued an Order Instituting Section 206 Proceedings to determine if RTOs have implemented the exemption in a manner consistent with the Commission's directives under Order 1000.<sup>75</sup> Some supplemental projects are in this category.
- **Below 200kV.** Due to the lower voltage level of the identified violation(s), the driver(s) for this project are excluded from competition. As a result, the local Transmission Owner is the Designated Entity.<sup>76</sup> Some supplemental projects are in this category.

<sup>73</sup> In recent decisions addressing competing proposals on end of life projects, the Commission accepted a transmission owner proposal excluding end of life projects from competition in the RTEP process, 172 FERC ¶ 61,136 (2020), *reh'g denied*, 173 FERC ¶ 61,225 (2020), and rejected a proposal from PJM stakeholders that would have included end of life projects in competition in the RTEP process, 173 FERC ¶ 61,242 (2020).

<sup>74</sup> See OA Schedule 6 § 1.5.8(m).

<sup>75</sup> 169 FERC ¶ 61,054 (2019).

<sup>76</sup> See OA Schedule 6 § 1.5.8(n).

- **Substation Equipment.** Due to identification of the limiting element(s) as substation equipment, such projects are excluded from competition. As a result, the local Transmission Owner is the Designated Entity.<sup>77</sup> Some supplemental projects are in this category.

While the PJM Operating Agreement defines who will be the Designated Entity for projects that are excluded from the competitive planning process, neither the PJM Operating Agreement nor the various commission orders on transmission competition prohibit PJM from permitting competition to provide financing for such projects. The MMU recommends that rules be implemented to permit competition to provide financing for transmission projects. This competition could reduce the cost of capital for transmission projects and significantly reduce total costs to customers. In addition, the criteria for and need for all exclusions from the competitive process should be reviewed. There does not appear to be any market reason to exclude transmission projects from competition for any of these exclusion categories.

## Comparative Cost Framework

The MMU recommended that rules be implemented to require that project cost caps on new transmission projects be part of the evaluation of competing projects. On May 24, 2018, the PJM Markets and Reliability Committee (MRC) approved a motion that required PJM, with input from the MMU, to develop a comparative cost framework to evaluate the quality and effectiveness of binding cost containment proposals versus proposals without cost containment provisions. On March 20, 2020, the Commission approved PJM's filing to amend the PJM Operating Agreement to incorporate this requirement.<sup>78</sup>

The 2020 RTEP Window 1 was the first open window that received cost capping proposals to be evaluated under the comparative cost framework. PJM has not provided the requested data to the MMU to allow for an analysis of their financial review process. Without this analysis, the MMU cannot verify that the analysis performed under the comparative cost framework was sufficient or adequately followed the process defined in the PJM manual.<sup>79</sup>

<sup>77</sup> See OA Schedule 6 § 1.5.8(p).

<sup>78</sup> 170 FERC ¶ 61,243 (2020).

<sup>79</sup> See "PJM Manual 14F: Competitive Planning Process," Rev. 9 (April 27, 2022).

The existing proposal templates do not provide enough information to adequately perform a financial analysis. The MMU recommends that PJM modify the project proposal templates to include data necessary to perform a detailed project lifetime financial analysis. The required data includes, but is not limited to: capital expenditure; capital structure; return on equity; cost of debt; tax assumptions; ongoing capital expenditures; ongoing maintenance; and expected life.

## Storage As A Transmission Asset (SATA)

The PJM Planning Committee is currently considering whether storage devices should be included in the RTEP process as transmission assets.<sup>80</sup>

Transmission and generation have, and have always had, a symbiotic relationship in the provision of wholesale power. Transmission needs generation to function and generation needs transmission to function. Transmission can substitute for generation at the margin and generation can substitute for transmission at the margin. This relationship has always been a relatively unexamined area in the design of competitive wholesale power markets. For example, there is little if any explicit consideration of the impact of transmission planning on competitive generation investment in RTO/ISO market rules. Improvement is needed in these areas. Introducing confusion about what assets are classified as generation and what assets are classified as transmission frustrates potential reform and undermines the competitive markets.

On July 22, 2020, through the supplemental planning process, American Electric Power Service Corporation (AEP) filed, on behalf of Kentucky Power Company (Kentucky Power), a Petition for Declaratory Order seeking confirmation that its Middle Creek energy storage project is eligible for cost-of-service recovery through AEP's formula rates.<sup>81</sup> AEP's Middle Creek energy storage project was a proposed battery storage device that would discharge energy to serve retail load at the Middle Creek substation in the event of a transmission outage. On December 21, 2020, the Commission ruled that the

<sup>80</sup> See PJM, "Storage As A Transmission Asset: Problem / Opportunity Statement," <<https://pjm.com/-/media/committees-groups/committees/pc/2020/20200605-special/20200605-item-02a-storage-as-a-transmission-asset-problem-statement-clean.ashx>>.

<sup>81</sup> See AEP, Docket No. EL20-58 (July 22, 2020).

Middle Creek energy storage project did not perform a transmission function, and was ineligible to recover its costs through formula rates.<sup>82</sup>

Storage devices like batteries that are defined to be part of PJM markets should not be treated as transmission assets. The MMU recommends that storage resources not be includable as transmission assets for any reason.

## Board Authorized Transmission Upgrades

The Transmission Expansion Advisory Committee (TEAC) regularly reviews internal and external proposals to improve transmission reliability throughout PJM. These proposals, which include reliability baseline, network, market efficiency and targeted market efficiency projects, as well as scope changes and project cancellations, but exclude supplemental and end of life projects, are periodically presented to the PJM Board of Managers for authorization.<sup>83</sup>

An RTEP project can be approved by the PJM Board if the project ensures compliance with NERC, regional and local transmission owner planning criteria or to address market efficiency congestion relief. These projects are considered Baseline Projects. PJM Board approved RTEP projects that are necessary to allow new generation to interconnect reliably are considered Network Projects.

In the first six months of 2022, the PJM Board approved a net change of \$515.4 million in transmission upgrades. As of June 30, 2022, the PJM Board had approved \$39.4 billion in transmission system enhancements since 1999. On February 18, 2022, the PJM Board authorized an additional \$515.4 million in transmission upgrades and additions.

## Qualifying Transmission Upgrades (QTU)

A Qualifying Transmission Upgrade (QTU) is an upgrade to the transmission system that increases the Capacity Emergency Transfer Limit (CETL) into an LDA and can be offered into capacity auctions as capacity. Once a QTU is in service, the upgrade is eligible to continue to offer the approved incremental import capability into future RPM Auctions.

<sup>82</sup> 173 FERC ¶ 61,264 (2020).

<sup>83</sup> Supplemental Projects, including the end of life subset of supplemental projects, do not require PJM Board of Managers authorization.

If a QTU that was cleared in a Base Residual Auction (BRA) or Incremental Auction (IA) is not completed by the start of the Delivery Year, the submitting party is required to provide replacement capacity. Once a QTU is in service, the upgrade is eligible to continue to offer the approved incremental import capability into future RPM Auctions. As of June 30, 2022, no QTUs have cleared a BRA or IA.

## Cost Allocation

In response to complaints against PJM RTEP Baseline Upgrade Filings in 2014 that included cost allocations for \$1.5 billion in baseline transmission enhancements and expansions, on November 24, 2015, FERC issued an order directing investigation of “whether there is a definable category of reliability projects within PJM for which the solution-based DFAX cost allocation method may not be just and reasonable, such as projects addressing reliability violations that are not related to flow on the planned transmission facility, and whether an alternative just and reasonable *ex ante* cost allocation method could be established for any such category of projects.”<sup>84</sup> FERC convened a technical conference on January 12, 2016, to address the complaints in multiple proceedings and to address these two core issues.<sup>85</sup>

The issues identified in the complaints and at the technical conference included: whether the solutions based allocation method is appropriate for upgrades not related to transmission overload issues; whether the solutions based allocation method correctly identifies all the beneficiaries of the upgrades; whether it is reasonable to allocate a level of costs to a merchant transmission project that could force bankruptcy; and whether the significant shifts in allocation that result from use of the 0.01 distribution factor cutoff are appropriate.

On February 20, 2020, the Commission issued an Order denying rehearing requests.<sup>86</sup> The Commission found that PJM’s solution based dfax method for regional cost allocation, including the 0.01 distribution cutoff factor, is just and reasonable. An appeal of this case currently is pending at the U.S. Court of Appeals for the D.C. Circuit.<sup>87</sup>

<sup>84</sup> 153 FERC ¶ 61,245 at P 35 (2015).

<sup>85</sup> See Docket Nos. EL15-18-000 (ConEd), EL15-67-000 (Linden), and EL15-95-000 (Artificial Island).

<sup>86</sup> 170 FERC ¶ 61,122 (2020).

<sup>87</sup> See *New York Power Authority, et al v. FERC*, 20-1074.

It is clear that the allocation issues are difficult. Nonetheless, the allocation methods affect the efficiency of the markets and the incentives for merchant transmission owners to compete to build new transmission. The MMU recommends a comprehensive review of the ways in which the solution based dfax is implemented. The goal for such a process would be to ensure that the most rational and efficient approach to implementing the solution based dfax method is used in PJM. Such an approach should allocate costs consistent with benefits and appropriately calibrate the incentives for investment in new transmission capability. No replacement approach should be approved until all potential alternatives, including the status quo, are thoroughly reviewed.

As an example, the use of the arbitrary 0.01 distribution factor cutoff can result in large and inappropriate shifts in cost allocation. If the intent of the use of the 0.01 cutoff is to help eliminate small, arbitrary cost allocations to geographically distant areas, this could be achieved by adding a threshold for a minimum usage impact on the line. The MMU recommends consideration of changing the minimum distribution factor in the allocation from 0.01 to 0.00 and adding a threshold minimum impact on the load on the line based on a complete analysis of the intent of the allocation and the impacts of the allocation.

## Transmission Line Ratings

Transmission line ratings, and more broadly transmission facility ratings, are the metric for the ability of transmission lines to transmit power from one point to another. Transmission line ratings have significant and frequently underappreciated impacts on competitive wholesale power markets like PJM. These include direct impacts on energy and capacity prices, the frequency and level of congestion in the day-ahead and real-time energy market, day-ahead nodal price differences and the associated value of FTRs, locational price differences in the capacity market, the need to invest in additional transmission capacity, the need to invest in additional generation capacity, the location of new power plants, and the interconnection costs for new power plants. The impact of transmission facility ratings on markets is a function both of the line ratings directly and the use of those ratings by the RTO/ISO.

Congestion payments by load result when lower cost generation is not available to meet all the load in an area as a result of limits on the transmission system. When higher cost local generation is needed to meet part of the local load because of transmission limits, 100 percent of the local load pays the higher price while only the local generation receives the higher price. The difference between what the load pays and generators receive is congestion. Since 2008, congestion costs in PJM have ranged from \$0.5 billion to \$2.05 billion per year. Congestion costs were significantly higher during extreme winter weather conditions such as January 2014, when the congestion costs in PJM were \$825.1 million for one month.<sup>88</sup>

LMP may, at times, be set by transmission penalty factors. When a transmission constraint is binding and there are no generation alternatives to resolve the constraint, system operators may allow the transmission limit to be violated. When this occurs, the shadow price of the constraint is set by transmission penalty factors. The shadow price directly affects the LMP. Transmission penalty factors are administratively determined and can be thought of as a form of locational scarcity pricing. Transmission penalty factors were fully implemented in PJM pricing effective February 1, 2019. The default transmission penalty factor is \$2,000 per MWh.

Transmission line ratings can result in short term, significant increases in prices as a result of the application of transmission penalty factors. For example, violation of a transmission constraint, meaning that the flow exceeds the line limit, generally results in at least a \$2,000 per MWh price. As the power flows approach their rated limits, PJM dispatchers often reduce the limits.<sup>89</sup> Violation of these reduced line ratings results in penalty factors setting prices. In 2021, there were 170,067 transmission constraint intervals in the real-time market with a nonzero shadow price. For nearly eight percent of these transmission constraint intervals, the line limit was violated, meaning that the flow exceeded the facility limit. In 2021, the average shadow price

of transmission constraints when the line limit was violated was nearly 8.8 times higher than when the transmission constraint was binding at its limit.<sup>90</sup>

Capacity market prices separate locally when transmission capability into Locational Deliverable Areas (LDA) is not adequate to meet the LDA capacity requirement with the lowest cost capacity. The available transmission capability into LDAs is defined as the Capacity Emergency Transfer Limit (CETL). Higher cost LDAs are the equivalent in the capacity market of congestion in the energy market. Load in the higher cost LDAs pay more for capacity than those in lower cost LDAs. For example, the clearing price for the BGE LDA in the 2021/2022 Base Residual Auction was \$200.30 per MW-day. The clearing price for the EMAAC LDA was \$165.73 per MW-day.<sup>91</sup>

Transmission line ratings for a given transmission facility vary by the duration of the power flow, by ambient temperatures, by wind speed and by other conditions. Transmission lines can operate with higher loads for shorter periods of time. This is significant when a contingency is expected to last for only a short period. The transmission line rating can mean the difference between substantial congestion costs and no congestion costs. The transmission line rating can mean the difference between a transmission penalty factor and no penalty factor.

In PJM, transmission owners use a range of ratings by duration.<sup>92</sup> PJM requires transmission owners to provide thermal ratings under normal operating conditions, long term emergency operating conditions, short term emergency operating conditions and the extreme load dump conditions. But there is no requirement that the ratings differ for these operating conditions. PJM typically uses normal line ratings for precontingency (base case) constraints and long term emergency line ratings (four hours) for contingency constraints. PJM requires transmission owners to provide temperature based line ratings separately for night and day times. The temperature ranges from 32 degree Fahrenheit or below to 95 degree Fahrenheit or above in nine degree increments. But there is no requirement that the ratings differ

<sup>88</sup> See the *2018 State of the Market Report for PJM*, Volume II, Section 11: Congestion and Marginal Losses.

<sup>89</sup> See "Transmission Constraint Control Logic and Penalty Factors," presented at May 10, 2018 meeting of the Markets Implementation Committee Special Session Transmission Constraint Penalty Factors at p14. <<https://www.pjm.com/-/media/committees-groups/committees/mic/20180510-special/20180510-item-03-transmission-constraint-penalty-factor-education.ashx>>.

<sup>90</sup> See the *2020 State of the Market Report for PJM*, Volume II, Section 3: Energy Market.

<sup>91</sup> See the "Analysis of the 2021/2022 RPM Base Residual Auction," <[https://www.monitoringanalytics.com/reports/Reports/2018/IMM\\_Analysis\\_of\\_the\\_20212022\\_RPM\\_BRA\\_Revised\\_20180824.pdf](https://www.monitoringanalytics.com/reports/Reports/2018/IMM_Analysis_of_the_20212022_RPM_BRA_Revised_20180824.pdf)> (August 24, 2018).

<sup>92</sup> See "PJM Manual 3: Transmission Operations," Rev. 62 (June 1, 2022) § 2.1.1, at p 27.



for these operating condition temperatures. In PJM, transmission owners are responsible for developing their own methods to compute line ratings subject to a range of NERC guidelines and requirements. PJM does not review or verify the accuracy of transmission owners' methods to compute line ratings. In PJM, transmission owners have substantial discretion in the approach to line ratings.<sup>93</sup>

Given the significant impact of transmission line ratings on all aspects of wholesale power markets, ensuring and improving the accuracy and transparency of line ratings is essential. Line ratings should incorporate ambient temperature conditions, wind speed and other relevant operating conditions. PJM real-time prices are calculated every five minutes for thousands of nodes. PJM prices are extremely sensitive to transmission line ratings. For consistency with the dynamic nature of wholesale power markets, line ratings should be updated in real time to reflect real time conditions and to help ensure that real-time prices are based on actual current line ratings. New technologies that permit dynamic line ratings (DLR) should be implemented.

Line ratings determine the actual value of transmission in market operations. Yet the methods for defining line ratings remain opaque and vary significantly across transmission owners. Under defining line ratings results in over building transmission. Over defining line ratings results in less reliability than planned for. Dynamic line ratings are essential to reflect the actual availability of transmission in real time as ambient conditions change. Ensuring that system operators have accurate information about line ratings, including a wide range of line ratings by duration of load, are essential to ensure that all market participants receive the maximum value from the investment in the transmission system.

Given the significant impact of transmission line ratings on all aspects of wholesale power markets, ensuring and improving the accuracy and transparency of line ratings is essential. Line ratings should incorporate ambient temperature conditions, wind speed and other relevant operating conditions. In PJM, real-time prices are calculated every five minutes for

<sup>93</sup> PJM presentation to the Planning Committee (PC) (May 3, 2018) "Transmission Owner Ratings Development and Reporting in PJM" ("There are no requirements for PJM to approve or verify a TO's ratings or do any kind of consistency check.") at 24.

thousands of nodes. PJM prices are extremely sensitive to transmission line ratings.

The MMU recommends that all PJM transmission owners use the same methods to define line ratings and implement dynamic line ratings (DLR), subject to NERC standards and guidelines, subject to review by NERC, PJM and the MMU, and approval by FERC. The same facilities should have the same basic ratings under the same operating conditions regardless of the transmission owner. Transmission owner discretion should be minimized or eliminated. The line rating methods should be based on the basic engineering facts of the transmission system components and reflect the impact of actual operating conditions on the ratings of transmission facilities, including ambient temperatures and wind speed when relevant.<sup>94</sup> The line rating methods should be public and fully transparent.

The MMU recommends that PJM routinely review all transmission facility ratings and any changes to those ratings to ensure that the normal, emergency and load dump ratings used in modeling the transmission system are accurate and reflect standard ratings practice.<sup>95</sup> All line rating changes and the detailed reasons for those changes should be public and fully transparent.

The Commission recently adopted rules that enhance the ability of PJM and the MMU to understand and monitor line ratings on the PJM grid. Order No. 881, issued December 16, 2021, requires that: transmission providers implement ambient-adjusted ratings on transmission lines; RTOs/ISOs implement the systems and procedures necessary for hourly ratings updates; transmission providers use uniquely determined emergency ratings; transmission owners share transmission line ratings and transmission line rating methods with RTOs/ISOs and market monitors; transmission providers maintain a database of transmission line ratings and transmission line rating methods on OASIS or other password-protected website.<sup>96 97</sup>

<sup>94</sup> See "Transmission Owner Ratings Development and Reporting in PJM," presented at May 3, 2018 meeting of the Planning Committee.

<sup>95</sup> See the 2018 State of the Market Report for PJM, Volume II, Section 2: Recommendations.

<sup>96</sup> *Managing Transmission Line Ratings*, Order No. 881, 177 FERC ¶ 61,179 at P 39 (2021) ("Order No. 881"), order on reh'g, Order No. 881-A, 179 FERC ¶ 61,125 (2022) ("Order No. 881-A").

<sup>97</sup> See 18 CFR § 35.28(c)(5)(e)(g)(13).

On rehearing, the Commission provided clarification of market monitors' ability to take action based on information received about transmission line ratings: "We expect that market monitors may use the transmission line rating information available to them in furtherance of their existing responsibilities, which are set forth in the Commission's regulations and the relevant tariffs of each RTO/ISO."<sup>98</sup>

Order No. 881 enhances transparency of information on line ratings and how they are determined. Requiring ambient and hourly adjustments constitutes substantive improvement. Continued reform consistent with the MMU's recommendations is needed in order to ensure consistent and accurate transmission line ratings in PJM.

Order No. 881 did not require the use of dynamic line ratings ("DLR") based on an insufficient record.<sup>99</sup> But on February 17, 2022, in Docket No. AD22-5, FERC issued a notice of inquiry addressing the DLR issues.<sup>100</sup>

## Dynamic Line Ratings (DLR) and GETs

For consistency with the dynamic nature of wholesale power markets, line ratings should be updated in real time to reflect real time conditions and to help ensure that real time prices are based on actual current line ratings. The relevant real-time conditions include ambient air temperature, wind speeds, solar heating, transmission line tension, and transmission line sag. The widespread adoption of dynamic line ratings should be pursued. The adoption of dynamic line ratings does not require the exorbitant incentives proposed by some. Dynamic line rating technology and other Grid Enhancing Technology (GET) should be subject to competition and the costs of implementation should be capped at the costs that would result from the current cost of service method applied to transmission owners. The proposal that providers of GET should receive a share of forecast benefits is not consistent with competition, would pay rates of return many multiples of market rates of return and suffers from the same intractable problem of defining speculative benefits for long periods.

<sup>98</sup> Order No. 881-A at P 91.

<sup>99</sup> Order No. 881 at PP 25, 254

<sup>100</sup> *Implementation of Dynamic Line Ratings*, Notice of Inquiry, 178 FERC ¶ 61,110 (2022).

## Transmission Facility Outages Scheduling Transmission Facility Outage Requests

A transmission facility is designated as reportable by PJM if a change in its status can affect a transmission constraint on any Monitored Transmission Facility or could impede free flowing ties within the PJM RTO and/or adjacent areas.<sup>101</sup> When a reportable transmission facility needs to be taken out of service, the transmission owner is required to submit an outage request as early as possible.<sup>102</sup> The specific timeline is shown in Table 12-56.<sup>103</sup>

Transmission outages have significant impacts on PJM markets, including impacts on FTR auctions, on congestion, and on expected market outcomes in the day-ahead and real-time markets. The efficient functioning of the markets depends on clear, enforceable rules governing transmission outages.

The outage data for the FTR market are for outages scheduled to occur in the 2020/2021 planning period and the 2021/2022 planning period, regardless of when they were initially submitted.<sup>104</sup> The outage data for the day-ahead market are for outages scheduled to occur from January 2015 through June 2022.

Transmission outages are categorized by duration: greater than 30 calendar days; less than or equal to 30 calendar days; greater than five calendar days; less than or equal to five calendar days.<sup>105</sup> Table 12-55 shows that 77.3 percent of requested outages were planned for less than or equal to five days and 8.0 percent of requested outages were planned for greater than 30 days in 2021/2022 planning period. Table 12-55 also shows that 78.0 percent of the requested outages were planned for less than or equal to five days and 7.6 percent of requested outages were planned for greater than 30 days in the 2020/2021 planning period.

<sup>101</sup> If a transmission facility is not modeled in the PJM EMS or the facility is not expected to significantly impact PJM system security or congestion management, it is not reportable. See PJM, "Manual 3: Transmission Operations," Rev. 62 (June 1, 2022).

<sup>102</sup> See PJM, "Manual 3: Transmission Operations," Rev. 62 (June 1, 2022).

<sup>103</sup> See PJM, "Manual 3: Transmission Operations," Rev. 62 (June 1, 2022).

<sup>104</sup> The hotline tickets, EMS tripping tickets or test outage tickets were excluded. The analysis includes only the transmission outage tickets submitted by PJM companies which are currently active.

<sup>105</sup> *Id.* at 70.

**Table 12-55 Transmission facility outage request summary by planned duration: June 2020 through May 2022**

Planned Duration (Days)	2020/2021		2021/2022	
	Outage Requests	Percent of Total	Outage Requests	Percent of Total
<=5	16,125	78.0%	15,187	77.3%
>5 &lt; =30	2,969	14.4%	2,872	14.6%
>30	1,580	7.6%	1,578	8.0%
Total	20,674	100.0%	19,637	100.0%

After receiving a transmission facility outage request from a TO, PJM assigns a received status to the request based on its submission date and outage planned duration. The received status can be On Time or Late, as defined in Table 12-56.<sup>106</sup>

The purpose of the rules defined in Table 12-56 is to require the TOs to submit transmission facility outages prior to the Financial Transmission Right (FTR) auctions so that market participants have complete information about market conditions on which to base their FTR bids and PJM can accurately model market conditions.<sup>107</sup>

**Table 12-56 Transmission facility outage request received status definition**

Planned Duration (Calendar Days)	Request Submitted	Received Status
<=5	Before the first of the month one month prior to the starting month of the outage	On Time
	After or on the first of the month one month prior to the starting month of the outage	Late
> 5 &lt; =30	Before the first of the month six months prior to the starting month of the outage	On Time
	After or on the first of the month six months prior to the starting month of the outage	Late
>30	The earlier of 1) February 1, 2) the first of the month six months prior to the starting month of the outage	On Time
	After or on the earlier of 1) February 1, 2) the first of the month six months prior to the starting month of the outage	Late

<sup>106</sup> See PJM, "Manual 3: Transmission Operations," Rev. 62 (June 1, 2022).

<sup>107</sup> See "Report of PJM Interconnection, L.L.C. on Transmission Oversight Procedures," Docket No. EL01-122-000 (November 2, 2001).

Table 12-57 shows a summary of requests by received status. In 2021/2022 planning period, 40.1 percent of outage requests received were late. In the 2020/2021 planning period, 41.4 percent of outage requests received were late.

**Table 12-57 Transmission facility outage requests by received status: June 2020 through May 2022**

Planned Duration (Days)	2020/2021			2021/2022			
	On Time	Late	Total	Percent On Time	Percent Late	Total	Percent Late
<=5	9,912	6,213	16,125	38.5%	38.5%	9,607	36.7%
>5 &lt; =30	1,577	1,392	2,969	46.9%	46.9%	1,557	45.8%
>30	632	948	1,580	60.0%	60.0%	600	62.0%
Total	12,121	8,553	20,674	41.4%	41.4%	11,764	40.1%

Once received, PJM processes outage requests in priority order: emergency transmission outage request; transmission outage request submitted on time; and transmission outage request submitted late. Transmission outage requests that are submitted late may be approved if the outage does not affect the reliability of PJM or cause congestion in the system.<sup>108</sup>

Outages with emergency status will be approved even if submitted late after PJM determines that the outage does not result in Emergency Procedures. PJM cancels or withholds approval of any outage that results in Emergency Procedures.<sup>109</sup> Table 12-58 is a summary of outage requests by emergency status. Of all outage requests scheduled to occur in 2021/2022 planning period, 12.1 percent were for emergency outages. Of all outage requests scheduled to occur in the 2020/2021 planning period, 12.2 percent were for emergency outages.

<sup>108</sup> See PJM, "Manual 3: Transmission Operations," Rev. 62 (June 2, 2022). The following language was removed from Manual 3 Rev. 50: PJM retains the right to deny all jobs submitted after 8 a.m. three days prior to the requested start date unless the request is an emergency job or an exception request (i.e. a generator tripped and the Transmission Owner is taking advantage of a situation that was not available before the unit trip).

<sup>109</sup> PJM, "Manual 3: Transmission Operations," Rev. 62 (June 1, 2022).

**Table 12-58 Transmission facility outage requests by emergency: June 2020 through May 2022**

Planned Duration (Days)	2020/2021				2021/2022			
	Emergency	Non Emergency	Total	Percent Emergency	Emergency	Non Emergency	Total	Percent Emergency
<=5	1,821	14,304	16,125	11.3%	1,749	13,438	15,187	11.5%
>5 &lt;=30	451	2,518	2,969	15.2%	357	2,515	2,872	12.4%
>30	251	1,329	1,580	15.9%	267	1,311	1,578	16.9%
Total	2,523	18,151	20,674	12.2%	2,373	17,264	19,637	12.1%

PJM will approve all transmission outage requests that are submitted on time and do not jeopardize the reliability of the PJM system. PJM will approve all transmission outage requests that are submitted late and are not expected to cause congestion on the PJM system and do not jeopardize the reliability of the PJM system. Each outage is studied and if it is expected to cause a constraint to exceed a limit, PJM will flag the outage ticket as “congestion expected.”<sup>110</sup>

After PJM determines that a late request may cause congestion, PJM informs the transmission owner of solutions available to eliminate the congestion. For example, if a generator planned or maintenance outage request is contributing to the congestion, PJM can request that the generation owner defer the outage. If no solutions are available, PJM may require the transmission owner to reschedule or cancel the outage.

Table 12-59 is a summary of outage requests by congestion status. Of all outage requests submitted to occur in 2021/2022 planning period, 6.3 percent were expected to cause congestion. Of all the outage requests that were expected to cause congestion, 3.8 percent (47 out of 1,236) were denied by PJM in 2021/2022 planning period and 19.6 percent (242 out of 1,236) were cancelled (Table 12-61). Of all outage requests submitted to occur in the 2020/2021 planning period, 6.3 percent were expected to cause congestion. Of all the outage requests that were expected to cause congestion, 1.6 percent (21 out of 1,296) were denied by PJM in the 2020/2021 planning period and 19.4 percent (251 out of 1,296) were cancelled (Table 12-61).

<sup>110</sup> PJM added this definition to Manual 38 in February 2017. PJM, “Manual 38: Operations Planning,” Rev. 15 (Jan. 26, 2022).

**Table 12-59 Transmission facility outage requests by congestion: June 2020 through May 2022**

Planned Duration (Days)	2020/2021				2021/2022			
	Congestion Expected	No Congestion Expected	Total	Percent Congestion Expected	Congestion Expected	No Congestion Expected	Total	Percent Congestion Expected
<=5	945	15,180	16,125	5.9%	918	14,269	15,187	6.0%
>5 &lt;=30	246	2,723	2,969	8.3%	211	2,661	2,872	7.3%
>30	105	1,475	1,580	6.6%	107	1,471	1,578	6.8%
Total	1,296	19,378	20,674	6.3%	1,236	18,401	19,637	6.3%

Table 12-60 shows the outage requests summary by received status, congestion status and emergency status. In 2021/2022 planning period, 28.3 percent of requests were submitted late and were nonemergency while 1.1 percent of requests (221 out of 19,637) were late, nonemergency, and expected to cause congestion. In the 2020/2021 planning period, 29.3 percent of request were submitted late and were nonemergency while 1.0 percent of requests (203 out of 20,674) were late, nonemergency, and expected to cause congestion.

**Table 12-60 Transmission facility outage requests by received status, emergency and congestion: June 2020 through May 2022**

Received Status	2020/2021				2021/2022			
	Congestion Expected	No Congestion Expected	Total	Percent of Total	Congestion Expected	No Congestion Expected	Total	Percent of Total
Late Emergency	71	2,415	2,486	12.0%	56	2,261	2,317	11.8%
Non Emergency	203	5,864	6,067	29.3%	221	5,335	5,556	28.3%
On Time Emergency	2	35	37	0.2%	8	48	56	0.3%
Non Emergency	1,020	11,064	12,084	58.5%	951	10,757	11,708	59.6%
Total	1,296	19,378	20,674	100.0%	1,236	18,401	19,637	100.0%

Once PJM processes an outage request, the outage request is labelled as Submitted, Received, Denied, Approved, Cancelled by Company, PJM Admin Closure, Revised, Active or Complete according to the processed stage of a request.<sup>111</sup> Table 12-61 shows the detailed process status for outage requests only for the outage requests that are expected to cause congestion. Status Submitted and status Received are in the In Process category and status Cancelled by Company and status PJM Admin Closure are in the Cancelled category in Table 12-61. Table 12-61 shows that of all the outage requests that were expected to cause congestion, 3.8 percent (47 out of 1,236) were denied by PJM in 2021/2022 planning period, 67.5 percent were complete and 19.6 percent (242 out of 1,236) were cancelled. Of all the outage requests that were expected to cause congestion, 1.6 percent (21 out of 1,296) were denied by PJM in the 2020/2021 planning period, 72.1 percent were complete and 19.4 percent (251 out of 1,296) were cancelled.

**Table 12-61 Transmission facility outage requests by processed status: June 2020 through May 2022**

Received Status	2020/2021						2021/2022					
	Cancelled	Complete	In Process	Denied	Congestion Expected	Percent Complete	Cancelled	Complete	In Process	Denied	Congestion Expected	Percent Complete
Late Emergency	5	63	2	1	71	88.7%	7	47	0	1	56	83.9%
Non Emergency	33	148	9	10	203	72.9%	36	158	4	22	221	71.5%
On Time Emergency	0	2	0	0	2	100.0%	2	6	0	0	8	75.0%
Non Emergency	213	722	68	10	1,020	70.8%	197	623	94	24	951	65.5%
Total	251	935	79	21	1,296	72.1%	242	834	98	47	1,236	67.5%

<sup>111</sup> See PJM Markets & Operations, PJM Tools "Outage Information," <<http://www.pjm.com/markets-and-operations/etools/oasis/system-information/outage-info.aspx>> (2019).

<sup>112</sup> OA Schedule 1 § 1.9.2.

There are clear rules defined for assigning On Time or Late status for submitted outage requests in both the PJM tariff and PJM manuals.<sup>112</sup> However, the On Time or Late status only affects the priority that PJM assigns for processing the outage request. Table 12-61 shows that in the 2021/2022 planning period, 221 nonemergency outage requests were submitted late and expected to cause congestion. The expected impact on congestion is the basis for PJM's treatment of late outage requests. But there is no rule or clear definition of this congestion analysis in the PJM manuals.

The MMU recommends that PJM draft a clear definition of the congestion analysis required for transmission outage requests to include in Manual 3 after appropriate review.

The treatment by PJM and Dominion Virginia Power of the outage for the Lanexa - Dunnsville Line illustrates some of the issues with the current process. The outage was submitted and delayed more than once. It is not clear that PJM's analysis of expected congestion identified or highlighted the magnitude of the issue. Dominion Virginia Power did not stage the outage so as to minimize market disruption and congestion. After high congestion costs of Greys Point - Harmony Village constraint and market participant manipulative behavior caused by the outage were identified by the end of January, on February 11, 2022 Dominion decided to temporarily terminate the outage in March in order to work on upgrading Greys Point, Harmony Village and White Stone path. The Greys Point - Harmony Village Line has not been binding since March 14, 2022. It indicates that if the market impact

of the outage was identified during PJM outage analysis process and action was taken because of the analysis result, the high congestion costs and manipulative behavior could have been prevented.

## Rescheduling Transmission Facility Outage Requests

A TO can reschedule or cancel an outage after initial submission. Table 12-62 is a summary of all the outage requests planned for the 2020/2021 planning period and 2021/2022 planning period which were approved and then cancelled or rescheduled by TOs at least once. If an outage request was submitted, approved and subsequently rescheduled at least once, the outage request will be counted as Approved and Rescheduled. If an outage request was submitted, approved and subsequently cancelled at least once, the outage request will be counted as Approved and Cancelled. In 2021/2022 planning period, 28.6 percent of transmission outage requests were approved by PJM and then rescheduled by the TOs, and 12.0 percent of the transmission outages were approved by PJM and subsequently cancelled by the TOs. In the 2020/2021 planning period, 30.4 percent of transmission outage requests were approved by PJM and then rescheduled by the TO, and 12.4 percent of the transmission outages were approved by PJM and subsequently cancelled by the TO.

**Table 12-62 Rescheduled and cancelled transmission outage requests: June 2020 through May 2022**

Planned Duration (Days)	Outage Requests	2020/2021				2021/2022				
		Approved and Rescheduled	Percent Approved and Rescheduled	Approved and Cancelled	Percent Approved and Cancelled	Outage Requests	Approved and Rescheduled	Percent Approved and Rescheduled	Approved and Cancelled	Percent Approved and Cancelled
<=5	16,125	3,552	22.0%	2,267	14.1%	15,187	3,070	20.2%	2,078	13.7%
>5 &lt;=30	2,969	1,688	56.9%	204	6.9%	2,872	1,500	52.2%	199	6.9%
>30	1,580	1,048	66.3%	84	5.3%	1,578	1,047	66.3%	88	5.6%
Total	20,674	6,288	30.4%	2,555	12.4%	19,637	5,617	28.6%	2,365	12.0%

If a requested outage is determined to be late and TO reschedules the outage, the outage will be reevaluated by PJM again as On Time or Late.

A transmission outage ticket with duration of five days or less with an On Time status can retain its On Time status if the outage is rescheduled within the original scheduled month.<sup>113</sup> This rule allows a TO to reschedule within the same month with very little notice.

A transmission outage ticket with a duration exceeding five days with an On Time status can retain its On Time status if the outage is rescheduled to a future month, and the revision is submitted by the first of the month prior to the revised month in which the outage will occur.<sup>114</sup> This rescheduling rule is much less strict than the rule that applies to the first submission of outage requests with similar duration. When first submitted, the outage request with a duration exceeding five days needs to be submitted before the first of the month six months prior to the month in which the outage was expected to occur. The rescheduling rule allows TOs to avoid the timing requirements associated with outages exceeding five days.

The MMU recommends that PJM reevaluate all transmission outage tickets as On Time or Late as if they were new requests when an outage is rescheduled and apply the standard rules for late submissions to any such outages.

<sup>113</sup> PJM, "Manual 3: Transmission Operations," Rev. 62 (Jan. 26, 2022).

<sup>114</sup> *Id.*

## Long Duration Transmission Facility Outage Requests

PJM rules (Table 12-56) define a transmission outage request as On Time or Late based on the planned outage duration and the time of submission. The rule has stricter submission requirements for transmission outage requests planned for longer than 30 days. In order to avoid the stricter submission requirement, some transmission owners divided the duration of outage requests longer than 30 days into shorter segments for the same equipment and submitted one request for each segment. The MMU recommends that PJM not permit transmission owners to divide long duration outages into smaller segments to avoid complying with the requirements for long duration outages.

More than one outage request can be submitted for the same transmission equipment. In order to accurately present the results, Table 12-63 shows equipment outages by the equipment instead of by outage request.

Table 12-63 shows that there were 12,198 transmission equipment planned outages in 2021/2022 planning period, of which 1,605 or 13.2 percent were longer than 30 days, and of which 238 or 2.0 percent were scheduled longer than 30 days when the duration of all the outage requests are combined for the same equipment.

**Table 12-63 Transmission equipment outages: June 2020 through May 2022**

Planned Duration (Days)	Divided into Shorter Periods	2020/2021		2021/2022	
		Count of Equipment with Planned Outages	Percent of Total	Count of Equipment with Planned Outages	Percent of Total
> 30	No	1,382	10.8%	1,367	11.2%
	Yes	239	1.9%	238	2.0%
<= 30		11,134	87.3%	10,593	86.8%
Total		12,755	100.0%	12,198	100.0%

Table 12-64 shows the details of long duration (> 30 days) outages when combining the duration of the outage requests for the same equipment.<sup>115</sup> The actual duration of scheduled outages would be longer than 30 days if the duration of the outage requests was appropriately combined for the same

<sup>115</sup> A transmission facility is modeled as equipment in the EMS model. Equipment has three identifiers: location (B1), voltage level (B2) and equipment name (B3). The types of equipment include, for example, lines, transformers, and capacitors. There can be multiple outage requests associated with the same equipment.

equipment. An effective duration was calculated for each piece of equipment by subtracting the start date of the earliest outage request from the end date of the latest outage request of the equipment. In 2021/2022 planning period, within effective duration greater than a month and shorter than two months, there were 29 outages with a combined duration longer than 30 days.

**Table 12-64 Transmission equipment outages by effective duration: June 2020 through May 2022**

Effective Duration of Outage	2020/2021		2021/2022	
	Count of Equipment with Planned Outages	Percent of Total	Count of Equipment with Planned Outages	Percent of Total
<=31	2	0.8%	3	1.3%
>31 &lt;=62	23	9.6%	29	12.2%
>62 &lt;=93	18	7.5%	20	8.4%
>93	196	82.0%	186	78.2%
Total	239	100.0%	238	100.0%

## Transmission Facility Outage Analysis for the FTR Market

Transmission facility outages affect the price and quantity outcomes of FTR Auctions. The purpose of the rules governing outage reporting is to ensure that outages are known with enough lead time prior to FTR Auctions so that market participants can understand market conditions and PJM can accurately model market conditions.

There are Long Term, Annual and Monthly Balance of Planning Period auctions in the FTR Market. For each type of auction, PJM includes a set of outages to be modeled.

### Annual FTR Market

The Annual FTR Market includes the Annual ARR Allocation and the Annual FTR Auction. When determining transmission outages to be modeled in the simultaneous feasibility test used in the Annual FTR Market, PJM considers all outages with planned duration longer than or equal to two weeks as an initial

list. Then PJM may exercise significant discretion in selecting outages to be modeled in the final model. PJM posts the final FTR outage list to the FTR web page usually at least one week before the auction bidding opening day.<sup>116</sup>

In 2021/2022 planning period, 367 outage requests were included in the annual FTR market outage list and 19,270 outage requests were not included.<sup>117</sup> In the 2020/2021 planning period, 321 outage requests were included in the annual FTR market outage list and 20,353 outage requests were not included. Table 12-65, Table 12-66, Table 12-67 and Table 12-68 show the summary information on the modeled outage requests and Table 12-69 and Table 12-70 show the summary information on outages that were not included in the Annual FTR Market.

Table 12-65 shows that 27.0 percent of the outage requests modeled in the Annual FTR Market for 2021/2022 planning period had a planned duration of less than two weeks and that 16.3 percent of the outage requests (60 out of 367) modeled in the Annual FTR Market for the planning period were submitted late according to outage submission rules. It also shows that 27.4 percent of the outage requests modeled in the Annual FTR Market for the 2020/2021 planning period had a planned duration of less than two weeks and that 16.5 percent of the outage requests (53 out of 321) modeled in the Annual FTR Market for the planning period were submitted late according to outage submission rules.

**Table 12-65 Annual FTR market modeled transmission facility outage requests by received status: June 2020 through May 2022**

Planned Duration	2020/2021				2021/2022			
	On Time	Late	Total	Percent of Total	On Time	Late	Total	Percent of Total
<2 weeks	76	12	88	27.4%	86	13	99	27.0%
>=2 weeks & <2 months	88	13	101	31.5%	128	16	144	39.2%
>=2 months	104	28	132	41.1%	93	31	124	33.8%
Total	268	53	321	100.0%	307	60	367	100.0%

Table 12-66 shows the annual FTR market modeled outage requests summary by emergency status and received status. None of the annual FTR market modeled outages expected to occur in 2021/2022 planning period were emergency outages. Two of the modeled outages expected to occur in the 2020/2021 planning period were emergency outages.

**Table 12-66 Annual FTR market modeled transmission facility outage requests by emergency: June 2020 through May 2022**

Received Status	Planned Duration	2020/2021				2021/2022			
		Emergency	Non Emergency	Total	Percent Non Emergency	Emergency	Non Emergency	Total	Percent Non Emergency
On Time	<2 weeks	0	76	76	100.0%	0	86	86	100.0%
	>=2 weeks & <2 months	0	88	88	100.0%	0	128	128	100.0%
	>=2 months	0	104	104	100.0%	0	93	93	100.0%
	Total	0	268	268	100.0%	0	307	307	100.0%
Late	<2 weeks	2	10	12	83.3%	0	13	13	100.0%
	>=2 weeks & <2 months	0	13	13	100.0%	0	16	16	100.0%
	>=2 months	0	28	28	100.0%	0	31	31	100.0%
	Total	2	51	53	96.2%	0	60	60	100.0%

<sup>116</sup> PJM Financial Transmission Rights, "Annual ARR Allocation and FTR Auction Transmission Outage Modeling," <<https://www.pjm.com/-/media/markets-ops/ftr/annual-ftr-auction/2018-2019/2018-2019-annual-outage-modeling.ashx?la=en>> (April 5, 2018). There is no documentation on the deadline for when modeling outages should be posted on the PJM website.

<sup>117</sup> PJM's treatment of transmission outages in the FTR models is discussed in the 2021 State of the Market Report for PJM: Section 13: FTRs and ARR: Supply and Demand.



PJM determines expected congestion for both On Time and Late outage requests. A Late outage request may be denied or cancelled if it is expected to cause congestion. Table 12-67 shows a summary of requests by expected congestion and received status. Of all the annual FTR market modeled outages expected to occur in 2021/2022 planning period and submitted late, 20.0 (12 out of 60) was expected to cause congestion. Overall, of all the annual FTR market modeled outages expected to occur in the 2020/2021 planning period and submitted late, 9.4 percent (5 out of 53) were expected to cause congestion.

**Table 12-67 Annual FTR market modeled transmission facility outage requests by congestion: June 2020 through May 2022**

Received Status	Planned Duration	2020/2021				2021/2022			
		Congestion Expected	No Congestion Expected	Total	Percent Congestion Expected	Congestion Expected	No Congestion Expected	Total	Percent Congestion Expected
On Time	<2 weeks	17	59	76	22.4%	14	72	86	16.3%
	>=2 weeks & <2 months	19	69	88	21.6%	35	93	128	27.3%
	>=2 months	17	87	104	16.3%	18	75	93	19.4%
	Total	53	215	268	19.8%	67	240	307	21.8%
Late	<2 weeks	2	10	12	16.7%	2	11	13	15.4%
	>=2 weeks & <2 months	1	12	13	7.7%	6	10	16	37.5%
	>=2 months	2	26	28	7.1%	4	27	31	12.9%
	Total	5	48	53	9.4%	12	48	60	20.0%

Table 12-68 shows that 20.1 percent of outage requests modeled in the annual FTR market for 2021/2022 planning period and with a duration of two weeks or longer but shorter than two months were cancelled after the FTR auction was open, compared to 25.7 percent for the 2020/2021 planning period. Table 12-68 also shows that 20.2 percent of outages requests modeled in the Annual FTR Market for 2021/2022 planning period and with a duration of two months or longer were cancelled, compared to 17.4 percent for the 2020/2021 planning period.

**Table 12-68 Annual FTR market modeled transmission facility outage requests by processed status: June 2020 through May 2022**

Planned Duration	Processed Status	2020/2021		2021/2022	
		Outage Requests	Percent	Outage Requests	Percent
<2 weeks	In Progress	5	5.7%	11	11.1%
	Denied	0	0.0%	1	1.0%
	Approved	0	0.0%	0	0.0%
	Cancelled	27	30.7%	27	27.3%
	Revised	0	0.0%	0	0.0%
	Active	0	0.0%	0	0.0%
	Completed	56	63.6%	60	60.6%
	Total	88	100.0%	99	100.0%
>=2 weeks & <2 months	In Progress	7	6.9%	28	19.4%
	Denied	0	0.0%	1	0.7%
	Approved	1	1.0%	0	0.0%
	Cancelled	26	25.7%	29	20.1%
	Revised	0	0.0%	1	0.7%
	Active	0	0.0%	0	0.0%
	Completed	67	66.3%	85	59.0%
	Total	101	100.0%	144	100.0%
>=2 months	In Progress	14	10.6%	10	8.1%
	Denied	0	0.0%	0	0.0%
	Approved	0	0.0%	3	2.4%
	Cancelled	23	17.4%	25	20.2%
	Revised	0	0.0%	0	0.0%
	Active	2	1.5%	3	2.4%
	Completed	93	70.5%	83	66.9%
	Total	132	100.0%	124	100.0%
Total Cancelled		76	23.7%	81	22.1%
Grand Total		321		367	

More outage requests were not modeled in the Annual FTR Market than were modeled in the Annual FTR Market. In 2021/2022 planning period, 367 outage requests were modeled and 19,270 outage requests were not modeled in the Annual FTR Market. In the 2020/2021 planning period, 321 outage requests were modeled and 20,353 outage requests were not modeled in the Annual FTR Market.

Table 12-69 shows that 13.7 percent of outage requests not modeled in the Annual FTR Auction with duration longer than or equal to two months, labeled On Time according to the rules, were submitted or rescheduled after the Annual FTR Auction bidding opening date for 2021/2022 planning period compared to 8.6 percent in the 2020/2021 planning period.

**Table 12-69 Transmission facility outage requests not modeled in Annual FTR Auction: June 2020 through May 2022**

Planned Duration	2020/2021						2021/2022					
	On Time			Late			On Time			Late		
	Before Bidding Opening Date	After Bidding Opening Date	Percent After	Before Bidding Opening Date	After Bidding Opening Date	Percent After	Before Bidding Opening Date	After Bidding Opening Date	Percent After	Before Bidding Opening Date	After Bidding Opening Date	Percent After
<2 weeks	1,994	8,613	81.2%	237	6,784	96.6%	1,925	8,365	81.3%	213	6,112	96.6%
>=2 weeks & <2 months	707	306	30.2%	154	809	84.0%	646	346	34.9%	123	805	86.7%
>=2 months	213	20	8.6%	194	322	62.4%	151	24	13.7%	188	372	66.4%
Total	2,914	8,939	75.4%	585	7,915	93.1%	2,722	8,735	76.2%	524	7,289	93.3%

Table 12-70 shows that 90.9 percent of late outage requests that were not modeled in the Annual FTR Auction with duration longer than or equal to two months and submitted after the Annual FTR Auction bidding opening date, and were active or completed in 2021/2022 planning period. It also shows that 91.3 percent of late outage requests which were not modeled in the Annual FTR Auction with duration longer than or equal to two months and submitted after the Annual FTR Auction bidding opening date were active or completed in the 2020/2021 planning period.

**Table 12-70 Late transmission facility outage requests: June 2020 through May 2022**

Planned Duration	2020/2021			2021/2022		
	Completed Outages	Total	Percent Complete	Completed Outages	Total	Percent Complete
<2 weeks	5,880	6,784	86.7%	5,295	6,112	86.6%
>=2 weeks & <2 months	707	809	87.4%	704	805	87.5%
>=2 months	294	322	91.3%	338	372	90.9%
Total	6,881	7,915	86.9%	6,337	7,289	86.9%

Although the definition of late outages was developed in order to prevent outages for the planning period being submitted after the opening of bidding in the Annual FTR Auction, the rules have not functioned effectively because the rule has no direct connection to the date on which bidding opens for the Annual FTR Auction. By requiring all long-duration transmission outages to be submitted before February 1, PJM outage submission rules only prevent long-duration transmission outages from being submitted late. The rule does not address the situation in which long-duration transmission outages are submitted on time, but are rescheduled so that they are late. There is no rule to address the situation in which short-duration outages (duration <= 5 days) are submitted on time, but are changed to long-duration transmission outages after the outages are approved and active. The Annual FTR Auction model may

consider transmission outages planned for longer than two weeks but less than two months. Those outages not only include long duration outages but also include outages shorter than 30 days. In those cases, PJM outage submission rules failed to prevent those transmission outages from being submitted late. The MMU recommends that PJM modify the rules to eliminate the approval of outage requests submitted or rescheduled after the opening of bidding in the Annual FTR Auction.

## Monthly FTR Market

When determining transmission outages to be modeled in the Monthly Balance of Planning Period FTR Auction, PJM considers all outages with planned duration longer than five days and may consider outages with planned durations less than or equal to five days. PJM exercises significant discretion in selecting outages to be modeled. PJM posts an FTR outage list to the FTR webpage usually at least one week before the auction bidding opening day.<sup>118</sup> Table 12-71 and Table 12-72 show the summary information

<sup>118</sup> PJM Financial Transmission Rights, "2015/2016 Monthly FTR Auction Transmission Outage Modeling," <<http://www.pjm.com/-/media/markets-ops/ftr/ftr-allocation/monthly-ftr-auctions/2015-2016-monthly-transmission-outages-that-may-cause-infeasibilities.ashx?la=en>> (December 9, 2015).

on outage requests modeled in the Monthly Balance of Planning Period FTR Auction and Table 12-73 and Table 12-74 show the summary information on outage requests not modeled in the Monthly Balance of Planning Period FTR Auction.

Table 12-71 shows that on average, 33.1 percent of the outage requests modeled in the Monthly Balance of Planning Period FTR Auction were submitted late according to outage submission rules in 2021/2022 planning period. On average, 29.7 percent of the outage requests modeled in the Monthly Balance of Planning Period FTR Auction were submitted late according to outage submission rules in the 2020/2021 planning period.

**Table 12-71 Monthly Balance of Planning Period FTR Auction modeled transmission facility outage requests by received status: June 2020 through May 2022**

Month	2020/2021			2021/2022				
	On Time	Late	Total	Percent Late	On Time	Late	Total	Percent Late
Jun	215	101	316	32.0%	209	116	325	35.7%
Jul	96	71	167	42.5%	103	85	188	45.2%
Aug	118	81	199	40.7%	125	81	206	39.3%
Sep	468	140	608	23.0%	363	147	510	28.8%
Oct	596	176	772	22.8%	480	192	672	28.6%
Nov	486	185	671	27.6%	454	205	659	31.1%
Dec	324	130	454	28.6%	325	153	478	32.0%
Jan	224	64	288	22.2%	214	118	332	35.5%
Feb	211	116	327	35.5%	216	121	337	35.9%
Mar	429	142	571	24.9%	399	142	541	26.2%
Apr	477	174	651	26.7%	454	172	626	27.5%
May	412	180	592	30.4%	402	182	584	31.2%
Average	338	130	468	29.7%	312	143	455	33.1%

Table 12-72 shows that on average, 16.9 percent of outage requests modeled in the Monthly Balance of Planning Period FTR Auction were cancelled in 2021/2022 planning period. On average, 18.0 percent of outage requests modeled in the Monthly Balance of Planning Period FTR Auction were cancelled in the 2020/2021 planning period.

**Table 12-72 Monthly Balance of Planning Period FTR Auction modeled transmission facility outage requests by processed status: June 2020 through May 2022**

Planning Year	Month	In					Active	Complete	Total	Percent Cancelled
		Process	Denied	Approved	Cancelled	Revised				
2020/2021	Jun	27	5	7	48	1	75	153	316	15.2%
	Jul	9	16	4	22	0	73	43	167	13.2%
	Aug	22	2	4	26	0	71	74	199	13.1%
	Sep	65	0	19	114	0	195	215	608	18.8%
	Oct	67	4	17	161	2	208	313	772	20.9%
	Nov	52	1	42	151	0	160	265	671	22.5%
	Dec	31	1	7	97	0	75	243	454	21.4%
	Jan	39	1	6	46	0	79	117	288	16.0%
	Feb	36	0	11	52	0	115	113	327	15.9%
	Mar	73	0	11	92	0	175	220	571	16.1%
	Apr	53	0	7	111	0	215	265	651	17.1%
	May	38	2	12	92	0	122	326	592	15.5%
Average	43	3	12	84	0	130	196	468	18.0%	
2021/2022	Jun	35	2	10	55	0	76	147	325	16.9%
	Jul	15	2	4	26	0	76	65	188	13.8%
	Aug	24	1	4	25	0	86	66	206	12.1%
	Sep	56	2	15	89	0	176	172	510	17.5%
	Oct	56	7	21	120	0	216	252	672	17.9%
	Nov	47	3	15	108	0	182	304	659	16.4%
	Dec	32	2	8	82	0	95	259	478	17.2%
	Jan	41	1	19	61	0	96	114	332	18.4%
	Feb	43	1	17	54	0	105	117	337	16.0%
	Mar	64	2	15	109	0	157	194	541	20.1%
	Apr	55	2	20	117	0	163	269	626	18.7%
	May	60	8	25	106	0	122	263	584	18.2%
Average	44	3	14	79	0	129	185	455	16.9%	

Table 12-73 shows that on average, 8.6 percent of outage requests not modeled in the Monthly Balance of Planning Period FTR Auction, labeled On Time according to the rules, were submitted after the monthly FTR auction bidding opening dates in 2021/2022 planning period, compared to 9.8 percent in the 2020/2021 planning period. On average, 61.6 percent of outage requests not modeled in the Monthly Balance of Planning Period FTR Auction, labeled Late according to the rules, were submitted after the Monthly Balance of Planning Period FTR Auction bidding opening dates in 2021/2022 planning period, compared to 65.5 percent in the 2020/2021 planning period.

Table 12-73 Transmission facility outage requests not modeled in Monthly Balance of Planning Period FTR Auction: June 2020 through May 2022

	2020/2021						2021/2022					
	On Time			Late			On Time			Late		
	Before Bidding Opening Date	After Bidding Opening Date	Percent After	Before Bidding Opening Date	After Bidding Opening Date	Percent After	Before Bidding Opening Date	After Bidding Opening Date	Percent After	Before Bidding Opening Date	After Bidding Opening Date	Percent After
Jun	798	105	11.6%	348	775	69.0%	777	86	10.0%	312	624	66.7%
Jul	430	90	17.3%	271	605	69.1%	349	69	16.5%	272	501	64.8%
Aug	437	75	14.6%	262	617	70.2%	367	47	11.4%	262	464	63.9%
Sep	1,060	88	7.7%	272	641	70.2%	938	101	9.7%	318	615	65.9%
Oct	1,184	78	6.2%	362	617	63.0%	1,037	75	6.7%	385	663	63.3%
Nov	961	74	7.1%	354	580	62.1%	860	50	5.5%	411	516	55.7%
Dec	737	69	8.6%	390	587	60.1%	673	34	4.8%	341	524	60.6%
Jan	593	86	12.7%	275	457	62.4%	575	73	11.3%	309	460	59.8%
Feb	581	59	9.2%	275	575	67.6%	704	61	8.0%	350	528	60.1%
Mar	1,345	82	5.7%	305	627	67.3%	1,309	58	4.2%	334	583	63.6%
Apr	1,369	119	8.0%	383	645	62.7%	1,543	100	6.1%	387	529	57.8%
May	1,183	114	8.8%	361	601	62.5%	1,211	124	9.3%	423	569	57.4%
Average	890	87	9.8%	322	611	65.5%	862	73	8.6%	342	548	61.6%

Table 12-74 shows that on average, 70.5 percent of late outage requests which were not modeled in the Monthly Balance of Planning Period FTR Auction, submitted after the Monthly Balance of Planning Period FTR Auction bidding opening dates, were approved and complete in 2021/2022 planning period, compared to 71.2 percent in the 2020/2021 planning period.

Table 12-74 Late transmission facility outage requests: June 2020 through May 2022

	2020/2021			2021/2022		
	Completed Outages	Total	Percent Complete	Completed Outages	Total	Percent Complete
Jun	564	775	72.8%	429	624	68.8%
Jul	436	605	72.1%	371	501	74.1%
Aug	447	617	72.4%	307	464	66.2%
Sep	436	641	68.0%	408	615	66.3%
Oct	419	617	67.9%	470	663	70.9%
Nov	392	580	67.6%	347	516	67.2%
Dec	440	587	75.0%	402	524	76.7%
Jan	341	457	74.6%	301	460	65.4%
Feb	390	575	67.8%	370	528	70.1%
Mar	440	627	70.2%	407	583	69.8%
Apr	475	645	73.6%	383	529	72.4%
May	437	601	72.7%	439	569	77.2%
Average	435	611	71.2%	386	548	70.5%


## Transmission Facility Outage Analysis in the Day-Ahead Energy Market

Transmission facility outages also affect the energy market. Just as with the FTR market, it is critical that outages that affect the operating day are known prior to the submission of offers in the day-ahead energy market so that market participants can understand market conditions and PJM can accurately model market conditions in the day-ahead market. PJM requires transmission owners to submit changes to outages scheduled for the next two days no later than 09:30 am.<sup>119</sup>

There are three relevant time periods for the analysis of the impact of transmission outages on the energy market: before the day-ahead market is closed; when the day-ahead market save cases are created; and during the operating day. The list of approved or active outage requests before the day-ahead market is closed is available to market participants. The day-ahead market model uses outages included in the day-ahead market save cases as an input. The outages that actually occurred during the operating day are the outages that affect the real-time market. If the three sets of outages are the same, there is no potential impact on markets. If the three sets of outages differ, there is a potential negative impact on markets. For example, if the list of outages before the day-ahead market was closed was different from the list of outages that included in the day-ahead market save cases, the day-ahead market participant would have inconsistent outage information as what day-ahead market model used.

For example for the operating day of May 5, 2018, Figure 12-6 shows that: there were 443 approved or active outages seen by market participants before the day-ahead market was closed; there were 329 outage requests included in the day-ahead market model; there were 315 outage requests included in both sets of outage; there were 128 outage requests approved or active before the day-ahead market was closed but not included as inputs in day-ahead market model; and there were 14 outage requests included in day-ahead market model but not available to market participants prior to the day-ahead market.

Figure 12-6 Illustration of day-ahead market analysis: May 5, 2018

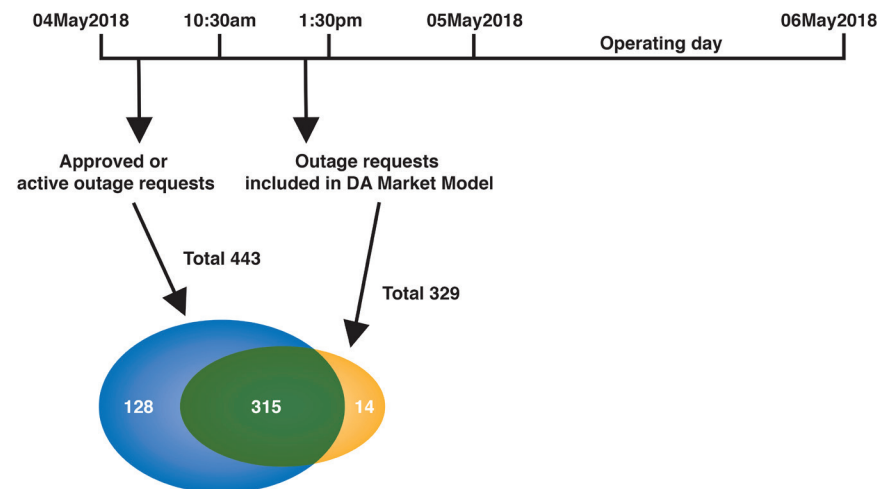

<sup>119</sup> PJM, "Manual 3: Transmission Operations," Rev. 62 (June 1, 2022).

Figure 12-7 compares the weekly average number of active or approved outages available to market participants prior to the close of the day-ahead market with the outages included as inputs to the day-ahead market by PJM.

**Figure 12-7 Approved or active outage requests: January 2015 through June 2022**

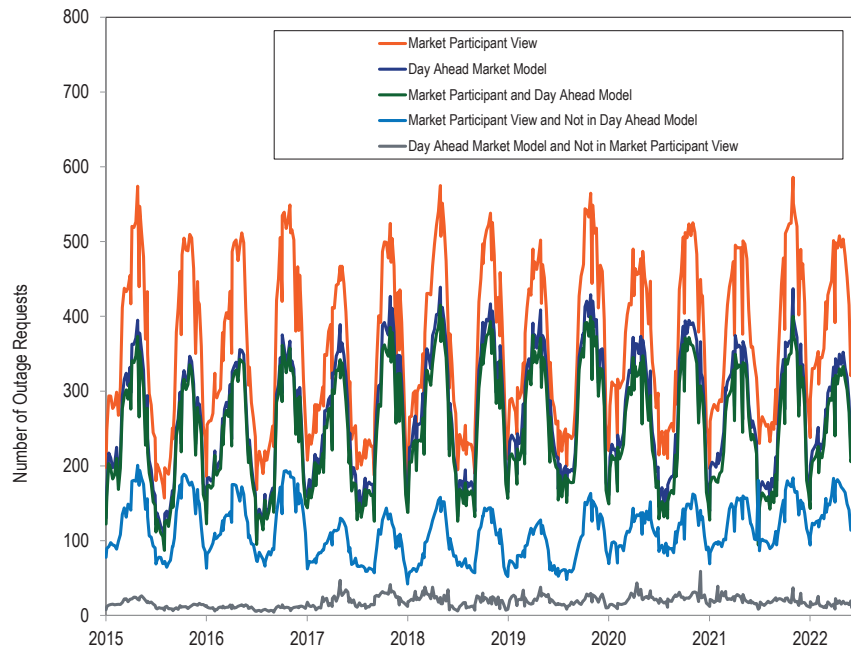


Figure 12-8 compares the weekly average number of outages included as inputs to the day-ahead market by PJM with the outages that actually occurred during the operating day.

**Figure 12-8 Day-ahead market model outages: January 2015 through June 2022**

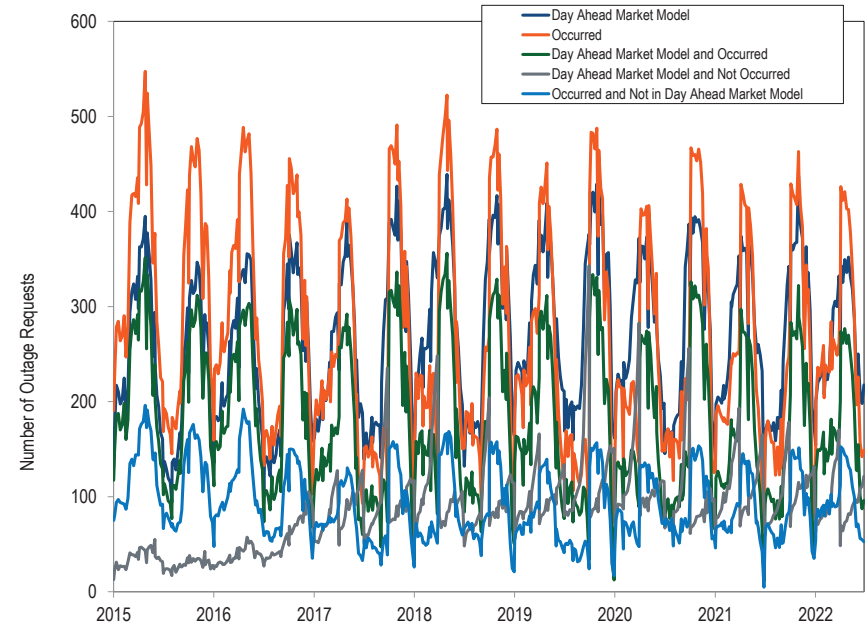


Figure 12-9 compares the weekly average number of active or approved outages available to market participants prior to the close of the day-ahead market with the outages that actually occurred during the operating day.

**Figure 12-9 Approved or active outage requests: January 2015 through June 2022**

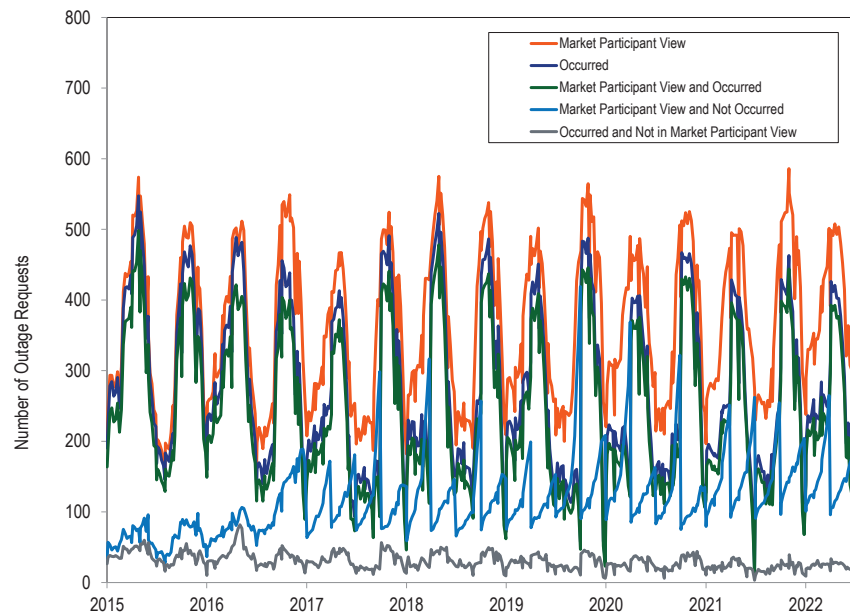


Figure 12-7, Figure 12-8, and Figure 12-9 show that on a weekly average basis, the active or approved outages available to day-ahead market participants, the outages included as inputs in the day-ahead market model and the outages that actually occurred in real time are not consistent. The active or approved outages available to day-ahead market participants are more consistent with the outages that actually occurred in real time than with the outages included in the day-ahead market model.