

Generation and Transmission Planning¹ Overview

Planned Generation and Retirements^{2 3}

- **Planned Generation Additions.** As of June 30, 2018, 106,556.0 MW of capacity were in generation request queues for construction through 2024. Of the capacity in queues, 12,312.1 MW, or 11.6 percent, are uprates and the rest are new generation. Wind projects account for 23,427.3 MW of nameplate capacity or 22.0 percent of the capacity in the queues. Natural gas fired projects account for 57,491.3 MW of nameplate capacity or 54.0 percent of the capacity in the queues.
- **Generation Retirements.** Between 2011 and 2021, 39,186.1 MW have been, or are planned to be, retired. Of that, 9,227.8 MW are planned to retire after June 30, 2018. In the first six months of 2018, 4,194.9 MW were retired. Of the 9,227.8 MW pending retirement, 3,442.5 MW (37.3 percent) are coal units. The coal unit retirements are a result of low gas prices, low energy prices, low capacity prices and the investments required for compliance with the EPA's Mercury and Air Toxics Standards (MATS) for some units.
- **Existing Generation Mix.** A significant shift in the distribution of unit types within the PJM footprint continues as natural gas fired units enter the queue and coal fired steam units retire. There are 129.0 MW of coal fired steam capacity and 57,491.3 MW of gas fired capacity in the queue. The replacement of coal fired steam units by units burning natural gas will significantly affect future congestion, the role of firm and interruptible gas supply, and natural gas supply infrastructure.

Generation and Transmission Interconnection Planning Process

- Any entity that requests interconnection of a new generating facility, including increases to the capacity of an existing generating unit, or that requests interconnection of a merchant transmission facility, must follow the process defined in the PJM tariff to obtain interconnection service.⁴ PJM's process is designed to ensure that new generation is added in a reliable and systematic manner. The process is complex and time consuming at least in part as a result of the required analyses. The cost, time and uncertainty associated with interconnecting to the grid may create barriers to entry for potential entrants.
- The queue contains a substantial number of projects that are not likely to be built. The queue process results in a substantial number of projects that drop out. As of June 30, 2018, 3,922 projects, representing 497,006.3 MW, have entered the queue process since its inception. Of those, 787 projects, representing 56,334.9 MW, went into service. Of the projects that entered the queue process, 67.2 percent of the MW withdrew prior to completion. Such projects may create barriers to entry for projects that would otherwise be completed by taking up queue positions, increasing interconnection costs and creating uncertainty.
- A transmission owner (TO) is an "entity that owns, leases or otherwise has a possessory interest in facilities used for the transmission of electric energy in interstate commerce under the tariff."⁵ Where the transmission owner is a vertically integrated company that also owns generation, there is a potential conflict of interest when the transmission owner evaluates the interconnection requirements of new generation which is a competitor to the generation of the parent company and when the transmission owner evaluates the interconnection requirements of new generation which is part of the same company as the transmission owner. There is also a potential conflict of interest when the transmission owner evaluates the interconnection requirements of a merchant transmission developer which is a competitor of the transmission owner.

¹ Totals presented in this section include corrections to historical data and may not match totals presented in previous reports.

² See PJM "Generator Deactivations," at <<http://www.pjm.com/planning/services-requests/gen-deactivations.aspx>>.

³ See PJM "New Services Queue," at <<https://www.pjm.com/planning/services-requests/interconnection-queues.aspx>>.

⁴ See OATT Parts IV & VI.

⁵ See OATT § 1 (Transmission Owner).

Regional Transmission Expansion Plan (RTEP)

- The Transmission Expansion Advisory Committee (TEAC) regularly reviews internal and external proposals to improve transmission reliability throughout PJM. These proposals are periodically presented to the PJM Board of Managers for authorization. In the first six months of 2018, the PJM Board approved \$397.0 million in upgrades.
- There are currently three backbone projects under development, Surry Skiffes Creek 500kV, and the conversion of the Marion-Bayonne and Bayway-Linden lines from 138 kV to 345 kV.⁶
- Through June 30, 2018, PJM has completed two market efficiency cycles. In the first cycle, PJM received 92 proposals for 11 identified issues. In the second market efficiency cycle, PJM received 96 proposals for four identified issues.
- The first Targeted Market Efficiency Process (TMEP) analysis included the investigation of congestion on 50 market to market flowgates. The study resulted in the evaluation of 13 potential upgrades, resulting in the recommendation of five TMEP projects. The five projects address \$59 million in historical congestion, with a TMEP benefit of \$99.6 million. The projects have a total cost of \$20 million, with a 5.0 average benefit/cost ratio. PJM and MISO presented the five recommended projects to their boards in December, 2017, and both boards approved all five projects.⁷

Transmission Facility Outages

- PJM maintains a list of reportable transmission facilities. When the reportable transmission facilities need to be taken out of service, PJM transmission owners are required to report planned transmission facility outages as early as possible. PJM processes the transmission facility outage requests according to rules in PJM's Manual 3 to decide if the outage is on time or late and whether or not they will allow the outage.⁸

⁶ See "2017 RTEP Process Scope and Input Assumptions White Paper," P 25. <<http://www.pjm.com/-/media/library/reports-notice/2017-rtep/20170731-rtep-input-assumptions-and-scope-whitepaper.ashx?1a=en>>.

⁷ See PJM. "MISO PJM IPSAC" (January 12, 2018) <<http://www.pjm.com/-/media/committees-groups/stakeholder-meetings/ipsac/20180112/20180112-ipsac-presentation.ashx>>.

⁸ PJM. "Manual 03: Transmission Operations," Rev. 53 (June 1, 2018) Section 4.

- There were 21,342 transmission outage requests submitted in the 2017/2018 planning period. Of the requested outages, 75.9 percent of the requested outages were planned for less than or equal to five days and 7.7 percent of requested outages were planned for greater than 30 days. Of the requested outages, 49.7 percent were late according to the rules in PJM's Manual 3.

Recommendations

The MMU recommends improvements to the planning process:

- The MMU recommends that PJM continue to incorporate the principle that the goal of transmission planning should be the incorporation of transmission investment decisions into market driven processes as much as possible. (Priority: Low. First reported 2001. Status: Not adopted.)
- The MMU recommends the creation of a mechanism to permit a direct comparison, or competition, between transmission and generation alternatives, including which alternative is less costly and who bears the risks associated with each alternative. (Priority: Low. First reported 2013. Status: Not adopted.)
- The MMU recommends that rules be implemented to permit competition to provide financing for transmission projects. This competition could reduce the cost of capital for transmission projects and significantly reduce total costs to customers. (Priority: Low. First reported 2013. Status: Not adopted.)
- The MMU recommends that rules be implemented to require that project cost caps on new transmission projects be part of the evaluation of competing projects. (Priority: Low. First reported 2015. Status: Not adopted.)
- The MMU recommends that barriers to entry be addressed in a timely manner in order to help ensure that the capacity market will result in the entry of new capacity to meet the needs of PJM market participants and reflect the uncertainty and resultant risks in the cost of new entry used to establish the capacity market demand curve in RPM. (Priority: Low. First reported 2012. Status: Not adopted.)

- The MMU recommends that the question of whether Capacity Injection Rights (CIRs) should persist after the retirement of a unit be addressed. Even if the treatment of CIRs remains unchanged, the rules need to ensure that incumbents cannot exploit control of CIRs to block or postpone entry of competitors.⁹ (Priority: Low. First reported 2013. Status: Not adopted.)
- The MMU recommends outsourcing interconnection studies to an independent party to avoid potential conflicts of interest. Currently, these studies are performed by incumbent transmission owners under PJM's direction. This creates potential conflicts of interest, particularly when transmission owners are vertically integrated and the owner of transmission also owns generation. (Priority: Low. First reported 2013. Status: Not adopted.)
- The MMU recommends that PJM establish fair terms of access to rights of way and property, such as at substations, in order to remove any barriers to entry and permit competition between incumbent transmission providers and merchant transmission providers in the RTEP. (Priority: Medium. First reported 2014. Status: Not adopted.)
- The MMU recommends that PJM enhance the transparency and queue management process for merchant transmission investment. Issues related to data access and complete explanations of cost impacts should be addressed. The goal should be to remove barriers to competition from merchant transmission. (Priority: Medium. First reported 2015. Status: Not adopted.)
- The MMU recommends improvements in queue management including that PJM establish a review process to ensure that projects are removed from the queue if they are not viable, as well as a process to allow commercially viable projects to advance in the queue ahead of projects which have failed to make progress, subject to rules to prevent gaming. (Priority: Medium. First reported 2013. Status: Partially adopted.)
- The MMU recommends an analysis of the study phase of PJM's transmission planning to reduce the need for postponements of study results, to decrease study completion times, and to improve the likelihood that a project at a given phase in the study process will successfully go into service. (Priority: Medium. First reported 2014. Status: Partially adopted.)
- The MMU recommends, to ensure maximum competition, that PJM support ending the exemption of supplemental projects from the Order No. 1000 competitive process. (Priority: Medium. First reported 2017. Status: Not adopted.)
- The MMU recommends consideration of changing the minimum distribution factor in the allocation from 0.01 to 0.00 and adding a threshold minimum usage impact on the line. (Priority: Medium. First reported 2015. Status: Not adopted.)
- The MMU recommends that PJM reevaluate all transmission outage tickets as on time or late as if they were new requests when an outage is rescheduled and apply the standard rules for late submissions to any such outages. (Priority: Low. First reported 2014. Status: Not adopted.)
- The MMU recommends that PJM draft a clear definition of the congestion analysis required for transmission outage requests to include in Manual 3 after appropriate review. (Priority: Low. First reported 2015. Status: Not adopted.)
- The MMU recommends that PJM modify the rules to reduce or eliminate the approval of late outage requests submitted or rescheduled after the FTR auction bidding opening date. (Priority: Low. First reported 2015. Status: Not adopted.)
- The MMU recommends that PJM not permit transmission owners to divide long duration outages into smaller segments to avoid complying with the requirements for long duration outages. (Priority: Low. First reported 2015. Status: Not adopted.)

Conclusion

The goal of PJM market design should be to enhance competition and to ensure that competition is the driver for all the key elements of PJM markets. But transmission investments have not been fully incorporated into competitive markets. The construction of new transmission facilities has significant

⁹ See "Comments of the Independent Market Monitor for PJM," Docket No. ER12-1177-000 <http://www.monitoringanalytics.com/reports/Reports/2012/JMM_Comments_ER12-1177-000_20120312.pdf>.

impacts on the energy and capacity markets. But when generating units retire or load increases, there is no market mechanism in place that would require direct competition between transmission and generation to meet loads in the affected area. In addition, despite FERC Order No. 1000, there is not yet a transparent, robust and clearly defined mechanism to permit competition to build transmission projects, to ensure that competitors provide a total project cost cap, or to obtain least cost financing through the capital markets.

The addition of a planned transmission project changes the parameters of the capacity auction for the area, changes the amount of capacity needed in the area, changes the capacity market supply and demand fundamentals in the area and may effectively forestall the ability of generation to compete. But there is no mechanism to permit a direct comparison, let alone competition, between transmission and generation alternatives. There is no mechanism to evaluate whether the generation or transmission alternative is less costly, whether there is more risk associated with the generation or transmission alternatives, or who bears the risks associated with each alternative. Creating such a mechanism should be an explicit goal of PJM market design.

Managing the generation queues is a highly complex process. The PJM queue evaluation process has been substantially improved in recent years and it is more efficient and effective as a result. The PJM queue evaluation process should continue to be improved to help ensure that barriers to competition for new generation investments are not created. Issues that need to be addressed include the ownership rights to CIRs, whether transmission owners should perform interconnection studies, and improvements in queue management to ensure that projects are removed from the queue if they are not viable, as well as a process to allow commercially viable projects to advance in the queue ahead of projects which have failed to make progress.

The PJM rules for competitive transmission development through the RTEP should build upon FERC Order No. 1000 to create real competition between incumbent transmission providers and merchant transmission providers. PJM should enhance the transparency and queue management process for merchant transmission investment. Issues related to data access and complete

explanations of cost impacts should be addressed. The goal should be to remove barriers to competition from merchant transmission. Another element of opening competition would be to consider transmission owners' ownership of property and rights of way at or around transmission substations. In many cases, the land acquired included property intended to support future expansion of the grid. Incumbents have included the costs of the property in their rate base. Because PJM now has the responsibility for planning the development of the grid under its RTEP process, property bought to facilitate future expansion should be a part of the RTEP process and be made available to all providers on equal terms.

There are currently no market incentives for transmission owners to submit and complete transmission outages in a timely and efficient manner. Requiring transmission owners to pay does not create an effective incentive when those payments are passed through to transmission customers. The process for the submission of planned transmission outages needs to be carefully reviewed and redesigned to limit the ability of transmission owners to submit transmission outages that are late for FTR auction bid submission dates and are late for the Day-Ahead Energy Market. The submission of late transmission outages can inappropriately affect market outcomes when market participants do not have the ability to modify market bids and offers.

Planned Generation and Retirements

Planned Generation Additions

Expected net revenues provide incentives to build new generation to serve PJM markets. The amount of planned new generation in PJM reflects investors' perception of the incentives provided by the combination of revenues from the PJM energy, capacity and ancillary service markets. On June 30, 106,556.0 MW of capacity were in generation request queues for construction through 2024. Although it is clear that not all generation in the queues will be built, PJM has added capacity steadily since markets were implemented on April 1, 1999.¹⁰

¹⁰ See Monitoring Analytics, "New Generation in the PJM Capacity Market: MW and Funding Sources for Delivery Years 2007/2008 through 2018/2019," <http://www.monitoringanalytics.com/reports/Reports/2016/New_Generation_in_the_PJM_Capacity_Market_20160504.pdf>.

PJM Generation Queues

Generation request queues are groups of proposed projects, including new units, reratings of existing units, capacity resources and energy only resources. Each queue is open for a fixed amount of time. Studies commence on all projects in a given queue when that queue closes. The duration of the queue period has varied. Queues A and B were open for a year. Queues C through T were open for six months. Starting in February 2008, Queues U through Y1 were open for three months. In May 2012, the duration of the queue period was reset to six months, starting with Queue Y2. Queue AD2 began on October 1, 2017 and closed on March 31, 2018. Queue AE1 began on April 1, 2018.

Projects that do not meet submission requirements are removed from the queue. All projects that have been entered in a queue and have met the submission requirements have a status assigned. Projects listed as active are undergoing one of the studies (feasibility, system impact, facility) required to proceed. Other status options are under construction, suspended, and in service. A project cannot be suspended until it has reached the status of under construction. Any project that entered the queue before February 1, 2011, can be suspended for up to three years. Projects that entered the queue after February 1, 2011, face an additional restriction in that the suspension period is reduced to one year if they affect any project later in the queue.¹¹ When a project is suspended, PJM extends the scheduled milestones by the duration of the suspension. If, at any time, a milestone is not met, PJM will initiate the termination of the Interconnection Service Agreement (ISA) and the corresponding cancellation costs must be paid by the customer.¹²

Table 12-1 shows MW in queues by expected completion date and MW changes in the queue between December 31, 2017, and June 30, 2018, for ongoing projects, i.e. projects with the status active, under construction or suspended.¹³ Projects that are already in service are not included here. Projects that have been withdrawn or removed from the queue are no longer included in the totals. The total MW in queues increased by 16,512.4 MW, or 18.3

percent, from 90,043.6 MW at the end of 2017 to 106,556.0 MW on June 30, 2018.

Table 12-1 Queue comparison by expected completion year (MW): December 31, 2017 and June 30, 2018¹⁴

Year	As of 12/31/2017	As of 6/30/2018	Year Change	
			MW	Percent
2008	12.0	12.0	0.0	0.0%
2009	0.0	0.0	0.0	0.0%
2010	0.0	0.0	0.0	0.0%
2011	102.5	102.5	0.0	0.0%
2012	251.7	251.7	0.0	0.0%
2013	210.5	210.5	0.0	0.0%
2014	27.8	12.8	(15.0)	(54.0%)
2015	602.4	484.1	(118.3)	(19.6%)
2016	2,072.4	1,447.2	(625.2)	(30.2%)
2017	5,076.2	4,177.2	(899.0)	(17.7%)
2018	18,310.8	16,189.6	(2,121.2)	(11.6%)
2019	25,222.9	25,788.9	566.0	2.2%
2020	24,681.6	31,080.4	6,398.7	25.9%
2021	10,411.9	18,493.3	8,081.5	77.6%
2022	3,060.9	3,815.9	755.0	24.7%
2023	0.0	3,170.0	3,170.0	0.0%
2024	0.0	1,320.0	1,320.0	0.0%
Total	90,043.6	106,556.0	16,512.4	18.3%

Table 12-2 shows the project status changes in more detail and how scheduled queue capacity has changed between December 31, 2017, and June 30, 2018. For example, 22,313.9 MW entered the queue in the first six months of 2018. Of those 22,313.9 MW, 5,801.5 MW have been withdrawn. Of the total 71,492.0 MW marked as active on December 31, 2017, 4,439.9 MW were withdrawn, 3,084.9 MW were suspended, 111.5 MW started construction, and 115.7 MW went into service by June 30, 2018. Analysis of projects that were suspended on December 31, 2017 show that 1,505.8 MW came out of suspension and are now active and 140.0 MW began construction in the first six months of 2018.

¹¹ See "PJM Manual 14C Generation and Transmission Interconnection Process," Rev. 12 (June 22, 2017) Section 3.7

¹² PJM does not track the duration of suspensions or PJM termination of projects.

¹³ Expected completion dates are entered when the project enters the queue. Actual completion dates are generally different than expected completion dates.

¹⁴ Wind and solar capacity in Table 12-1 through Table 12-5 have not been adjusted to reflect derating.

Table 12-2 Change in project status (MW): December 31, 2017 to June 30, 2018

Status as 12/31/2017	Total at 12/31/2017	Status at 06/30/2018				
		Active	In Service	Under Construction	Suspended	Withdrawn
(Entered during 2018)	0.0	16,512.4	0.0	0.0	0.0	5,801.5
Active	71,492.0	63,740.0	115.7	111.5	3,084.9	4,439.9
In Service	52,043.5	0.0	52,043.5	0.0	0.0	0.0
Under Construction	18,953.2	0.0	4,175.7	14,312.9	224.0	240.5
Suspended	9,356.1	1,505.8	0.0	140.0	6,924.5	785.8
Withdrawn	322,847.7	0.0	0.0	0.0	0.0	322,847.7
Total	474,692.4	81,758.3	56,334.9	14,564.4	10,233.4	334,115.4

On June 30, 2018, 106,556.0 MW of capacity were in generation request queues in the status of active, suspended or under construction. Table 12-3 shows each status by unit type. Of the 81,758.3 MW in the status of Active on June 30, 2018, 36,157.4 MW (44.2 percent) were combined cycle projects. Of the 14,564.4 MW in the status of under construction, 10,721.6 MW (73.6 percent) were combined cycle projects.

Table 12-3 Current project status (MW) by unit type: June 30, 2018¹⁵

	Battery	CC	CT - Natural Gas	CT - Oil	CT - Other	Fuel Cell	Hydro - Pumped Storage	Hydro - Run of River	Nuclear	RICE - Natural Gas	RICE - Oil	RICE - Other	Solar	Steam - Coal	Steam - Natural Gas	Steam - Other	Wind	Total
Active	616.1	36,157.4	3,030.7	14.0	0.0	1.9	47.6	20.5	167.5	94.9	4.0	15.6	23,539.4	81.0	94.0	40.0	17,833.7	81,758.3
Suspended	66.3	6,701.8	19.9	0.0	0.0	0.0	0.0	0.0	0.0	39.8	0.0	0.0	457.9	0.0	0.0	16.0	2,931.7	10,233.4
Under Construction	118.6	10,721.6	0.0	0.0	3.2	0.0	0.0	23.1	0.0	41.2	0.0	0.0	294.4	48.0	590.0	62.5	2,661.9	14,564.4
Total	800.9	53,580.8	3,050.6	14.0	3.2	1.9	47.6	43.6	167.5	175.9	4.0	15.6	24,291.6	129.0	684.0	118.5	23,427.3	106,556.0

Table 12-4 shows the amount of capacity active, in service, under construction, suspended, or withdrawn for each queue since the beginning of the RTEP process and the total amount of capacity that had been included in each queue. All items in queues A-M are either in service or have been withdrawn. As of June 30, 2018, there are 106,556.0 MW of capacity in queues that are not yet in service or already withdrawn, of which 9.6 percent are suspended, 13.7 percent are under construction and 76.7 percent have not begun construction.

¹⁵ The unit type RICE refers to Reciprocating Internal Combustion Engines.

Table 12-4 Capacity in PJM queues (MW): June 30, 2018¹⁶

Queue	Active	In Service	Under			Total
			Construction	Suspended	Withdrawn	
A Expired 31-Jan-98	0.0	9,094.0	0.0	0.0	17,252.0	26,346.0
B Expired 31-Jan-99	0.0	4,645.5	0.0	0.0	14,956.7	19,602.2
C Expired 31-Jul-99	0.0	531.0	0.0	0.0	3,558.3	4,089.3
D Expired 31-Jan-00	0.0	850.6	0.0	0.0	7,358.0	8,208.6
E Expired 31-Jul-00	0.0	795.2	0.0	0.0	8,021.8	8,817.0
F Expired 31-Jan-01	0.0	52.0	0.0	0.0	3,092.5	3,144.5
G Expired 31-Jul-01	0.0	1,189.6	0.0	0.0	17,961.8	19,151.4
H Expired 31-Jan-02	0.0	702.5	0.0	0.0	8,421.9	9,124.4
I Expired 31-Jul-02	0.0	103.0	0.0	0.0	3,728.4	3,831.4
J Expired 31-Jan-03	0.0	42.0	0.0	0.0	846.0	888.0
K Expired 31-Jul-03	0.0	99.0	0.0	0.0	485.3	584.3
L Expired 31-Jan-04	0.0	256.5	0.0	0.0	4,033.7	4,290.2
M Expired 31-Jul-04	0.0	504.8	0.0	0.0	3,705.6	4,210.4
N Expired 31-Jan-05	0.0	2,398.8	38.0	0.0	8,090.2	10,527.0
O Expired 31-Jul-05	0.0	1,688.2	437.0	0.0	5,466.8	7,592.0
P Expired 31-Jan-06	0.0	3,037.3	253.0	0.0	5,320.5	8,610.8
Q Expired 31-Jul-06	0.0	3,147.9	0.0	0.0	11,385.7	14,533.6
R Expired 31-Jan-07	540.0	2,046.4	0.0	500.0	19,668.9	22,755.3
S Expired 31-Jul-07	70.0	3,669.5	0.0	0.0	12,396.5	16,136.0
T Expired 31-Jan-08	0.0	3,014.0	1,182.5	300.0	23,013.3	27,509.8
U1 Expired 30-Apr-08	0.0	206.9	12.0	0.0	7,937.8	8,156.7
U2 Expired 31-Jul-08	120.0	267.5	560.0	300.0	15,932.2	17,179.7
U3 Expired 31-Oct-08	100.0	334.0	20.0	0.0	2,514.6	2,968.6
U4 Expired 31-Jan-09	300.0	85.2	0.0	200.0	4,445.0	5,030.2
V1 Expired 30-Apr-09	40.0	97.9	100.0	0.0	2,532.8	2,770.7
V2 Expired 31-Jul-09	150.0	989.9	16.1	0.0	3,475.1	4,631.1
V3 Expired 31-Oct-09	200.0	912.0	20.0	0.0	3,822.7	4,954.7
V4 Expired 31-Jan-10	0.0	748.8	0.0	205.0	3,503.0	4,456.8
W1 Expired 30-Apr-10	13.5	345.9	300.0	0.0	5,139.5	5,798.9
W2 Expired 31-Jul-10	72.5	289.2	0.0	23.0	3,018.7	3,403.4
W3 Expired 31-Oct-10	371.0	481.1	67.7	149.9	8,152.3	9,222.0
W4 Expired 31-Jan-11	7.4	1,091.8	409.9	415.0	3,698.2	5,622.3
X1 Expired 30-Apr-11	1,500.0	1,103.8	0.0	500.0	4,200.6	7,304.4
X2 Expired 31-Jul-11	187.5	3,544.4	0.0	585.0	5,578.4	9,895.2
X3 Expired 31-Oct-11	0.0	89.2	23.9	894.0	6,768.0	7,775.1
X4 Expired 31-Jan-12	0.0	1,181.9	1,767.0	0.0	2,419.4	5,368.3
Y1 Expired 30-Apr-12	106.0	1,797.5	614.0	0.0	5,719.7	8,237.2
Y2 Expired 31-Oct-12	378.3	1,051.8	407.1	229.0	9,227.5	11,293.7
Y3 Expired 30-Apr-13	0.0	625.9	1,004.6	0.0	4,609.2	6,239.6
Z1 Expired 31-Oct-13	713.0	1,247.0	2,127.8	39.8	3,997.2	8,124.8
Z2 Expired 30-Apr-14	105.6	422.4	2,435.0	252.9	2,949.9	6,165.8
AA1 Expired 31-Oct-14	2,207.3	753.8	1,431.0	1,835.1	5,771.5	11,998.7
AA2 Expired 30-Apr-15	4,558.3	476.9	545.9	2,371.0	8,114.2	16,066.3
AB1 Expired 31-Oct-15	10,631.0	116.5	684.4	1,195.7	7,805.0	20,432.6
AB2 Expired 31-Mar-16	9,891.1	122.5	55.5	183.6	5,009.2	15,261.9
AC1 Through 30-Sep-16	15,652.1	81.2	51.5	40.5	4,250.3	20,075.6
AC2 Through 30-Apr-17	6,377.5	0.0	0.6	13.9	6,229.7	12,621.6
AD1 Through 30-Sep-17	9,341.1	2.2	0.0	0.0	2,145.9	11,489.2
AD2 Through 31-Mar-18	14,687.3	0.0	0.0	0.0	5,813.9	20,501.2
AE1 Through 30-Sep-18	3,437.8	0.0	0.0	0.0	570.0	4,007.8
Total	81,758.3	56,334.9	14,564.4	10,233.4	334,115.4	497,006.3

¹⁶ Projects listed as partially in service are counted as in service for the purposes of this analysis.

Distribution of Units in the Queues

Table 12-5 shows the projects with a status of active, suspended or under construction, by unit type, and control zone. As of June 30, 2018, 106,556.0 MW of capacity were in generation request queues for construction through 2022¹⁷ Table 12-5 also shows the planned retirements for each zone.

Table 12-5 Queue totals for projects (active, suspended and under construction) by LDA, control zone and unit type (MW): June 30, 2018¹⁸

LDA	Zone	Battery	CC	CT -				Hydro - Pumped Storage	Hydro - Run of River	Nuclear	RICE -				Solar	Steam -			Wind	Total Queue Capacity	Planned Retirements
				Natural Gas	Oil	Other	Fuel Cell				Natural Gas	Oil	Other	Coal		Natural Gas	Other				
EMAAC	AECO	20.0	1,748.6	388.0	0.0	0.0	0.4	0.0	0.0	0.0	0.0	0.0	0.0	43.9	0.0	0.0	0.0	25.0	2,225.9	159.0	
	DPL	1.0	1,051.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	15.6	1,409.7	0.0	0.0	0.0	499.6	2,976.9	0.0	
	JCPL	109.0	1,897.2	0.0	0.0	0.0	0.2	0.0	0.0	0.0	0.0	0.0	0.0	158.6	0.0	0.0	0.0	2,640.0	4,804.9	614.5	
	PECO	0.0	994.5	0.0	0.0	0.0	0.0	0.0	0.0	94.0	0.0	4.0	0.0	18.0	0.0	0.0	0.0	0.0	1,110.5	51.8	
	PSEG	2.0	3,870.5	0.0	0.0	0.0	1.3	0.0	0.0	0.0	0.0	0.0	0.0	84.3	0.0	0.0	0.0	0.0	3,958.1	0.0	
	RECO	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	40.0	0.0	0.0	0.0	0.0	40.0	0.0	
	EMAAC Total	131.9	9,561.8	388.0	0.0	0.0	1.9	0.0	0.0	94.0	0.0	4.0	15.6	1,754.5	0.0	0.0	0.0	3,164.6	15,116.3	825.3	
SWMAAC	BGE	0.1	0.0	144.6	14.0	0.0	0.0	0.0	0.4	45.5	1.3	0.0	0.0	22.0	0.0	0.0	0.0	0.0	227.9	135.0	
	Pepco	0.0	1,932.6	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	82.2	0.0	0.0	0.0	0.0	2,014.8	0.0	
		SWMAAC Total	0.1	1,932.6	144.6	14.0	0.0	0.0	0.0	0.4	45.5	1.3	0.0	0.0	104.2	0.0	0.0	0.0	0.0	2,242.6	135.0
WMAAC	Met-Ed	0.0	598.9	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	230.0	0.0	0.0	0.0	0.0	828.9	805.0	
	PENELEC	0.0	1,436.7	482.9	0.0	0.0	0.0	0.0	0.0	0.0	82.8	0.0	0.0	146.8	0.0	590.0	0.0	479.1	3,218.3	110.0	
	PPL	30.0	4,255.8	19.9	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	30.0	0.0	0.0	16.0	531.1	4,882.8	0.0	
		WMAAC Total	30.0	6,291.4	502.8	0.0	0.0	0.0	0.0	0.0	0.0	82.8	0.0	0.0	406.8	0.0	590.0	16.0	1,010.1	8,929.9	915.0
Non-MAAC	AEP	104.0	8,016.0	413.0	0.0	3.2	0.0	34.0	0.0	28.0	12.0	0.0	0.0	6,137.6	83.0	30.0	40.0	8,719.5	23,620.3	0.0	
	APS	145.5	6,295.6	120.0	0.0	0.0	0.0	0.0	15.0	0.0	79.8	0.0	0.0	1,055.8	0.0	0.0	0.0	1,179.4	8,891.1	1,278.0	
	ATSI	8.8	6,131.0	70.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	921.0	0.0	0.0	0.0	1,466.1	8,596.8	2,910.0	
	ComEd	233.9	8,366.8	1,083.0	0.0	0.0	0.0	13.6	22.7	0.0	0.0	0.0	0.0	1,859.5	0.0	64.0	0.0	6,899.7	18,543.2	0.0	
	DAY	19.9	1,150.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	882.9	12.0	0.0	0.0	100.0	2,164.8	0.0	
	DEOK	19.8	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	400.0	20.0	0.0	0.0	0.0	439.8	0.0	
	DLCO	20.0	205.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	20.0	0.0	0.0	0.0	0.0	245.0	1,777.0	
	Dominion	87.0	5,630.6	254.2	0.0	0.0	0.0	0.0	5.5	0.0	0.0	0.0	0.0	10,419.5	14.0	0.0	62.5	888.0	17,361.3	1,387.5	
	EKPC	0.0	0.0	75.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	330.0	0.0	0.0	0.0	0.0	405.0	0.0	
	RMU	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
		Non-MAAC Total	638.9	35,795.0	2,015.2	0.0	3.2	0.0	47.6	43.2	28.0	91.8	0.0	0.0	22,026.2	129.0	94.0	102.5	19,252.6	80,267.2	7,352.5
	Total	800.9	53,580.8	3,050.6	14.0	3.2	1.9	47.6	43.6	167.5	175.9	4.0	15.6	24,291.6	129.0	684.0	118.5	23,427.3	106,556.0	9,227.8	

A significant shift in the distribution of unit types within the PJM footprint continues to develop as natural gas fired units enter the queue and coal fired steam units retire. As of June 30, 2018, there were 57,491.3 MW of natural gas fired capacity active, suspended or under construction in PJM queues. As of June 30, 2018, there were only 129.0 MW of coal fired steam capacity active, suspended or under construction in PJM queues. With respect to retirements, 3,442.5 MW of coal fired steam capacity and 366.8 MW of natural gas capacity are slated for deactivation between June 30, 2018, and December 31, 2021. The replacement

¹⁷ Since wind resources cannot be dispatched on demand, PJM rules previously required that the unforced capacity of wind resources be derated to 20 percent of nameplate capacity until actual generation data are available. Beginning with Queue U, PJM derates wind resources to 13 percent of nameplate capacity until there is operational data to support a different conclusion. PJM derates solar resources to 38 percent of nameplate capacity. Based on the derating of 20,381.8 MW of wind resources and 15,060.8 MW of solar resources, the 106,556.0 MW currently under construction, suspended or active in the queue would be reduced to 71,113.4 MW.

¹⁸ This data includes only projects with a status of active, under construction, or suspended.

of coal fired steam units by natural gas units will significantly affect future congestion, the role of firm and interruptible gas supply, and natural gas supply infrastructure.

Generation Retirements

As shown in Table 12-6, 39,186.1 MW have been, or are planned to be, retired between 2011 and 2021.¹⁹ Of that, 9,227.8 MW are planned to retire after June 30, 2018. In the first six months of 2018, 4,194.9 MW were retired. Of the 9,227.8 MW pending retirement, 3,442.5 MW (37.3 percent) are steam fired coal units. The coal unit retirements were a result of low gas prices, low capacity prices and the investments required for compliance with the EPA's Mercury and Air Toxics Standards (MATS) for some units.

Table 12-6 Summary of PJM unit retirements by unit type (MW): 2011 through 2021

	Battery	Combined Cycle	CT- Natural_ Gas	CT-Other	Hydro- Pumped Storage	Nuclear	RICE-Oil	RICE- Other	Steam- Biomass	Steam- Coal	Steam- Natural Gas	Steam- Oil	Wind	Total
Retirements 2011	0.0	0.0	0.0	128.3	0.0	0.0	2.7	0.0	0.0	543.0	522.5	0.0	0.0	1,196.5
Retirements 2012	0.0	0.0	250.0	240.0	0.0	0.0	0.0	0.0	16.0	5,907.9	0.0	548.0	0.0	6,961.9
Retirements 2013	0.0	0.0	0.0	0.0	0.0	0.0	5.9	7.0	8.0	2,589.9	82.0	166.0	0.0	2,858.8
Retirements 2014	0.0	0.0	136.0	422.0	0.0	0.0	0.0	15.3	0.0	2,239.0	158.0	0.0	0.0	2,970.3
Retirements 2015	0.0	0.0	1,319.0	858.2	0.0	0.0	10.3	0.0	0.0	7,064.8	0.0	0.0	10.4	9,262.7
Retirements 2016	0.0	0.0	0.0	71.0	0.5	0.0	8.0	3.9	0.0	243.0	74.0	0.0	0.0	400.4
Retirements 2017	40.0	0.0	0.0	0.0	0.0	0.0	0.0	0.8	0.0	2,038.0	34.0	0.0	0.0	2,112.8
Retirements 2018	0.0	425.0	0.0	39.6	0.0	0.0	17.2	6.1	25.0	2,854.0	680.0	148.0	0.0	4,194.9
Planned Retirements (April 2018 and later)	1.0	0.0	0.0	0.0	0.0	5,330.5	0.0	4.0	83.0	3,442.5	366.8	0.0	0.0	9,227.8
Total	41.0	425.0	1,705.0	1,759.1	0.5	5,330.5	44.1	37.1	132.0	26,922.1	1,917.3	862.0	10.4	39,186.1

¹⁹ See PJM "Generator Deactivations," at <<http://www.pjm.com/planning/services-requests/gen-deactivations.aspx>>.

A map of unit retirements between 2011 and 2021 is shown in Figure 12-1 with a mapping to unit names identified in Table 12-7.

Figure 12-1 Map of PJM unit retirements: 2011 through 2021

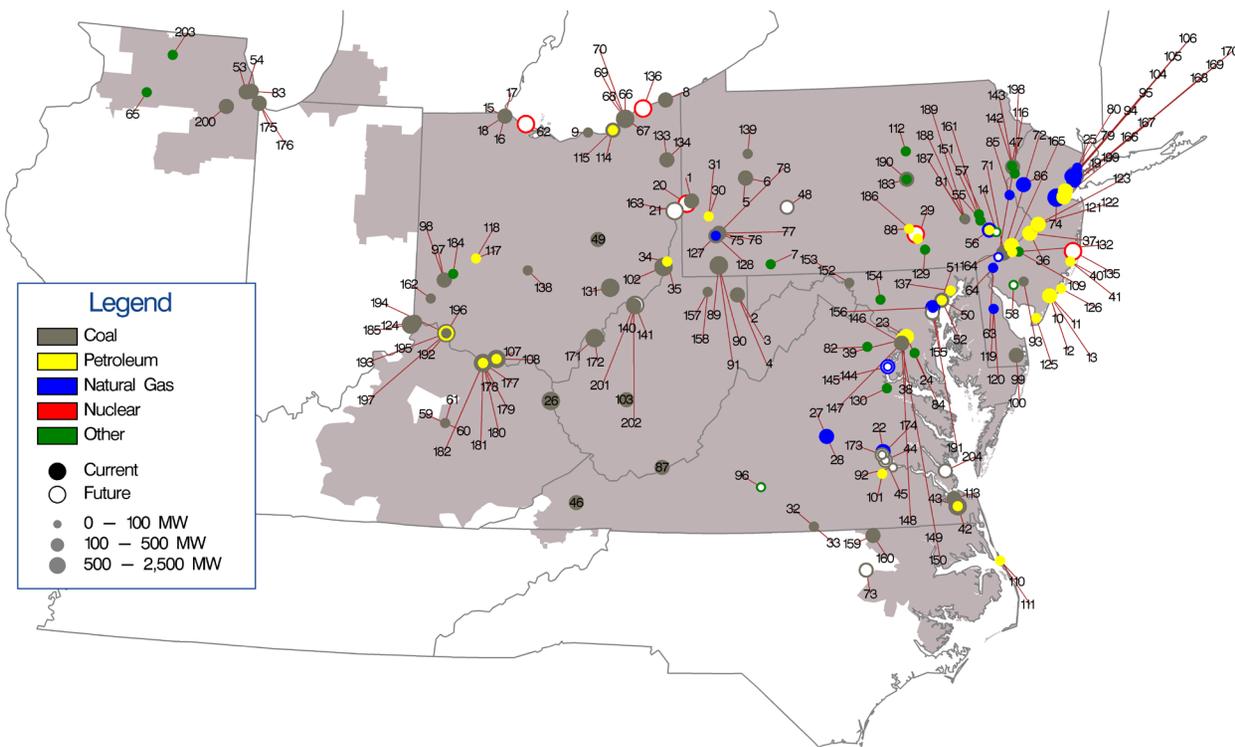


Table 12–7 Unit identification for map of PJM unit retirements: 2011 through 2021

ID	Unit	ID	Unit	ID	Unit	ID	Unit	ID	Unit		
1	AES Beaver Valley	36	Burlington 8,11	71	Eddystone 1	106	Kearny 9	141	Pleasants Power Station U2	176	State Line 4
2	Albright 1	37	Burlington 9	72	Eddystone 2	107	Killen 2	142	Portland 1	177	Stuart 1
3	Albright 2	38	Buzzard Point East Banks 1,2,4-8	73	Edgcomb NUG (Rocky 1-2)	108	Killen CT	143	Portland 2	178	Stuart 2
4	Albright 3	39	Buzzard Point West Banks 1-9	74	Edison 1-3	109	Kinsley Landfill	144	Possum Point 3	179	Stuart 3
5	Armstrong 1	40	Cedar 1	75	Elrama 1	110	Kitty Hawk GT 1	145	Possum Point 4	180	Stuart 4
6	Armstrong 2	41	Cedar 2	76	Elrama 2	111	Kitty Hawk GT 2	146	Potomac River 1	181	Stuart Diesels 1-4
7	Arnold (Green Mtn. Wind Farm)	42	Chesapeake 1-4	77	Elrama 3	112	Koppers Co. IPP	147	Potomac River 2	182	Stuart Diesels 1-4
8	Ashtabula 5	43	Chesapeake 7-10	78	Elrama 4	113	Lake Kingman	148	Potomac River 3	183	Sunbury 1-4
9	Avon Lake 7	44	Chesterfield 3	79	Essex 10-11	114	Lake Shore 18	149	Potomac River 4	184	Tait Battery
10	BL England 1	45	Chesterfield 4	80	Essex 12	115	Lake Shore EMD	150	Potomac River 5	185	Tanners Creek 1-4
11	BL England 2	46	Clinch River 3	81	Evergreen Power United Corstack	116	MH50 Markus Hook Co-gen	151	Pottstown LF (Moser)	186	Three Mile Island Unit 1
12	BL England 3	47	Columbia Dam Hydro	82	Fauquier County Landfill	117	Mad River CTS A	152	R Paul Smith 3	187	Titus 1
13	BL England Diesel Units 1-4	48	Colver Power Project	83	Fisk Street 19	118	Mad River CTS B	153	R Paul Smith 4	188	Titus 2
14	Barbados AES Battery	49	Conesville 3	84	GUDE Landfill	119	McKee 1	154	Reichs Ford Road Landfill Generator	189	Titus 3
15	Bay Shore 1	50	Crane 1	85	Gilbert 1-4	120	McKee 2	155	Riverside 4	190	Viking Energy NUG
16	Bay Shore 2	51	Crane 2	86	Glen Gardner 1-8	121	Mercer 1	156	Riverside 6	191	Wagner 2
17	Bay Shore 3	52	Crane GT1	87	Glen Lyn 5-6	122	Mercer 2	157	Riversville 5	192	Walter C Beckjord 1
18	Bay Shore 4	53	Crawford 7	88	Harrisburg 4 CT	123	Mercer 3	158	Riversville 6	193	Walter C Beckjord 2
19	Bayonne Cogen Plant (CC)	54	Crawford 8	89	Hatfield's Ferry 1	124	Miami Fort 6	159	Roanoke Valley 1	194	Walter C Beckjord 3
20	Beaver Valley U1 Nuclear Generating Unit	55	Cromby 1	90	Hatfield's Ferry 2	125	Middle 1-3	160	Roanoke Valley 2	195	Walter C Beckjord 4
21	Beaver Valley U2 Nuclear Generating Unit	56	Cromby 2	91	Hatfield's Ferry 3	126	Missouri Ave B,C,D	161	Rolling Hills Landfill Generator	196	Walter C Beckjord 5-6
22	Bellemeade	57	Cromby D	92	Hopewell James River Cogeneration	127	Mitchell 2	162	SMART Paper	197	Walter C Beckjord GT 1-4
23	Benning 15	58	Cumberland County Landfill Generator U1	93	Howard Down 10	128	Mitchell 3	163	Sammis 1-4	198	Warren County Landfill
24	Benning 16	59	Dale 1-2	94	Hudson 1	129	Modern Power Landfill NUG	164	Schuylkill 1	199	Werner 1-4
25	Bergen 3	60	Dale 3	95	Hudson 2	130	Morris Landfill Generator	165	Schuylkill Diesel	200	Will County 3
26	Big Sandy 2	61	Dale 4	96	Hurt NUG	131	Muskingum River 1-5	166	Sewaren 1	201	Willow Island 1
27	Bremo 3	62	Davis Besse U1 Nuclear Generating Unit	97	Hutchings 1-3, 5-6	132	National Park 1	167	Sewaren 2	202	Willow Island 2
28	Bremo 4	63	Deepwater 1	98	Hutchings 4	133	Niles 1	168	Sewaren 3	203	Winnebago Landfill
29	Brunner Island Diesels	64	Deepwater 6	99	Indian River 1	134	Niles 2	169	Sewaren 4	204	Yorktown 1-2
30	Brunot Island 1B	65	Dixon Lee Landfill Generator	100	Indian River 3	135	Oyster Creek	170	Sewaren 6		
31	Brunot Island 1C	66	Eastlake 1	101	Ingenco Petersburg	136	Perry U1 Nuclear Generating Unit	171	Sporn 1-4		
32	Buggs Island 1 (Mecklenberg)	67	Eastlake 2	102	Kammer 1-3	137	Perryman 2	172	Sporn 5		
33	Buggs Island 2 (Mecklenberg)	68	Eastlake 3	103	Kanawha River 1-2	138	Picway 5	173	Spruance NUG1 (Rich 1-2)		
34	Burger 3	69	Eastlake 4	104	Kearny 10	139	Piney Creek NUG	174	Spruance NUG2 (Rich 3-4)		
35	Burger EMD	70	Eastlake 5	105	Kearny 11	140	Pleasants Power Station U1	175	State Line 3		

The list of pending retirements is shown in Table 12-8.

Table 12-8 Planned retirement of PJM units: June 30, 2018

Unit	Zone	ICAP (MW)	Unit Type	Projected Deactivation Date
Hurt NUG	Dominion	83.0	Steam-Biomass	29-Jul-18
Barbados AES Battery	PECO	1.0	Battery	29-Jul-18
Yorktown 1-2	Dominion	323.0	Steam-Coal	09-Sep-18
Oyster Creek Nuclear Generating Station	JCPL	614.5	Nuclear	01-Oct-18
Chesterfield 3	Dominion	97.5	Steam-Coal	01-Dec-18
Chesterfield 4	Dominion	163.0	Steam-Coal	01-Dec-18
Possum Point 3	Dominion	96.0	Steam-Natural Gas	01-Dec-18
Possum Point 4	Dominion	220.0	Steam-Natural Gas	01-Dec-18
Cumberland County Landfill Generator U1	AECO	4.0	RICE-Other	01-Jan-19
Pleasants Power Station U1	APS	639.0	Steam-Coal	01-Jan-19
Pleasants Power Station U2	APS	639.0	Steam-Coal	01-Jan-19
Spruance NUG1 (aka Spruance 1 Rich 1-2)	Dominion	115.5	Steam-Coal	12-Jan-19
Spruance NUG2 (aka Spruance 2 Rich 3-4)	Dominion	85.0	Steam-Coal	12-Jan-19
Hopewell James River Cogeneration	Dominion	89.0	Steam-Coal	31-Mar-19
BL England 2	AECO	155.0	Steam-Coal	30-Apr-19
MH50 Markus Hook Co-gen	PECO	50.8	Steam-Natural Gas	01-Jun-19
Three Mile Island Unit 1 Nuclear Generating Station	Met-Ed	805.0	Nuclear	30-Sep-19
Davis Besse U1 Nuclear Generating Unit	ATSI	894.0	Nuclear	31-May-20
Sammis 1-4	ATSI	640.0	Steam-Coal	31-May-20
Wagner 2	BGE	135.0	Steam-Coal	01-Jun-20
Colver Power Project	PENELEC	110.0	Steam-Coal	01-Sep-20
Bay Shore 1	ATSI	136.0	Steam-Coal	01-Oct-20
Edgecomb NUG (aka Edgecomb Rocky 1-2)	Dominion	115.5	Steam-Coal	31-Oct-20
Perry U1 Nuclear Generating Unit	ATSI	1,240.0	Nuclear	31-May-21
Beaver Valley U1 Nuclear Generating Unit	DLCO	892.0	Nuclear	31-May-21
Beaver Valley U2 Nuclear Generating Unit	DLCO	885.0	Nuclear	31-Oct-21
Total		9,227.8		

Table 12-9 shows the capacity, average size, and average age of units retiring in PJM, from 2011 through 2021, while Table 12-10 shows these retirements by state. The majority, 68.7 percent, of all MW retiring during this period are coal fired steam units. These coal fired steam units have an average age of 53.6 years and an average size of 176.0 MW. Over half of the retiring coal fired steam units, 51.7 percent, are located in either Ohio or Pennsylvania. Retirements have generally consisted of smaller subcritical coal fired steam units and those without adequate environmental controls to remain viable in the future.

Table 12-9 Retirements by unit type: 2011 through 2021

Unit Type	Number of Units	Avg. Size (MW)	Avg. Age at Retirement (Years)	Total MW	Percent
Battery	2	20.5	7.0	41.0	0.1%
Combined Cycle	2	212.5	25.5	425.0	1.1%
Combustion Turbine	89	39.1	43.0	3,464.1	8.8%
Natural Gas	41	41.6	44.0	1,705.0	4.4%
Other	48	36.6	41.9	1,759.1	4.5%
Fuel Cell	0	0.0	0.0	0.0	0.0%
Hydro	1	0.5	113.8	0.5	0.0%
Pumped Storage	1	0.5	113.8	0.5	0.0%
Run of River	0	0.0	0.0	0.0	0.0%
Nuclear	6	888.4	41.6	5,330.5	13.6%
RICE	20	4.1	28.4	81.2	0.2%
RICE - Oil	10	4.4	45.7	44.1	0.1%
RICE - Other	10	3.7	11.0	37.1	0.1%
Solar	0	0.0	0.0	0.0	0.0%
Steam	178	134.3	44.6	29,833.4	76.1%
Biomass	4	33.0	19.8	132.0	0.3%
Coal	153	176.0	53.6	26,922.1	68.7%
Natural Gas	17	112.8	59.6	1,917.3	4.9%
Oil	4	215.5	45.5	862.0	2.2%
Wind	1	10.4	15.6	10.4	0.0%
Total	299	131.1	47.8	39,186.1	100.0%

Table 12-10 Retirements (MW) by unit type and state: 2011 through 2021

State	Battery	Combined Cycle	CT- Natural		Hydro- Pumped Storage	Nuclear	RICE-Oil	RICE- Other	Steam- Biomass	Steam- Coal	Steam- Natural		Wind	Total
			Gas	CT-Other							Gas	Oil		
DC	0.0	0.0	0.0	240.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	548.0	0.0	788.0
DE	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	254.0	34.0	0.0	0.0	288.0
IL	0.0	0.0	0.0	0.0	0.0	0.0	0.0	12.5	0.0	1,624.0	0.0	0.0	0.0	1,636.5
IN	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	982.0	0.0	0.0	0.0	982.0
KY	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	995.0	0.0	0.0	0.0	995.0
MD	0.0	0.0	115.0	66.6	0.0	0.0	0.0	0.8	0.0	635.0	74.0	0.0	0.0	891.4
NC	0.0	0.0	0.0	31.0	0.0	0.0	0.0	0.0	0.0	324.5	0.0	0.0	0.0	355.5
NJ	0.0	158.0	1,590.0	1,040.2	0.5	614.5	8.0	13.8	0.0	1,543.0	932.5	148.0	0.0	6,048.5
OH	40.0	0.0	0.0	262.0	0.0	2,134.0	19.3	0.0	0.0	9,248.6	0.0	0.0	0.0	11,703.9
PA	1.0	0.0	0.0	52.0	0.0	2,582.0	13.9	8.0	49.0	4,658.0	333.8	166.0	10.4	7,874.1
VA	0.0	267.0	0.0	67.3	0.0	0.0	2.9	2.0	83.0	2,739.0	543.0	0.0	0.0	3,704.2
WV	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	3,919.0	0.0	0.0	0.0	3,919.0
Total	41.0	425.0	1,705.0	1,759.1	0.5	5,330.5	44.1	37.1	132.0	26,922.1	1,917.3	862.0	10.4	39,186.1

Generation Deactivations in 2018

Table 12-11 shows the units that were deactivated in the first six months of 2018.

Table 12-11 Unit deactivations: January through June, 2018²⁰

Company	Unit Name	ICAP (MW)	Unit Type	Zone Name	Age (Years)	Retirement Date
Biogas Energy Solutions, LLC	Dixon Lee Landfill Generator	4.0	RICE-Other	ComEd	4.8	10-Jan-18
Rockland Capital Energy Investments, LLC	BL England 3	148.0	Steam-Oil	AECO	43.2	24-Jan-18
Riverstone Holdings LLC	Brunner Island Diesels	8.2	RICE-Oil	PPL	50.8	25-Feb-18
Dominion Resources, Inc.	Buggs Island 1 (Mecklenberg)	69.0	Steam-Coal	Dominion	25.5	09-Apr-18
Dominion Resources, Inc.	Buggs Island 2 (Mecklenberg)	69.0	Steam-Coal	Dominion	25.5	09-Apr-18
Dominion Resources, Inc.	Bellemeade	267.0	Combined Cycle	Dominion	21.2	16-Apr-18
Dominion Resources, Inc.	Bremo 3	71.0	Steam-Natural Gas	Dominion	67.9	16-Apr-18
Dominion Resources, Inc.	Bremo 4	156.0	Steam-Natural Gas	Dominion	59.7	16-Apr-18
Evergreen Community Power LLC	Evergreen Power United Corstack	25.0	Steam-Biomass	Met-Ed	8.7	01-May-18
Biogas Energy Solutions, LLC	Morris Landfill Generator	2.1	RICE-Other	ComEd	5.0	31-May-18
South Jersey Industries, Inc.	Reichs Ford Road Landfill Generator	1.6	CT-Other	APS	8.1	31-May-18
American Electric Power Company, Inc.	Stuart 2	150.0	Steam-Coal	DAY	47.7	01-Jun-18
American Electric Power Company, Inc.	Stuart 3	150.0	Steam-Coal	DAY	46.1	01-Jun-18
American Electric Power Company, Inc.	Stuart 4	150.0	Steam-Coal	DAY	44.0	01-Jun-18
American Electric Power Company, Inc.	Stuart Diesels 1-4	2.4	RICE-Oil	DAY	48.7	01-Jun-18
Avenue Capital Group LLC	Crane 1	190.0	Steam-Coal	BGE	57.0	01-Jun-18
Avenue Capital Group LLC	Crane 2	195.0	Steam-Coal	BGE	55.4	01-Jun-18
Avenue Capital Group LLC	Crane GT1	14.0	CT-Other	BGE	50.9	01-Jun-18
Riverstone Holdings LLC	Bayonne Cogen Plant (CC)	158.0	Combined Cycle	PSEG	29.7	01-Jun-18
The AES Corporation	Killen 2	402.0	Steam-Coal	DAY	36.0	01-Jun-18
The AES Corporation	Killen CT	18.0	CT-Other	DAY	35.2	01-Jun-18
The AES Corporation	Stuart 2	202.0	Steam-Coal	DAY	47.7	01-Jun-18
The AES Corporation	Stuart 3	202.0	Steam-Coal	DAY	46.1	01-Jun-18
The AES Corporation	Stuart 4	202.0	Steam-Coal	DAY	44.0	01-Jun-18
The AES Corporation	Stuart Diesels 1-4	3.0	RICE-Oil	DAY	48.7	01-Jun-18
Vistra Energy Corp	Killen 2	198.0	Steam-Coal	DAY	36.0	01-Jun-18
Vistra Energy Corp	Killen CT	6.0	CT-Other	DAY	35.2	01-Jun-18
Vistra Energy Corp	Stuart 2	225.0	Steam-Coal	DAY	47.7	01-Jun-18
Vistra Energy Corp	Stuart 3	225.0	Steam-Coal	DAY	46.1	01-Jun-18
Vistra Energy Corp	Stuart 4	225.0	Steam-Coal	DAY	44.0	01-Jun-18
Vistra Energy Corp	Stuart Diesels 1-4	3.6	RICE-Oil	DAY	48.7	01-Jun-18
Public Service Enterprise Group Incorporated	Sewaren 1	104.0	Steam-Natural Gas	PSEG	69.6	06-Jun-18
Public Service Enterprise Group Incorporated	Sewaren 2	118.0	Steam-Natural Gas	PSEG	69.6	06-Jun-18
Public Service Enterprise Group Incorporated	Sewaren 3	107.0	Steam-Natural Gas	PSEG	68.7	06-Jun-18
Public Service Enterprise Group Incorporated	Sewaren 4	124.0	Steam-Natural Gas	PSEG	67.0	06-Jun-18
Total		4,194.9				

²⁰ The Killen CT and Stuart 2, 3 and 4 and Stuart Diesels 1-4 units are jointly owned. The MW displayed in each row represent the individual company's share of the retiring unit.

Existing Generation Mix

As of June 30, 2018, PJM had an installed capacity of 194,526.5 MW (Table 12-12). This measure differs from capacity market installed capacity because it includes energy-only units, excludes all external units, and uses nameplate values for solar and wind resources.

Table 12-12 Existing PJM capacity: June 30, 2018 (By zone and unit type (MW))²¹

Zone	Combined		CT -		RICE - Oil	RICE - Other	Fuel Cell	Hydro - Pumped Storage	Hydro - Run of River	Nuclear	Solar	Steam - Biomass	Steam - Coal	Steam - Natural Gas		Wind	Total
	Battery	Cycle	Natural Gas	CT - Other										- Oil	- Oil		
AECO	0.0	901.9	544.7	26.0	4.0	10.6	1.6	0.0	0.0	0.0	59.4	0.0	613.9	0.0	0.0	7.5	2,169.5
AEP	6.0	6,990.0	3,661.2	21.0	0.0	21.3	0.0	66.0	486.9	2,071.0	14.7	50.0	14,727.8	738.0	0.0	2,490.0	31,343.9
APS	78.9	1,129.0	1,223.3	2.0	29.6	18.3	0.0	0.0	129.2	0.0	55.1	0.0	5,409.0	0.0	0.0	1,191.5	9,265.9
ATSI	0.0	1,210.5	958.0	660.3	18.5	45.2	0.0	0.0	0.0	2,134.0	0.0	0.0	5,394.0	325.0	0.0	0.0	10,745.5
BGE	0.0	0.0	500.1	267.8	0.0	7.2	0.0	0.0	0.4	1,716.0	1.1	57.0	1,713.0	240.5	397.0	0.0	4,900.1
ComEd	128.5	2,621.1	6,940.3	226.2	0.0	38.3	0.0	0.0	0.0	10,473.5	9.0	0.0	4,124.1	1,326.0	0.0	3,187.9	29,074.9
DAY	0.0	0.0	1,344.5	0.0	34.0	4.5	0.0	0.0	0.0	0.0	1.1	0.0	0.0	0.0	0.0	0.0	1,384.1
DEOK	20.0	522.2	598.0	56.0	0.0	4.8	0.0	0.0	112.0	0.0	0.0	0.0	1,857.0	47.0	0.0	0.0	3,217.0
DLCO	0.0	244.0	0.0	15.0	0.0	0.0	0.0	0.0	6.3	1,777.0	0.0	0.0	565.0	0.0	0.0	0.0	2,607.3
Dominion	0.0	7,499.6	3,835.3	266.4	39.0	112.8	0.0	3,003.0	586.3	3,581.3	495.4	451.4	4,705.6	351.0	1,586.0	208.0	26,721.1
DPL	0.0	1,742.5	1,298.2	478.2	88.0	14.1	30.0	0.0	0.0	0.0	213.4	0.0	410.0	882.0	153.0	0.0	5,309.4
EKPC	0.0	0.0	774.0	0.0	0.0	0.0	0.0	0.0	70.0	0.0	0.0	0.0	1,687.0	0.0	0.0	0.0	2,531.0
JCPL	0.0	2,402.5	531.1	232.0	0.0	16.1	0.4	400.0	0.0	614.5	269.0	10.0	0.0	0.0	0.0	0.0	4,475.6
Met-Ed	0.0	1,616.0	2.0	398.5	0.0	33.4	0.0	0.0	19.0	805.0	0.0	60.0	115.0	0.0	0.0	0.0	3,048.9
PECO	1.0	3,209.0	0.0	834.0	2.0	0.9	0.0	1,070.0	572.0	4,546.8	3.0	163.0	3.3	812.8	0.0	0.0	11,217.8
PENELEC	28.4	850.0	350.5	57.0	106.8	17.8	0.0	513.0	77.8	0.0	0.0	42.0	6,141.5	610.0	0.0	958.8	9,753.6
Pepco	0.0	1,710.0	764.2	308.0	0.0	11.1	0.0	0.0	0.0	0.0	0.0	52.0	2,433.0	1,164.1	0.0	0.0	6,442.4
PPL	20.0	4,570.5	252.0	150.1	17.0	19.7	0.0	0.0	706.6	2,520.0	15.0	34.0	2,642.9	2,449.0	10.0	216.5	13,623.3
PSEG	5.7	4,410.3	1,039.2	0.0	0.0	6.0	0.0	0.0	5.0	3,493.0	185.6	188.1	0.0	3.0	0.0	0.0	9,335.8
XIC	0.0	0.0	691.6	0.0	0.0	0.0	0.0	0.0	269.1	1,140.0	0.0	0.0	5,258.8	0.0	0.0	0.0	7,359.5
Total	288.5	41,629.1	25,308.2	3,998.5	338.9	382.0	32.0	5,052.0	3,040.6	34,872.1	1,321.8	1,107.5	57,800.9	8,948.4	2,146.0	8,260.2	194,526.5


²¹ The capacity described in this section refers to all capacity in PJM at the summer installed capacity rating, regardless of whether the capacity entered the RPM Auction. This table previously included external units.

Table 12-13 and Figure 12-2 show the age of PJM generators by unit type as of June 30, 2018. Units older than 40 years comprise 77,202.0 MW (39.7 percent) of the total capacity of 194,526.5 MW.

Table 12-13 PJM capacity (MW) by unit type and age (years): June 30, 2018

Age (years)	Battery	Combined Cycle	CT - Natural Gas	CT - Other	RICE - Oil	RICE - Other	Fuel Cell	Hydro - Pumped Storage	Hydro - Run of River	Nuclear	Solar	Steam - Biomass	Steam - Coal	Steam - Natural Gas	Steam - Oil	Wind	Total
Less than 20	288.5	36,653.6	20,816.2	799.9	128.4	341.6	32.0	0.0	339.2	0.0	1,321.8	149.4	3,564.0	82.0	0.0	8,260.2	72,776.6
20 to 40	0.0	4,443.5	3,789.8	217.2	37.0	40.4	0.0	3,003.0	385.2	18,212.7	0.0	958.1	12,810.2	650.8	0.0	0.0	44,547.9
40 to 60	0.0	532.0	702.2	2,981.4	173.5	0.0	0.0	2,049.0	340.0	16,659.4	0.0	0.0	38,191.4	7,453.1	2,146.0	0.0	71,228.0
Greater than 60	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1,976.2	0.0	0.0	0.0	3,235.3	762.5	0.0	0.0	5,974.0
Total	288.5	41,629.1	25,308.2	3,998.5	338.9	382.0	32.0	5,052.0	3,040.6	34,872.1	1,321.8	1,107.5	57,800.9	8,948.4	2,146.0	8,260.2	194,526.5

Figure 12-2 PJM capacity (MW) by age (years): June 30, 2018

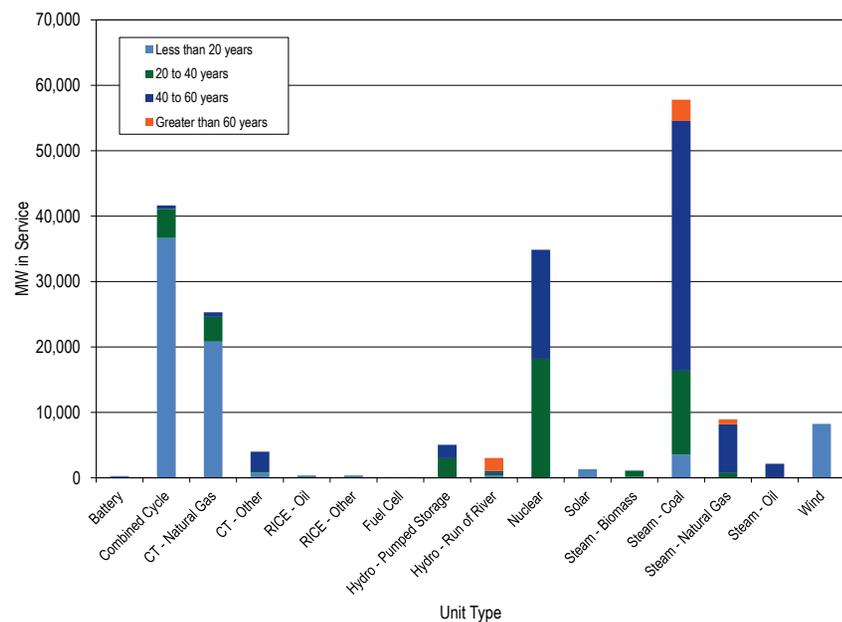

Generation and Transmission Interconnection Planning Process

PJM made changes to the queue process in May 2012.²² These changes included reducing the length of the queues, creating an alternate queue for some small projects, and adjustments to the rules regarding suspension rights and Capacity Interconnection Rights (CIR). PJM staff reported on June 11, 2015, that due to these and other process improvements, the study backlog has been significantly reduced.

Interconnection Queue Analysis

In the study phase of the interconnection planning process, a series of studies are performed to determine the feasibility, impact, and cost of projects in the queue. Table 12-14 is an overview of PJM’s study process. System impact and facilities studies are often redone when a project is withdrawn in order to determine the impact on the projects remaining in the queue.

²² See PJM Interconnection, LLC, Docket No. ER12-1177 (Feb. 29, 2012).

Table 12-14 PJM generation planning process

Process Step	Start on	Financial Obligation	Days for PJM to Complete	Days for Applicant to Decide Whether to Continue
Feasibility Study	Close of current queue	Cost of study (partially refundable deposit)	90	30
System Impact Study	Upon acceptance of the System Impact Study Agreement	Cost of study (partially refundable deposit)	120	30
Facilities Study	Upon acceptance of the Facilities Study Agreement	Cost of study (refundable deposit)	Varies	60
Schedule of Work	Upon acceptance of Interconnection Service Agreement (ISA)	Letter of credit for upgrade costs	Varies	37
Construction (only for new generation)	Upon acceptance of Interconnection Construction Service Agreement (ICSA)	None	Varies	NA

Manual 14B requires PJM to apply a commercial probability factor at the feasibility study stage to improve the accuracy of capacity and cost estimates. The commercial probability factor is based on the historical incidence of projects dropping out of the queue at the impact study stage.²³ The impact and facilities studies are performed using the full amount of planned generation in the queues. The actual withdrawal rates are shown in Table 12-15 and Table 12-16.

Withdrawn Projects

Table 12-15 shows the milestone status when projects were withdrawn, for all withdrawn projects. Of the 2,267 projects withdrawn, 1,110 (49.0 percent) were withdrawn before the system impact study was completed. Once an Interconnection Service Agreement (ISA) or a Wholesale Market Participation Agreement (WMPA) is executed, the financial obligation for any necessary transmission upgrades cannot be retracted.^{24 25} Of the 2,267 projects withdrawn, 425 (18.7 percent) were withdrawn after the completion of a Construction Service Agreement.

Table 12-15 Last milestone at time of withdrawal: January 1997 through June 2018

Milestone Completed	Projects Withdrawn	Percent	Average Days	Maximum Days
Never Started	368	16.2%	93	868
Feasibility Study	742	32.7%	272	1,633
System Impact Study	461	20.3%	754	3,248
Facilities Study	271	12.0%	1,069	3,454
Construction Service Agreement (CSA) or beyond	425	18.7%	1,236	4,249
Total	2,267	100.0%		

Table 12-16 and Table 12-17 show the time spent at various stages in the queue process and the completion time for the studies performed. For completed projects, there is an average time of 1,017 days, or 2.8 years, between entering a queue and going into service. For withdrawn projects, there is an average time of 617 days, or 1.7 years, between entering a queue and withdrawing.

23 See PJM, "Manual 14B: PJM Region Transmission Planning Process," Rev. 41 (Oct. 26, 2017), p.82.

24 "Generators planning to connect to the local distribution systems at locations that are not under FERC jurisdiction and wish to participate in PJM's market need to execute a PJM Wholesale Market Participation Agreement (WMPA)..." instead of an ISA. See PJM, "Manual 14C: Generation and Transmission Interconnection Facility Construction," Rev. 12 (June 22, 2017).

25 See PJM, "Manual 14C: Generation and Transmission Interconnection Facility Construction," Rev. 12 (June 22, 2017).

Table 12-16 Average project queue times (days): June 30, 2018²⁶

Status	Average (Days)	Standard Deviation	Minimum	Maximum
Active	501	609	0	4,211
In-Service	1,017	728	0	4,024
Suspended	1,500	905	366	4,177
Under Construction	1,820	1,073	486	4,933
Withdrawn	617	689	0	4,249

Average Time in Queue

Table 12-17 presents information on the time in the stages of the queue for those projects not yet in service or already withdrawn. Of the 867 projects in the queue as of June 30, 2018, 182 (21.0 percent) had a completed feasibility study and 296 (34.1 percent) were under construction.

Table 12-17 PJM generation planning summary: June 30, 2018

Milestone Reached	Number of Projects	Percent of Total Projects	Average Days	Maximum Days
Under Review	178	20.5%	32	185
Feasibility Study	182	21.0%	383	1,195
System Impact Study	172	19.8%	685	3,471
Facilities Study	39	4.5%	1,116	3,279
Construction Service Agreement (CSA) or beyond	296	34.1%	1,424	4,933
Total	867	100.0%		

Completion Rates

The probability of a project going into service increases as each step of the planning process is completed. Table 12-18 shows the historic completion rates (MW energy) by unit type for projects that have completed the system impact study and construction service agreement stages. For example, of all wind projects to ever enter the queue and complete the system impact study stage, 16.9 percent of the queued MW have gone into service. The completion rate for wind projects increases to 51.5 percent when wind projects complete the construction service agreement.

²⁶ The queue data shows that some projects were withdrawn and a withdrawal date was not identified. These projects were removed for the purposes of this analysis.

Table 12-18 Historic completion rates (MW energy) by unit type for projects with a completed SIS and CSA: January 1997 through June 2018

Unit Type	Completion Rate (SIS)	Completion Rate (CSA)
Battery	23.3%	60.4%
CC	34.1%	85.0%
CT - Natural Gas	34.0%	97.4%
CT - Oil	33.6%	90.4%
CT - Other	37.7%	57.4%
Fuel Cell	41.6%	43.5%
Hydro - Run of River	51.9%	72.3%
Nuclear	34.9%	51.2%
RICE - Natural Gas	9.5%	28.3%
RICE - Oil	62.5%	81.6%
RICE - Other	34.3%	40.5%
Solar	16.8%	36.5%
Steam - Coal	13.3%	36.8%
Steam - Natural Gas	67.7%	67.7%
Steam - Other	21.1%	42.8%
Wind	16.9%	51.5%

Queue Analysis by Fuel Group

The time it takes to complete a study depends on the backlog and the number of projects in the queue, but not on the size of the project. Table 12-19 shows the number of projects that entered the queue by year. The number of queue entries has increased during the past several years, primarily by renewable projects (solar, hydro, storage, biomass, wind). Of the 1,270 projects entered in 2015, 2016, 2017 and the first six months of 2018, 996 projects, 78.4 percent, were renewable. Of the 208 projects entered in the first six months of 2018, 181 projects, 87.0 percent, were renewable.

Table 12-19 Number of projects entered in the queue: June 30, 2018

Year Entered	Fuel Group			Total
	Nuclear	Renewable	Traditional	
1997	2	0	11	13
1998	0	0	18	18
1999	1	5	84	90
2000	2	3	78	83
2001	4	6	81	91
2002	3	15	33	51
2003	1	34	18	53
2004	4	17	33	54
2005	3	75	55	133
2006	9	67	81	157
2007	9	65	145	219
2008	3	109	104	216
2009	10	109	54	173
2010	5	375	61	441
2011	6	268	81	355
2012	2	70	87	159
2013	1	75	78	154
2014	0	121	71	192
2015	0	195	113	308
2016	2	320	77	399
2017	2	300	53	355
2018	1	181	26	208
Total	70	2,410	1,442	3,922

Renewable projects comprise the majority of projects entered in the queue, as well as what is currently active in the queue, and renewable projects are 45.6 percent of the nameplate MW currently active, suspended or under construction in the queue (Table 12-20).

Table 12-20 Queue details by fuel group: June 30, 2018

Fuel Group	Number of Projects	Percent of Projects	MW	Percent MW
Nuclear	9	1.0%	167.5	0.2%
Renewable	650	75.0%	48,613.0	45.6%
Traditional	208	24.0%	57,775.6	54.2%
Total	867	100.0%	106,556.0	100.0%

Queue Analysis by Unit Type and Project Classification

Table 12-21 shows the current status of all generation queue projects by unit type and project classification from January 1, 1997, through June 30, 2018. For example, between January 1, 1997 and June 30, 2018, 159 nameplate capacity upgrades at Combined Cycle facilities have completed the queue process and are in service.

Since 1997, there have been a total of 3,922 projects in PJM generation queues. A total of 3,164 projects have been classified as new generation and 758 projects have been classified as upgrades. Wind, solar and natural gas projects have accounted for 3,087 projects, or 78.7 percent, of all 3,922 generation queue projects.

Table 12-21 Status of all generation queue projects: January 1997 through June 2018

Project Status	Project Classification	Number of Projects																	
		Battery	CC	CT - Natural Gas	CT - Oil	CT - Other	Fuel Cell	Hydro - Pumped Storage	Hydro - Run of River	Nuclear	RICE - Natural Gas	RICE - Oil	RICE - Other	Solar	Steam - Coal	Steam - Natural Gas	Steam - Other	Wind	Total
In Service	New Generation	17	100	2	4	74	3	0	10	1	1	5	3	125	9	1	6	65	426
	Upgrade	4	159	4	14	21	0	0	18	42	3	3	4	16	50	2	6	15	361
Under Construction	New Generation	26	14	0	0	1	0	0	3	0	3	0	0	22	0	1	0	16	86
	Upgrade	2	14	1	0	0	0	0	0	0	0	0	1	1	2	0	1	1	23
Suspended	New Generation	7	12	1	0	0	0	0	0	0	2	0	0	34	0	0	1	14	71
	Upgrade	2	6	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1	9
Withdrawn	New Generation	94	397	13	9	81	18	0	39	9	18	12	14	885	55	1	33	390	2,068
	Upgrade	14	79	5	13	13	2	0	4	9	0	2	2	22	14	0	2	19	200
Active	New Generation	17	41	10	1	0	9	1	1	1	5	0	2	357	0	0	0	68	513
	Upgrade	6	49	27	0	0	0	1	1	8	2	1	2	40	4	3	1	20	165
Total Projects	New Generation	161	564	26	14	156	30	1	53	11	29	17	19	1,423	64	3	40	553	3,164
	Upgrade	28	307	37	27	34	2	1	23	59	5	6	9	79	70	5	10	56	758

Table 12-22 shows the MW in Table 12-21 by share of classification as new generation or upgrade. Within a unit type the shares of upgrades add to 100 percent and the shares of new generation add to 100 percent. For example, 78.3 percent of all hydro – run of river projects classified as upgrades are currently in service in PJM, 17.4 percent of hydro – run of river CT upgrades were withdrawn and 4.3 percent of hydro – run of river upgrades are active in the queue.

Table 12-22 Status of all generation queue projects as a percent of total projects by classification: January 1997 through June 2018

Project Status	Project Classification	Percent of Projects																	
		Battery	CC	CT - Natural Gas	CT - Oil	CT - Other	Fuel Cell	Hydro - Pumped Storage	Hydro - Run of River	Nuclear	RICE - Natural Gas	RICE - Oil	RICE - Other	Solar	Steam - Coal	Steam - Natural Gas	Steam - Other	Wind	Total
In Service	New Generation	10.6%	17.7%	7.7%	28.6%	47.4%	10.0%	0.0%	18.9%	9.1%	3.4%	29.4%	15.8%	8.8%	14.1%	33.3%	15.0%	11.8%	13.5%
	Upgrade	14.3%	51.8%	10.8%	51.9%	61.8%	0.0%	0.0%	78.3%	71.2%	60.0%	50.0%	44.4%	20.3%	71.4%	40.0%	60.0%	26.8%	47.6%
Under Construction	New Generation	16.1%	2.5%	0.0%	0.0%	0.6%	0.0%	0.0%	5.7%	0.0%	10.3%	0.0%	0.0%	1.5%	0.0%	33.3%	0.0%	2.9%	2.7%
	Upgrade	7.1%	4.6%	2.7%	0.0%	0.0%	0.0%	0.0%	0.0%	0.0%	0.0%	0.0%	11.1%	1.3%	2.9%	0.0%	10.0%	1.8%	3.0%
Suspended	New Generation	4.3%	2.1%	3.8%	0.0%	0.0%	0.0%	0.0%	0.0%	0.0%	6.9%	0.0%	0.0%	2.4%	0.0%	0.0%	2.5%	2.5%	2.2%
	Upgrade	7.1%	2.0%	0.0%	0.0%	0.0%	0.0%	0.0%	0.0%	0.0%	0.0%	0.0%	0.0%	0.0%	0.0%	0.0%	0.0%	1.8%	1.2%
Withdrawn	New Generation	58.4%	70.4%	50.0%	64.3%	51.9%	60.0%	0.0%	73.6%	81.8%	62.1%	70.6%	73.7%	62.2%	85.9%	33.3%	82.5%	70.5%	65.4%
	Upgrade	50.0%	25.7%	13.5%	48.1%	38.2%	100.0%	0.0%	17.4%	15.3%	0.0%	33.3%	22.2%	27.8%	20.0%	0.0%	20.0%	33.9%	26.4%
Active	New Generation	10.6%	7.3%	38.5%	7.1%	0.0%	30.0%	100.0%	1.9%	9.1%	17.2%	0.0%	10.5%	25.1%	0.0%	0.0%	0.0%	12.3%	16.2%
	Upgrade	21.4%	16.0%	73.0%	0.0%	0.0%	0.0%	100.0%	4.3%	13.6%	40.0%	16.7%	22.2%	50.6%	5.7%	60.0%	10.0%	35.7%	21.8%

Table 12-23 shows the nameplate generating capacity of projects in the PJM generation queue by technology type and project classification. For example, the 390 new generation wind projects that have been withdrawn from the queue as of June 30, 2018, listed in Table 12-21 constitute 61,876.4 MW of nameplate capacity. The 476 new generation and upgrade combined cycle projects that have been withdrawn in the same time period constitute 197,259.7 MW of nameplate capacity.

Table 12-23 Status of all generation capacity (MW) in the PJM generation queue: January 1997 through June 2018

Project Status	Project Classification	Project MW																	Total
		Battery	CC	CT - Natural		CT - Oil	Other	Fuel Cell	Hydro - Pumped Storage	Hydro - Run of River	Nuclear	RICE - Natural		RICE - Oil	RICE - Other	Solar	Steam - Coal	Steam - Natural Gas	
In Service	New Generation	155.4	30,393.8	342.0	607.0	452.2	1.9	0.0	572.9	9.0	19.9	62.0	11.0	1,272.3	1,378.0	16.5	223.8	7,057.9	42,575.6
	Upgrade	42.4	7,258.4	151.1	125.8	601.9	0.0	0.0	627.8	3,912.8	2.2	32.8	1.9	19.4	848.5	40.0	60.7	33.7	13,759.3
Under Construction	New Generation	86.6	9,701.5	0.0	0.0	3.2	0.0	0.0	23.1	0.0	41.2	0.0	0.0	294.4	0.0	590.0	0.0	2,661.9	13,401.8
	Upgrade	32.0	1,020.1	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	48.0	0.0	62.5	0.0	1,162.6
Suspended	New Generation	43.3	5,821.7	19.9	0.0	0.0	0.0	0.0	0.0	0.0	39.8	0.0	0.0	457.9	0.0	0.0	16.0	2,831.7	9,230.3
	Upgrade	23.0	880.1	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	100.0	1,003.1
Withdrawn	New Generation	1,390.8	188,605.6	1,535.6	1,721.0	1,244.2	3.8	0.0	1,986.9	8,161.0	288.4	63.9	77.0	19,763.5	33,511.6	27.0	1,034.9	61,876.4	321,291.6
	Upgrade	301.1	8,654.2	273.5	589.0	72.5	0.9	0.0	57.1	916.0	0.0	13.0	6.0	652.1	865.0	0.0	37.1	386.3	12,823.8
Active	New Generation	375.1	31,142.6	1,655.7	14.0	0.0	1.9	13.6	15.0	28.0	91.9	0.0	11.6	22,006.3	0.0	0.0	0.0	16,256.2	71,611.9
	Upgrade	241.0	5,014.8	1,375.0	0.0	0.0	0.0	34.0	5.5	139.5	3.0	4.0	4.0	1,533.1	81.0	94.0	40.0	1,577.5	10,146.4
Total Projects	New Generation	2,051.1	265,665.1	3,553.2	2,342.0	1,699.6	7.6	13.6	2,597.9	8,198.0	481.2	125.9	99.6	43,794.4	34,889.6	633.5	1,274.7	90,684.1	458,111.2
	Upgrade	639.5	22,827.6	1,799.6	714.8	674.3	0.9	34.0	690.4	4,968.3	5.2	49.8	11.9	2,204.6	1,842.5	134.0	200.3	2,097.4	38,895.1

Table 12-24 shows the MW in Table 12-23 by share by classification as new generation or upgrade. Within a unit type the shares of upgrades add to 100 percent and the shares of new generation add to 100 percent. For example, 68.2 percent of wind projects classified as new generation have been withdrawn from the queue between January 1, 1997, and June 30, 2018.

Table 12-24 Status of all generation queue projects as percent of total MW in project classification: January 1997 through June 2018

Project Status	Project Classification	Percent of Total Projects by Classification																	Total
		Battery	CC	CT - Natural		CT - Oil	Other	Fuel Cell	Hydro - Pumped Storage	Hydro - Run of River	Nuclear	RICE - Natural		RICE - Oil	RICE - Other	Solar	Steam - Coal	Steam - Natural Gas	
In Service	New Generation	7.6%	11.4%	9.6%	25.9%	26.6%	25.5%	0.0%	22.1%	0.1%	4.1%	49.2%	11.0%	2.9%	3.9%	2.6%	17.6%	7.8%	9.3%
	Upgrade	6.6%	31.8%	8.4%	17.6%	89.3%	0.0%	0.0%	90.9%	78.8%	42.3%	65.8%	16.0%	0.9%	46.1%	29.9%	30.3%	1.6%	35.4%
Under Construction	New Generation	4.2%	3.7%	0.0%	0.0%	0.2%	0.0%	0.0%	0.9%	0.0%	8.6%	0.0%	0.0%	0.7%	0.0%	93.1%	0.0%	2.9%	2.9%
	Upgrade	5.0%	4.5%	0.0%	0.0%	0.0%	0.0%	0.0%	0.0%	0.0%	0.0%	0.0%	0.0%	0.0%	2.6%	0.0%	31.2%	0.0%	3.0%
Suspended	New Generation	2.1%	2.2%	0.6%	0.0%	0.0%	0.0%	0.0%	0.0%	0.0%	8.3%	0.0%	0.0%	1.0%	0.0%	0.0%	1.3%	3.1%	2.0%
	Upgrade	3.6%	3.9%	0.0%	0.0%	0.0%	0.0%	0.0%	0.0%	0.0%	0.0%	0.0%	0.0%	0.0%	0.0%	0.0%	0.0%	4.8%	2.6%
Withdrawn	New Generation	67.8%	71.0%	43.2%	73.5%	73.2%	49.7%	0.0%	76.5%	99.5%	59.9%	50.8%	77.3%	45.1%	96.1%	4.3%	81.2%	68.2%	70.1%
	Upgrade	47.1%	37.9%	15.2%	82.4%	10.7%	100.0%	0.0%	8.3%	18.4%	0.0%	26.1%	50.4%	29.6%	46.9%	0.0%	18.5%	18.4%	33.0%
Active	New Generation	18.3%	11.7%	46.6%	0.6%	0.0%	24.7%	100.0%	0.6%	0.3%	19.1%	0.0%	11.6%	50.2%	0.0%	0.0%	0.0%	17.9%	15.6%
	Upgrade	37.7%	22.0%	76.4%	0.0%	0.0%	0.0%	100.0%	0.8%	2.8%	57.7%	8.0%	33.6%	69.5%	4.4%	70.1%	20.0%	75.2%	26.1%

Table 12-25 shows the project MW that entered the PJM generation queue by unit type and year of entry. Starting in 2016, combined cycle, wind, and solar projects accounted for the majority of all new projects entering the generation queue.

Table 12-25 Queue project MW by unit type and queue entry year: January 1997 through June 2018

Year	Battery	CC	CT - Natural Gas	CT - Oil	CT - Other	Fuel Cell	Hydro - Pumped Storage	Hydro - Run of River	Nuclear	RICE - Natural Gas	RICE - Oil	RICE - Other	Solar	Steam - Coal	Steam - Natural Gas	Steam - Other	Wind	Total
1997	0.0	4,469.0	0.0	315.0	0.0	0.0	0.0	0.0	50.0	0.0	0.0	0.0	0.0	6.0	0.0	0.0	0.0	4,840.0
1998	0.0	8,781.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	8,781.0
1999	0.0	31,824.8	0.0	0.0	535.0	0.0	0.0	196.0	45.0	0.0	0.0	0.0	0.0	47.0	0.0	0.0	115.4	32,763.2
2000	0.0	21,640.9	0.0	31.5	10.0	0.0	0.0	0.0	95.0	0.0	0.0	0.0	0.0	37.0	0.0	0.0	95.6	21,909.9
2001	0.0	25,685.7	0.0	0.0	15.6	0.0	0.0	107.0	90.0	0.0	0.0	0.0	0.0	1,244.6	0.0	0.0	252.9	27,395.8
2002	0.0	4,173.7	0.0	0.0	75.0	0.0	0.0	293.0	236.0	0.0	23.3	0.0	0.0	1,895.0	0.0	0.0	790.9	7,486.9
2003	0.0	2,395.3	0.0	0.0	33.4	0.0	0.0	2.0	0.0	0.0	8.0	0.0	0.0	522.0	0.0	165.0	1,002.9	4,128.6
2004	0.0	3,653.3	0.0	0.0	66.6	0.0	0.0	0.0	1,911.0	0.0	55.5	0.0	0.0	1,187.0	0.0	0.0	1,613.7	8,487.1
2005	0.0	7,038.5	0.0	251.0	119.1	0.0	0.0	514.2	242.0	0.0	30.0	0.0	0.0	6,360.0	0.0	25.0	6,020.0	20,599.9
2006	0.0	4,642.4	0.0	600.0	109.7	0.0	0.0	159.0	6,894.0	0.0	7.5	0.0	0.0	9,586.0	0.0	314.9	7,650.7	29,964.2
2007	0.0	15,240.4	0.0	211.9	245.4	0.0	0.0	271.4	368.0	0.0	4.0	0.0	3.3	9,078.0	0.0	32.4	18,525.6	43,980.4
2008	121.0	26,136.7	0.0	1,113.0	523.3	0.0	0.0	1,254.5	105.0	0.0	0.0	0.0	66.3	1,198.0	0.0	189.8	11,199.7	41,907.3
2009	34.0	5,572.4	0.0	64.0	226.4	0.0	0.0	133.9	1,933.8	0.0	18.0	3.0	636.5	1,273.0	0.0	148.0	6,672.6	16,715.6
2010	104.4	9,356.6	0.0	7.9	133.4	0.0	0.0	132.6	426.0	0.0	2.4	0.0	3,690.0	64.0	0.0	220.0	9,908.4	24,045.7
2011	24.1	20,384.0	0.0	0.0	189.9	0.0	0.0	30.0	182.0	0.0	14.0	0.0	2,022.9	357.0	0.0	109.0	5,576.4	28,889.3
2012	142.6	18,494.1	0.0	42.5	52.4	0.0	0.0	11.8	369.0	0.0	0.0	0.0	286.6	1,837.0	0.0	143.1	1,529.8	22,908.8
2013	217.4	11,734.7	0.0	5.0	12.8	0.0	0.0	89.4	102.0	19.9	0.0	0.0	231.7	158.0	40.0	44.7	1,407.9	14,063.4
2014	246.9	11,792.0	1,532.5	401.0	21.0	0.0	0.0	60.5	0.0	25.5	0.0	4.4	1,445.7	1,730.5	27.0	43.1	1,763.7	19,093.8
2015	546.9	27,540.8	1,324.5	0.0	0.9	2.3	34.0	0.0	0.0	320.4	13.0	31.4	2,911.6	47.0	606.5	0.0	2,160.6	35,539.7
2016	111.1	18,849.0	1,392.0	0.0	0.0	3.4	0.0	12.5	50.3	23.5	0.0	38.9	11,771.5	80.0	77.0	0.0	3,467.5	35,876.7
2017	24.6	5,488.1	704.0	0.0	4.1	2.9	0.0	20.5	39.1	97.1	0.0	33.8	13,899.0	14.0	17.0	0.0	5,602.0	25,946.3
2018	1,117.6	3,599.4	399.8	14.0	0.0	0.0	13.6	0.0	28.1	0.0	0.0	0.0	9,033.8	11.0	0.0	40.0	7,425.3	21,682.6
Total	2,690.6	288,492.7	5,352.8	3,056.8	2,374.0	8.5	47.6	3,288.3	13,166.3	486.4	175.7	111.5	45,999.0	36,732.1	767.5	1,475.0	92,781.6	497,006.3

Combined Cycle Project Analysis

Table 12-26 shows the status of all combined cycle projects by number of projects that entered PJM generation queues from January 1, 1997, through June 30, 2018, by zone. Of the 136 combined cycle projects classified either as new generation or upgrade currently active, suspended or under construction in the PJM generation queue, 50 projects (36.8 percent) are located within AEP, ComEd and APS.

Table 12-26 Status of all combined cycle queue projects: January 1997 through June 2018

Project Status	Project Classification	Number of Projects																				
		AECO	AEP	APS	ATSI	BGE	ComEd	DAY	DEOK	DLCO	Dominion	DPL	EKPC	JCPL	Met-Ed	PECO	PENELEC	Pepco	PPL	PSEG	RECO	Total
In Service	New Generation	7	4	7	1	6	2	0	2	0	6	9	0	8	3	6	8	7	12	12	0	100
	Upgrade	7	15	9	1	1	12	6	0	0	33	13	0	5	1	10	6	5	8	27	0	159
Under Construction	New Generation	1	0	1	1	0	0	0	0	1	1	0	0	0	1	2	1	2	2	1	0	14
	Upgrade	0	0	1	1	0	1	0	0	0	0	0	0	0	1	4	1	1	2	2	0	14
Suspended	New Generation	1	2	3	1	0	0	0	0	0	0	0	0	0	0	0	4	1	0	0	0	12
	Upgrade	0	0	2	0	0	0	0	0	0	0	1	0	1	0	0	0	2	0	0	0	6
Withdrawn	New Generation	19	18	40	10	8	9	0	1	2	16	16	3	23	25	43	39	33	39	51	2	397
	Upgrade	6	7	5	3	0	2	0	1	0	7	4	0	5	7	3	5	3	6	15	0	79
Active	New Generation	2	7	5	4	0	9	1	0	0	3	1	0	2	0	0	1	0	2	4	0	41
	Upgrade	3	8	6	4	0	5	0	0	0	7	0	0	4	2	1	3	1	4	1	0	49
Total Projects	New Generation	30	31	56	17	14	20	1	3	3	26	26	3	33	29	51	53	43	55	68	2	564
	Upgrade	16	30	23	9	1	20	6	1	0	47	18	0	15	11	18	15	12	20	45	0	307

Table 12-27 shows the status of all combined cycle projects by MW that entered PJM generation queues from January 1, 1997 through June 30, 2018, by zone. Of the 53,580.8 MW of combined cycle projects classified either as new generation or upgrade currently active, suspended or under construction in the PJM generation queue, 22,678.4 MW (42.3 percent) are located within AEP, ComEd and APS.

Table 12-27 Status of all combined cycle generation capacity (MW) in the PJM generation queue: January 1997 through June 2018

Project Status	Project Classification	Project MW																				
		AECO	AEP	APS	ATSI	BGE	ComEd	DAY	DEOK	DLCO	Dominion	DPL	EKPC	JCPL	Met-Ed	PECO	PENELEC	Pepco	PPL	PSEG	RECO	Total
In Service	New Generation	1,016.2	3,032.0	1,701.0	799.0	390.0	629.0	0.0	533.0	0.0	4,845.1	2,052.2	0.0	2,070.3	2,107.0	2,464.0	1,257.2	842.0	3,850.9	2,804.9	0.0	30,393.8
	Upgrade	265.7	343.0	857.7	40.0	2.5	864.0	60.0	0.0	0.0	1,702.7	196.0	0.0	224.0	10.0	854.5	117.0	121.1	481.3	1,118.9	0.0	7,258.4
Under Construction	New Generation	452.0	0.0	930.0	800.0	0.0	0.0	0.0	0.0	205.0	1,681.0	0.0	0.0	0.0	450.0	760.5	1,050.0	755.0	2,050.0	568.0	0.0	9,701.5
	Upgrade	0.0	0.0	0.0	161.0	0.0	12.6	0.0	0.0	0.0	0.0	0.0	0.0	0.0	35.0	167.0	50.0	64.5	370.0	160.0	0.0	1,020.1
Suspended	New Generation	235.0	1,579.0	1,729.9	1,152.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	231.8	894.0	0.0	0.0	0.0	5,821.7
	Upgrade	0.0	0.0	85.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	451.0	0.0	200.0	0.0	0.0	0.0	144.1	0.0	0.0	0.0	880.1
Withdrawn	New Generation	6,909.4	11,249.5	16,982.1	5,361.0	3,122.1	4,631.0	0.0	134.5	665.0	10,421.0	4,836.4	991.8	11,460.4	13,001.0	23,340.0	15,931.0	20,414.2	16,785.7	22,362.7	6.9	188,605.6
	Upgrade	115.4	711.0	579.0	86.0	0.0	75.0	0.0	36.0	0.0	305.3	668.0	0.0	253.0	1,742.0	240.0	1,040.6	85.0	500.0	2,217.9	0.0	8,654.2
Active	New Generation	946.0	5,595.0	2,766.0	3,835.0	0.0	6,549.2	1,150.0	0.0	0.0	3,544.5	600.0	0.0	1,532.2	0.0	0.0	18.3	0.0	1,515.0	3,091.4	0.0	31,142.6
	Upgrade	115.6	842.0	784.7	183.0	0.0	1,805.0	0.0	0.0	0.0	405.1	0.0	0.0	165.0	113.9	67.0	86.6	75.0	320.8	51.1	0.0	5,014.8
Total Projects	New Generation	9,558.6	21,455.5	24,109.0	11,947.0	3,512.1	11,809.2	1,150.0	667.5	870.0	20,491.6	7,488.6	991.8	15,062.9	15,558.0	26,564.5	18,488.3	22,905.2	24,201.6	28,827.0	6.9	265,665.1
	Upgrade	496.7	1,896.0	2,306.4	470.0	2.5	2,756.6	60.0	36.0	0.0	2,413.1	1,315.0	0.0	842.0	1,900.9	1,328.5	1,294.2	489.7	1,672.1	3,547.9	0.0	22,827.6

Combustion Turbine – Natural Gas Project Analysis

Table 12-28 shows the status of all combustion turbine natural gas projects by number of projects that entered PJM generation queues from January 1, 1997 through June 30, 2018, by zone. Of the 39 combustion turbine natural gas projects classified either as new generation or upgrade currently active, suspended or under construction in the PJM generation queue, 22 projects (56.4 percent) are located within AEP, ComEd and APS.

Table 12-28 Status of all combustion turbine – natural gas generation queue projects: January 1997 through June 2018

Project Status	Project Classification	Number of Projects																				
		AECO	AEP	APS	ATSI	BGE	ComEd	DAY	DEOK	DLCO	Dominion	DPL	EKPC	JCPL	Met-Ed	PECO	PENELEC	Pepco	PPL	PSEG	RECO	Total
In Service	New Generation	0	0	0	0	0	0	0	0	0	1	0	0	0	0	0	0	0	0	1	0	2
	Upgrade	0	1	0	0	0	1	0	0	0	0	1	0	0	1	0	0	0	0	0	0	4
Under Construction	New Generation	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	Upgrade	0	0	0	0	0	0	0	0	0	0	0	0	1	0	0	0	0	0	0	0	1
Suspended	New Generation	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1	0	0	0	0	1
	Upgrade	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
Withdrawn	New Generation	1	3	0	0	0	1	0	0	0	1	0	0	0	0	0	2	0	0	5	0	13
	Upgrade	1	1	0	1	0	0	0	0	0	0	0	0	0	1	0	1	0	0	0	0	5
Active	New Generation	1	1	0	0	1	2	0	0	0	2	0	1	0	0	0	1	0	1	0	0	10
	Upgrade	1	1	6	1	0	12	0	0	0	6	0	0	0	0	0	0	0	0	0	0	27
Total Projects	New Generation	2	4	0	0	1	3	0	0	0	4	0	1	0	0	0	4	0	1	6	0	26
	Upgrade	2	3	6	2	0	13	0	0	0	6	1	0	1	2	0	1	0	0	0	0	37

Table 12-29 shows the status of all combustion turbine natural gas projects by MW that entered PJM generation queues from January 1, 1997 through June 30, 2018, by zone. Of the 3,050.6 MW of combustion turbine natural gas projects classified either as new generation or upgrade currently active, suspended or under construction in the PJM generation queue, 1,616.0 MW (53.0 percent) are located within AEP, ComEd and APS.

Table 12-29 Status of all combustion turbine – natural gas generation capacity (MW) in the PJM generation queue: January 1997 through June 2018

Project Status	Project Classification	Project MW																				
		AECO	AEP	APS	ATSI	BGE	ComEd	DAY	DEOK	DLCO	Dominion	DPL	EKPC	JCPL	Met-Ed	PECO	PENELEC	Pepco	PPL	PSEG	RECO	Total
In Service	New Generation	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	340.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	2.0	0.0	342.0
	Upgrade	0.0	97.0	0.0	0.0	0.0	20.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	34.1	0.0	0.0	0.0	0.0	0.0	0.0	151.1
Under Construction	New Generation	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
	Upgrade	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Suspended	New Generation	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	19.9	0.0	0.0	0.0	0.0	19.9
	Upgrade	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Withdrawn	New Generation	7.5	66.0	0.0	0.0	0.0	10.0	0.0	0.0	0.0	54.0	0.0	0.0	0.0	0.0	0.0	258.0	0.0	0.0	1,140.1	0.0	1,535.6
	Upgrade	7.5	6.0	0.0	25.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	235.0	0.0	0.0	0.0	0.0	273.5
Active	New Generation	230.0	394.0	0.0	0.0	144.6	230.0	0.0	0.0	0.0	99.2	0.0	75.0	0.0	0.0	0.0	463.0	0.0	19.9	0.0	0.0	1,655.7
	Upgrade	158.0	19.0	120.0	70.0	0.0	853.0	0.0	0.0	0.0	155.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1,375.0
Total Projects	New Generation	237.5	460.0	0.0	0.0	144.6	240.0	0.0	0.0	0.0	493.2	0.0	75.0	0.0	0.0	0.0	740.9	0.0	19.9	1,142.1	0.0	3,553.2
	Upgrade	165.5	122.0	120.0	95.0	0.0	873.0	0.0	0.0	0.0	155.0	0.0	0.0	0.0	34.1	0.0	235.0	0.0	0.0	0.0	0.0	1,799.6

Wind Project Analysis

Table 12-30 shows the status of all wind generation projects that entered PJM generation queues from January 1, 1997 through June 30, 2018, by zone. Of the 80 wind projects to achieve in service status, 71 projects (88.8 percent) are located within ComEd, AEP, APS and PENELEC. Of the 120 wind projects currently active, suspended or under construction in the PJM generation queue, 97 projects (80.5 percent) are located within ComEd, AEP, APS and PENELEC.

Table 12-30 Status of all wind generation queue projects: January 1997 through June 2018

Project Status	Project Classification	Number of Projects																				
		AECO	AEP	APS	ATSI	BGE	ComEd	DAY	DEOK	DLCO	Dominion	DPL	EKPC	JCPL	Met-Ed	PECO	PENELEC	Pepco	PPL	PSEG	RECO	Total
In Service	New Generation	1	12	11	0	0	17	0	0	0	0	0	0	0	0	0	20	0	4	0	0	65
	Upgrade	0	0	3	0	0	2	0	0	0	0	0	0	0	0	0	6	0	4	0	0	15
Under Construction	New Generation	0	3	4	0	0	4	0	0	0	4	0	0	0	0	0	1	0	0	0	0	16
	Upgrade	0	0	1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1
Suspended	New Generation	0	6	3	1	0	2	0	0	0	1	0	0	0	0	0	1	0	0	0	0	14
	Upgrade	0	1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1
Withdrawn	New Generation	15	88	40	6	0	95	14	0	0	17	9	1	0	0	0	62	0	42	1	0	390
	Upgrade	1	0	6	0	0	3	0	0	0	2	0	0	0	0	0	5	0	2	0	0	19
Active	New Generation	1	25	4	4	0	22	1	0	0	1	2	0	2	0	0	1	0	5	0	0	68
	Upgrade	1	2	4	0	0	10	0	0	0	0	0	0	0	0	0	3	0	0	0	0	20
Total Projects	New Generation	17	134	62	11	0	140	15	0	0	23	11	1	2	0	0	85	0	51	1	0	553
	Upgrade	2	3	14	0	0	15	0	0	0	2	0	0	0	0	0	14	0	6	0	0	56

Table 12-31 shows the wind project capacity in MW of all wind generation projects that have entered the PJM generation queue from January 1, 1997 through June 30, 2018, by zone. Of the 7,091.6 MW of wind generation capacity to achieve the in service status, 6,857.6 MW (96.7 percent) of nameplate capacity is located within ComEd, AEP, APS and PENELEC. Of the 23,427.3 MW of wind generation capacity currently active, suspended or under construction in the PJM generation queue, 17,277.6 MW of generation capacity (73.7 percent) is located within ComEd, AEP, APS and PENELEC.

Table 12-31 Status of all wind generation capacity (MW) in the PJM generation queue: January 1997 through June 2018

Project Status	Project Classification	Project MW																				
		AECO	AEP	APS	ATSI	BGE	ComEd	DAY	DEOK	DLCO	Dominion	DPL	EKPC	JCPL	Met-Ed	PECO	PENELEC	Pepco	PPL	PSEG	RECO	Total
In Service	New Generation	7.5	2,438.7	1,004.0	0.0	0.0	2,413.5	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	995.0	0.0	199.2	0.0	0.0	7,057.9
	Upgrade	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	6.4	0.0	27.3	0.0	0.0	33.7
Under Construction	New Generation	0.0	550.0	348.6	0.0	0.0	978.5	0.0	0.0	0.0	714.8	0.0	0.0	0.0	0.0	0.0	70.0	0.0	0.0	0.0	0.0	2,661.9
	Upgrade	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Suspended	New Generation	0.0	1,080.0	375.1	500.0	0.0	700.0	0.0	0.0	0.0	76.6	0.0	0.0	0.0	0.0	0.0	100.0	0.0	0.0	0.0	0.0	2,831.7
	Upgrade	0.0	100.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	100.0
Withdrawn	New Generation	3,626.4	16,570.6	3,052.1	645.6	0.0	22,521.7	2,028.0	0.0	0.0	2,491.5	2,565.0	150.3	0.0	0.0	0.0	5,139.0	0.0	3,066.3	20.0	0.0	61,876.4
	Upgrade	0.0	0.0	100.0	0.0	0.0	5.7	0.0	0.0	0.0	82.0	0.0	0.0	0.0	0.0	0.0	192.6	0.0	6.0	0.0	0.0	386.3
Active	New Generation	20.0	6,589.5	350.0	966.1	0.0	4,325.5	100.0	0.0	0.0	96.6	499.6	0.0	2,640.0	0.0	0.0	138.0	0.0	531.1	0.0	0.0	16,256.2
	Upgrade	5.0	400.0	105.7	0.0	0.0	895.7	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	171.1	0.0	0.0	0.0	0.0	1,577.5
Total Projects	New Generation	3,653.9	27,228.8	5,129.8	2,111.7	0.0	30,939.1	2,128.0	0.0	0.0	3,379.5	3,064.6	150.3	2,640.0	0.0	0.0	6,442.0	0.0	3,796.6	20.0	0.0	90,684.1
	Upgrade	5.0	500.0	205.7	0.0	0.0	901.4	0.0	0.0	0.0	82.0	0.0	0.0	0.0	0.0	0.0	370.1	0.0	33.3	0.0	0.0	2,097.4

Solar Project Analysis

Table 12-32 shows the status of all solar generation projects that have entered the PJM generation queue from January 1, 1997 through June 30, 2018, by zone. Of a total of 1,502 solar projects ever to enter the PJM generation queue, 533 projects (35.5 percent) have been located in JCPL, AECO and PSEG, all zones in New Jersey. Of these three zones, AECO has the lowest completion rates for new generation and upgrade solar projects (with 4.0 percent of solar projects classified as new generation or upgrades in AECO either in service or under construction). Of these three zones, PSEG has the highest completion rates (with 36.6 percent of solar projects classified as either new generation or upgrades in PSEG either in service or under construction).

The number of new generation solar projects currently active, suspended or under construction is also highly concentrated in several zones. Of the 413 new generation solar projects that are active, suspended or under construction, 141 projects (34.1 percent) are located in Dominion. Of the 413 new generation solar projects that are active, suspended or under construction, 78 projects (18.9 percent) are located in AEP.

Table 12-32 Status of all solar generation queue projects: January 1997 through June 2018

Project Status	Project Classification	Number of Projects																				
		AECO	AEP	APS	ATSI	BGE	ComEd	DAY	DEOK	DLCO	Dominion	DPL	EKPC	JCPL	Met-Ed	PECO	PENELEC	Pepco	PPL	PSEG	RECO	Total
In Service	New Generation	7	4	4	0	1	1	1	0	0	16	9	0	40	0	1	0	0	2	39	0	125
	Upgrade	0	0	0	0	0	0	0	0	0	2	8	0	6	0	0	0	0	0	0	0	16
Under Construction	New Generation	0	1	1	0	2	0	1	0	0	1	4	0	6	0	0	0	0	0	6	0	22
	Upgrade	0	0	0	0	0	0	0	0	0	0	1	0	0	0	0	0	0	0	0	0	1
Suspended	New Generation	0	5	19	0	0	0	1	0	0	1	0	0	6	0	0	1	0	0	1	0	34
	Upgrade	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
Withdrawn	New Generation	158	65	56	8	10	22	12	11	0	129	110	3	167	12	6	12	10	27	67	0	885
	Upgrade	1	3	0	0	0	0	0	0	0	8	1	0	8	0	0	0	0	0	1	0	22
Active	New Generation	8	72	11	6	0	24	10	4	1	139	43	5	1	5	1	3	12	2	9	1	357
	Upgrade	1	4	2	1	0	1	1	2	1	22	1	0	1	2	0	0	0	1	0	0	40
Total Projects	New Generation	173	147	91	14	13	47	25	15	1	286	166	8	220	17	8	16	22	31	122	1	1,423
	Upgrade	2	7	2	1	0	1	1	2	1	32	11	0	15	2	0	0	0	1	1	0	79

Table 12-33 shows the status of all solar generation project MW that have entered the PJM generation queue from January 1, 1997 through June 30, 2018, by zone. Of a total of 45,999.0 MW of solar nameplate capacity ever to enter the PJM generation queue, 4,329.3 MW (9.4 percent) have been located in JCPL, AECO and PSEG, all of which are zones in New Jersey. Solar projects in Dominion have accounted for 18,274.8 MW (39.7 percent) of all solar project nameplate capacity in the PJM queue from January 1, 1997 through June 30, 2018. Solar projects in DPL have accounted for 3,017.1 MW or 6.6 percent of all solar project nameplate capacity in the PJM queue from January 1, 1997 through June 30, 2018.

Table 12-33 Current status of all solar generation capacity (MW) in the PJM generation queue: January 1997 through June 2018

Project Status	Project Classification	Project MW																				Total
		AECO	AEP	APS	ATSI	BGE	ComEd	DAY	DEOK	DLCO	Dominion	DPL	EKPC	JCPL	Met-Ed	PECO	PENELEC	Pepco	PPL	PSEG	RECO	
In Service	New Generation	57.3	14.7	53.0	0.0	1.1	9.0	2.5	0.0	0.0	529.2	118.4	0.0	275.3	0.0	3.3	0.0	0.0	15.0	193.5	0.0	1,272.3
	Upgrade	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	3.1	0.0	0.0	16.3	0.0	0.0	0.0	0.0	0.0	0.0	0.0	19.4
Under Construction	New Generation	0.0	20.0	10.0	0.0	22.0	0.0	3.4	0.0	0.0	80.0	37.0	0.0	91.9	0.0	0.0	0.0	0.0	0.0	30.1	0.0	294.4
	Upgrade	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Suspended	New Generation	0.0	59.9	313.3	0.0	0.0	0.0	20.0	0.0	0.0	5.0	0.0	0.0	50.7	0.0	0.0	3.0	0.0	0.0	6.0	0.0	457.9
	Upgrade	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Withdrawn	New Generation	1,664.3	3,111.7	1,261.4	216.1	31.3	1,158.8	500.5	259.4	0.0	6,982.0	1,489.0	189.9	1,348.8	467.0	51.4	121.7	174.6	283.7	451.9	0.0	19,763.5
	Upgrade	10.0	276.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	341.0	0.0	0.0	23.8	0.0	0.0	0.0	0.0	0.0	1.3	0.0	652.1
Active	New Generation	42.3	5,870.7	657.5	901.0	0.0	1,859.5	839.5	315.0	11.7	9,266.8	1,352.7	330.0	7.5	190.0	18.0	143.8	82.2	30.0	48.2	40.0	22,006.3
	Upgrade	1.6	187.0	75.0	20.0	0.0	0.0	20.0	85.0	8.3	1,067.7	20.0	0.0	8.5	40.0	0.0	0.0	0.0	0.0	0.0	0.0	1,533.1
Total Projects	New Generation	1,763.9	9,077.1	2,295.2	1,117.1	54.4	3,027.3	1,365.9	574.4	11.7	16,863.0	2,997.1	519.9	1,774.2	657.0	72.7	268.5	256.7	328.7	729.8	40.0	43,794.4
	Upgrade	11.6	463.0	75.0	20.0	0.0	0.0	20.0	85.0	8.3	1,411.8	20.0	0.0	48.6	40.0	0.0	0.0	0.0	0.0	1.3	0.0	2,204.6

Relationship Between Project Developer and Transmission Owner

Table 12-34 shows the relationship between the project developer and Transmission Owner for all project MW that have entered the PJM generation queue from January 1, 1997, through June 30, 2018, by transmission owner and unit type. A project where the developer is affiliated with the Transmission Owner is classified as related. A project where the developer is not affiliated with the Transmission Owner is classified as unrelated. For example, 36.0 MW of combined cycle generation projects that have entered the PJM generation queue in DEOK were projects developed by Duke Energy or subsidiaries of Duke Energy, the Transmission Owner for DEOK. These project MW are classified as related. There have been 667.5 MW of combined cycle projects that have entered the PJM generation queue in DEOK by developers not affiliated with Duke Energy. These project MW are classified as “unrelated.”

Table 12-34 Relationship between project developer and Transmission Owner for all interconnection queue projects MW by unit type: June 30, 2018

Parent Company	Transmission Owner	Related to Developer	Number of Projects	MW by Unit Type																	Total
				Battery	CC	CT - Natural Gas	CT - Oil	CT - Other	Fuel Cell	Hydro - Pumped Storage	Hydro - Run of River	Nuclear	RICE - Natural Gas	RICE - Oil	RICE - Other	Solar	Steam - Coal	Steam - Natural Gas	Steam - Other	Wind	
AEP	AEP	Related	47	16.0	700.0	0.0	0.0	0.0	0.0	34.0	0.0	214.0	0.0	0.0	0.0	142.7	3,918.0	70.0	0.0	0.0	5,094.7
		Unrelated	449	356.0	22,651.5	582.0	0.0	143.0	0.0	0.0	0.0	448.4	0.0	12.0	7.5	9.8	9,397.4	10,350.0	0.0	541.1	27,728.8
AES	DAY	Related	13	20.0	38.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	21.5	1,347.5	0.0	0.0	0.0	1,427.0
		Unrelated	47	39.9	1,172.0	0.0	0.0	10.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1,364.4	0.0	0.0	1.9	2,128.0
DLCO	DLCO	Related	0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
		Unrelated	22	20.0	870.0	0.0	40.0	19.2	0.0	0.0	106.0	1,879.0	0.0	0.0	0.0	20.0	2,810.0	0.0	0.0	0.0	0.0
Dominion	Dominion	Related	93	0.0	13,120.0	128.2	100.0	0.0	0.0	0.0	345.5	1,944.0	0.0	0.0	0.0	901.6	301.0	0.0	64.0	146.0	17,050.3
		Unrelated	413	147.0	9,784.7	520.0	0.5	338.7	0.0	0.0	29.5	0.0	0.0	10.0	1.6	17,373.2	20.0	0.0	343.7	3,315.5	31,884.4
Duke	DEOK	Related	7	23.8	36.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	6.4	0.0	0.0	0.0	0.0	0.0	66.2
		Unrelated	25	16.0	667.5	0.0	0.0	0.0	0.0	0.0	112.0	0.0	0.0	0.0	4.8	653.0	120.0	0.0	0.0	0.0	1,573.3
EKPC	EKPC	Related	2	0.0	821.8	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	821.8
		Unrelated	11	0.0	170.0	75.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	519.9	0.0	0.0	0.0	150.3	915.2
Exelon	AECO	Related	5	0.0	730.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	8.3	0.0	0.0	0.0	0.0	738.3
		Unrelated	272	41.0	9,325.3	403.0	380.0	31.0	2.8	0.0	0.0	0.0	0.0	5.0	0.0	1,767.2	15.0	0.0	10.0	3,658.9	15,639.2
	BGE	Related	14	20.0	487.0	0.0	0.0	8.5	0.0	0.0	0.0	108.5	0.0	0.0	0.0	20.0	10.0	0.0	0.0	0.0	654.0
		Unrelated	56	40.6	3,027.6	144.6	14.0	133.0	0.0	0.0	0.4	3,280.0	1.3	4.0	0.0	34.4	0.0	0.0	25.0	0.0	6,704.9
	ComEd	Related	16	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1,185.0	0.0	0.0	0.0	9.0	0.0	0.0	0.0	0.0	1,194.0
		Unrelated	317	406.7	14,565.8	1,113.0	0.0	120.2	0.0	13.6	22.7	0.0	0.0	42.0	12.7	3,018.3	1,926.0	91.0	90.0	31,840.5	53,262.5
	DPL	Related	7	0.0	1,716.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	7.4	0.0	0.0	0.0	0.0	0.0	1,723.4
		Unrelated	275	122.0	7,087.6	0.0	600.9	55.6	0.0	0.0	0.0	0.0	0.0	0.0	70.6	3,009.7	653.0	0.0	66.0	3,064.6	14,730.0
	PECO	Related	33	40.0	6,970.0	0.0	89.5	0.0	0.0	0.0	265.0	437.8	0.0	0.0	0.0	7.0	0.0	0.0	0.0	0.0	7,809.3
		Unrelated	78	5.3	20,923.0	0.0	0.0	18.7	0.0	0.0	0.0	0.0	0.0	19.0	0.0	72.7	0.0	0.0	0.0	0.0	21,038.7
	Pepco	Related	0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
		Unrelated	85	20.0	23,394.9	0.0	30.0	12.5	0.0	0.0	0.0	1,640.0	0.0	0.0	0.0	256.7	0.0	0.0	0.0	0.0	25,354.1
First Energy	APS	Related	4	0.0	1,453.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1,710.0	0.0	0.0	0.0	3,163.0
		Unrelated	340	330.9	24,962.4	120.0	0.0	104.7	0.0	0.0	623.3	0.0	120.1	53.8	5.1	2,370.2	4,092.0	0.0	184.4	5,335.5	38,302.4
	ATSI	Related	6	0.0	1,678.0	0.0	0.0	0.0	0.0	0.0	0.0	16.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1,694.0
		Unrelated	70	56.1	10,739.0	95.0	5.0	166.4	0.0	0.0	0.0	0.0	59.7	0.0	6.9	1,137.1	0.0	16.5	0.0	2,111.7	14,393.4
	JCPL	Related	3	0.0	0.0	0.0	0.0	0.0	0.0	0.0	20.0	0.0	0.0	0.0	20.5	0.0	0.0	0.0	0.0	0.0	40.5
		Unrelated	335	314.4	15,904.9	0.0	0.0	21.2	0.8	0.0	1.6	0.0	0.6	0.0	0.0	1,802.3	0.0	0.0	30.0	2,640.0	20,715.8
	Met-Ed	Related	0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
		Unrelated	86	23.0	17,458.9	34.1	1,196.0	60.9	0.0	0.0	0.0	79.0	0.0	8.0	0.0	697.0	0.0	0.0	30.4	0.0	19,587.3
	PENELEC	Related	4	0.0	539.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1,860.0	0.0	0.0	0.0	0.0	2,399.0
		Unrelated	244	97.4	19,243.5	975.9	0.9	766.9	0.0	0.0	62.3	14.0	262.2	8.0	0.0	268.5	561.0	590.0	60.0	6,812.0	29,722.5
PPL	PPL	Related	21	0.0	2,294.0	0.0	0.0	0.0	0.0	0.0	109.0	1,600.0	0.0	0.0	0.0	0.0	111.0	0.0	0.0	0.0	4,114.0
		Unrelated	223	520.0	23,579.7	19.9	0.0	281.8	0.0	0.0	142.6	388.0	19.9	10.4	0.0	328.7	6,896.6	0.0	28.5	3,829.9	36,045.9
PSEG	PSEG	Related	105	0.0	12,792.1	906.1	0.0	0.0	0.0	0.0	0.0	381.0	0.0	0.0	0.0	174.7	24.0	0.0	0.0	0.0	14,277.9
		Unrelated	191	14.5	19,582.8	236.0	600.0	81.7	4.9	0.0	1,000.0	0.0	10.6	8.0	0.0	556.4	0.0	0.0	0.0	20.0	22,114.9
Con Ed	RECO	Related	0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
		Unrelated	3	0.0	6.9	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	40.0	0.0	0.0	0.0	0.0	46.9
Total		Related	380	119.8	43,374.9	1,034.3	189.5	8.5	0.0	34.0	739.5	5,886.3	0.0	0.0	0.0	1,312.0	9,288.5	70.0	64.0	146.0	62,267.3
		Unrelated	3542	2,570.8	245,117.8	4,318.5	2,867.3	2,365.5	8.5	13.6	2,548.8	7,280.0	486.4	175.7	111.5	44,687.0	27,443.6	697.5	1,411.0	92,635.6	434,739.0

Combined Cycle Project Developer and Transmission Owner Relationships

Table 12-35 shows the relationship between the project developer and Transmission Owner for all combined cycle project MW that have entered the PJM generation queue from January 1, 1997 through June 30, 2018, by transmission owner and project status. Of the 48,373.8 combined cycle project MW that have achieved in service or under construction status during this time period, 11,627.0 MW (24.0 percent) have been developed by Transmission Owners building in their own service territory.

Table 12-35 Relationship between project developer and transmission owner for all combined cycle project MW in PJM interconnection queue: June 30, 2018

Parent Company	Transmission Owner	Related to Developer	MW by Project Status					Total
			Active	In Service	Under Construction	Suspended	Withdrawn	
AEP	AEP	Related	100.0	600.0	0.0	0.0	0.0	700.0
		Unrelated	6,337.0	2,775.0	0.0	1,579.0	11,960.5	22,651.5
AES	DAY	Related	0.0	38.0	0.0	0.0	0.0	38.0
		Unrelated	1,150.0	22.0	0.0	0.0	0.0	1,172.0
DLCO	DLCO	Related	0.0	0.0	0.0	0.0	0.0	0.0
		Unrelated	0.0	0.0	205.0	0.0	665.0	870.0
Dominion	Dominion	Related	45.0	3,918.0	1,681.0	0.0	7,476.0	13,120.0
		Unrelated	3,904.6	2,629.8	0.0	0.0	3,250.3	9,784.7
Duke	DEOK	Related	0.0	0.0	0.0	0.0	36.0	36.0
		Unrelated	0.0	533.0	0.0	0.0	134.5	667.5
EKPC	EKPC	Related	0.0	0.0	0.0	0.0	821.8	821.8
		Unrelated	0.0	0.0	0.0	0.0	170.0	170.0
Exelon	AECO	Related	0.0	0.0	0.0	0.0	730.0	730.0
		Unrelated	1,061.6	1,281.9	452.0	235.0	6,294.8	9,325.3
	BGE	Related	0.0	367.0	0.0	0.0	120.0	487.0
		Unrelated	0.0	25.5	0.0	0.0	3,002.1	3,027.6
ComEd	Related	0.0	0.0	0.0	0.0	0.0	0.0	
	Unrelated	8,354.2	1,493.0	12.6	0.0	4,706.0	14,565.8	
DPL	DPL	Related	0.0	411.0	0.0	0.0	1,305.0	1,716.0
		Unrelated	600.0	1,837.2	0.0	451.0	4,199.4	7,087.6
PECO	PECO	Related	0.0	5.0	0.0	0.0	6,965.0	6,970.0
		Unrelated	67.0	3,313.5	927.5	0.0	16,615.0	20,923.0
Pepco	Pepco	Related	0.0	0.0	0.0	0.0	0.0	0.0
		Unrelated	75.0	963.1	819.5	1,038.1	20,499.2	23,394.9
First Energy	APS	Related	0.0	525.0	0.0	0.0	928.0	1,453.0
		Unrelated	3,550.7	2,033.7	930.0	1,814.9	16,633.1	24,962.4
	ATSI	Related	0.0	0.0	0.0	0.0	1,678.0	1,678.0
		Unrelated	4,018.0	839.0	961.0	1,152.0	3,769.0	10,739.0
JCPL	Related	0.0	0.0	0.0	0.0	0.0	0.0	
	Unrelated	1,697.2	2,294.3	0.0	200.0	11,713.4	15,904.9	
Met-Ed	Related	0.0	0.0	0.0	0.0	0.0	0.0	
	Unrelated	113.9	2,117.0	485.0	0.0	14,743.0	17,458.9	
PENELEC	Related	0.0	5.0	0.0	0.0	534.0	539.0	
	Unrelated	104.9	1,369.2	1,100.0	231.8	16,437.6	19,243.5	
PPL	PPL	Related	0.0	633.0	0.0	0.0	1,661.0	2,294.0
		Unrelated	1,835.8	3,699.2	2,420.0	0.0	15,624.7	23,579.7
PSEG	PSEG	Related	51.1	2,876.0	568.0	0.0	9,297.0	12,792.1
		Unrelated	3,091.4	1,047.8	160.0	0.0	15,283.6	19,582.8
Con Ed	RECO	Related	0.0	0.0	0.0	0.0	0.0	0.0
		Unrelated	0.0	0.0	0.0	0.0	6.9	6.9
Total	Total	Related	196.1	9,378.0	2,249.0	0.0	31,551.8	43,374.9
		Unrelated	35,961.3	28,274.2	8,472.6	6,701.8	165,707.9	245,117.8

Combustion Turbine – Natural Gas Project Developer and Transmission Owner Relationships

Table 12-36 shows the relationship between the project developer and Transmission Owner for all CT – natural gas project MW that have entered the PJM generation queue from January 1, 1997 through June 30, 2018, by transmission owner and project status. Of the 493.1 CT – natural gas project MW that have achieved in service or under construction status during this time period, none have been developed by Transmission Owners building in their own service territory.

Table 12-36 Relationship between project developer and transmission owner for all CT – natural gas project MW in PJM interconnection queue: June 30, 2018

Parent Company	Transmission Owner	Related to Developer	MW by Project Status					Total
			Active	In Service	Under Construction	Suspended	Withdrawn	
AEP	AEP	Related	0.0	0.0	0.0	0.0	0.0	0.0
		Unrelated	413.0	97.0	0.0	0.0	72.0	582.0
AES	DAY	Related	0.0	0.0	0.0	0.0	0.0	0.0
		Unrelated	0.0	0.0	0.0	0.0	0.0	0.0
DLCO	DLCO	Related	0.0	0.0	0.0	0.0	0.0	0.0
		Unrelated	0.0	0.0	0.0	0.0	0.0	0.0
Dominion	Dominion	Related	128.2	0.0	0.0	0.0	0.0	128.2
		Unrelated	126.0	340.0	0.0	0.0	54.0	520.0
Duke	DEOK	Related	0.0	0.0	0.0	0.0	0.0	0.0
		Unrelated	0.0	0.0	0.0	0.0	0.0	0.0
EKPC	EKPC	Related	0.0	0.0	0.0	0.0	0.0	0.0
		Unrelated	75.0	0.0	0.0	0.0	0.0	75.0
Exelon	AECO	Related	0.0	0.0	0.0	0.0	0.0	0.0
		Unrelated	388.0	0.0	0.0	0.0	15.0	403.0
	BGE	Related	0.0	0.0	0.0	0.0	0.0	0.0
		Unrelated	144.6	0.0	0.0	0.0	0.0	144.6
	ComEd	Related	0.0	0.0	0.0	0.0	0.0	0.0
		Unrelated	1,083.0	20.0	0.0	0.0	10.0	1,113.0
	DPL	Related	0.0	0.0	0.0	0.0	0.0	0.0
		Unrelated	0.0	0.0	0.0	0.0	0.0	0.0
	PECO	Related	0.0	0.0	0.0	0.0	0.0	0.0
		Unrelated	0.0	0.0	0.0	0.0	0.0	0.0
	Pepco	Related	0.0	0.0	0.0	0.0	0.0	0.0
		Unrelated	0.0	0.0	0.0	0.0	0.0	0.0
First Energy	APS	Related	0.0	0.0	0.0	0.0	0.0	0.0
		Unrelated	120.0	0.0	0.0	0.0	0.0	120.0
	ATSI	Related	0.0	0.0	0.0	0.0	0.0	0.0
		Unrelated	70.0	0.0	0.0	0.0	25.0	95.0
	JCPL	Related	0.0	0.0	0.0	0.0	0.0	0.0
		Unrelated	0.0	0.0	0.0	0.0	0.0	0.0
	Met-Ed	Related	0.0	0.0	0.0	0.0	0.0	0.0
		Unrelated	0.0	34.1	0.0	0.0	0.0	34.1
	PENELEC	Related	0.0	0.0	0.0	0.0	0.0	0.0
		Unrelated	463.0	0.0	0.0	19.9	493.0	975.9
PPL	PPL	Related	0.0	0.0	0.0	0.0	0.0	0.0
		Unrelated	19.9	0.0	0.0	0.0	0.0	19.9
PSEG	PSEG	Related	0.0	0.0	0.0	0.0	906.1	906.1
		Unrelated	0.0	2.0	0.0	0.0	234.0	236.0
Con Ed	RECO	Related	0.0	0.0	0.0	0.0	0.0	0.0
		Unrelated	0.0	0.0	0.0	0.0	0.0	0.0
Total		Related	128.2	0.0	0.0	0.0	906.1	1,034.3
		Unrelated	2,902.5	493.1	0.0	19.9	903.0	4,318.5

Wind Project Developer and Transmission Owner Relationships

Table 12-37 shows the relationship between the project developer and Transmission Owner for all wind project MW that have entered the PJM generation queue from January 1, 1997 through June 30, 2018, by transmission owner and project status. Of the 9,753.5 wind project MW that have achieved in service or under construction status during this time period, 12.0 MW (0.1 percent) have been developed by Transmission Owners building in their own service territory.

Table 12-37 Relationship between project developer and transmission owner for all wind project MW in PJM interconnection queue: June 30, 2018

Parent Company	Transmission Owner	Related to Developer	MW by Project Status					Total
			Active	In Service	Under Construction	Suspended	Withdrawn	
AEP	AEP	Related	0.0	0.0	0.0	0.0	0.0	0.0
		Unrelated	6,989.5	2,438.7	550.0	1,180.0	16,570.6	27,728.8
AES	DAY	Related	0.0	0.0	0.0	0.0	0.0	0.0
		Unrelated	100.0	0.0	0.0	0.0	2,028.0	2,128.0
DLCO	DLCO	Related	0.0	0.0	0.0	0.0	0.0	0.0
		Unrelated	0.0	0.0	0.0	0.0	0.0	0.0
Dominion	Dominion	Related	0.0	0.0	12.0	0.0	134.0	146.0
		Unrelated	96.6	0.0	702.8	76.6	2,439.5	3,315.5
Duke	DEOK	Related	0.0	0.0	0.0	0.0	0.0	0.0
		Unrelated	0.0	0.0	0.0	0.0	0.0	0.0
EKPC	EKPC	Related	0.0	0.0	0.0	0.0	0.0	0.0
		Unrelated	0.0	0.0	0.0	0.0	150.3	150.3
Exelon	AECO	Related	0.0	0.0	0.0	0.0	0.0	0.0
		Unrelated	25.0	7.5	0.0	0.0	3,626.4	3,658.9
	BGE	Related	0.0	0.0	0.0	0.0	0.0	0.0
		Unrelated	0.0	0.0	0.0	0.0	0.0	0.0
	ComEd	Related	0.0	0.0	0.0	0.0	0.0	0.0
		Unrelated	5,221.2	2,413.5	978.5	700.0	22,527.3	31,840.5
	DPL	Related	0.0	0.0	0.0	0.0	0.0	0.0
		Unrelated	499.6	0.0	0.0	0.0	2,565.0	3,064.6
	PECO	Related	0.0	0.0	0.0	0.0	0.0	0.0
		Unrelated	0.0	0.0	0.0	0.0	0.0	0.0
	Pepco	Related	0.0	0.0	0.0	0.0	0.0	0.0
		Unrelated	0.0	0.0	0.0	0.0	0.0	0.0
First Energy	APS	Related	0.0	0.0	0.0	0.0	0.0	0.0
		Unrelated	455.7	1,004.0	348.6	375.1	3,152.1	5,335.5
	ATSI	Related	0.0	0.0	0.0	0.0	0.0	0.0
		Unrelated	966.1	0.0	0.0	500.0	645.6	2,111.7
	JCPL	Related	0.0	0.0	0.0	0.0	0.0	0.0
		Unrelated	2,640.0	0.0	0.0	0.0	0.0	2,640.0
	Met-Ed	Related	0.0	0.0	0.0	0.0	0.0	0.0
		Unrelated	0.0	0.0	0.0	0.0	0.0	0.0
	PENELEC	Related	0.0	0.0	0.0	0.0	0.0	0.0
		Unrelated	309.1	1,001.4	70.0	100.0	5,331.6	6,812.0
PPL	PPL	Related	0.0	0.0	0.0	0.0	0.0	0.0
		Unrelated	531.1	226.5	0.0	0.0	3,072.3	3,829.9
PSEG	PSEG	Related	0.0	0.0	0.0	0.0	0.0	0.0
		Unrelated	0.0	0.0	0.0	0.0	20.0	20.0
Con Ed	RECO	Related	0.0	0.0	0.0	0.0	0.0	0.0
		Unrelated	0.0	0.0	0.0	0.0	0.0	0.0
Total		Related	0.0	0.0	12.0	0.0	134.0	146.0
		Unrelated	17,833.7	7,091.6	2,649.9	2,931.7	62,128.7	92,635.6

Solar Project Developer and Transmission Owner Relationships

Table 12-38 shows the relationship between the project developer and Transmission Owner for all solar project MW that have entered the PJM generation queue from January 1, 1997 through June 30, 2018, by transmission owner and project status. Of the 1,586.1 solar project MW that have achieved in service or under construction status during this time period, 443.6 MW (28.0 percent) have been developed by Transmission Owners building in their own service territory.

Table 12-38 Relationship between project developer and transmission owner for all solar project MW in PJM interconnection queue: June 30, 2018

Parent Company	Transmission Owner	Related to Developer	MW by Project Status					Total
			Active	In Service	Under Construction	Suspended	Withdrawn	
AEP	AEP	Related	68.0	14.7	0.0	10.0	50.0	142.7
		Unrelated	5,989.7	0.0	20.0	49.9	3,337.7	9,397.4
AES	DAY	Related	0.0	0.0	0.0	0.0	21.5	21.5
		Unrelated	859.5	2.5	3.4	20.0	479.0	1,364.4
DLCO	DLCO	Related	0.0	0.0	0.0	0.0	0.0	0.0
		Unrelated	20.0	0.0	0.0	0.0	0.0	20.0
Dominion	Dominion	Related	392.3	277.4	0.0	0.0	231.9	901.6
		Unrelated	9,942.2	254.9	80.0	5.0	7,091.1	17,373.2
Duke	DEOK	Related	0.0	0.0	0.0	0.0	6.4	6.4
		Unrelated	400.0	0.0	0.0	0.0	253.0	653.0
EKPC	EKPC	Related	0.0	0.0	0.0	0.0	0.0	0.0
		Unrelated	330.0	0.0	0.0	0.0	189.9	519.9
Exelon	AECO	Related	0.0	0.0	0.0	0.0	8.3	8.3
		Unrelated	43.9	57.3	0.0	0.0	1,666.0	1,767.2
	BGE	Related	0.0	0.0	20.0	0.0	0.0	20.0
		Unrelated	0.0	1.1	2.0	0.0	31.3	34.4
	ComEd	Related	0.0	9.0	0.0	0.0	0.0	9.0
		Unrelated	1,859.5	0.0	0.0	0.0	1,158.8	3,018.3
	DPL	Related	0.0	7.4	0.0	0.0	0.0	7.4
		Unrelated	1,372.7	111.0	37.0	0.0	1,489.0	3,009.7
	PECO	Related	0.0	0.0	0.0	0.0	0.0	0.0
		Unrelated	18.0	3.3	0.0	0.0	51.4	72.7
	Pepco	Related	0.0	0.0	0.0	0.0	0.0	0.0
		Unrelated	82.2	0.0	0.0	0.0	174.6	256.7
First Energy	APS	Related	0.0	0.0	0.0	0.0	0.0	0.0
		Unrelated	732.5	53.0	10.0	313.3	1,261.4	2,370.2
	ATSI	Related	0.0	0.0	0.0	0.0	0.0	0.0
		Unrelated	921.0	0.0	0.0	0.0	216.1	1,137.1
	JCPL	Related	8.5	0.0	0.0	0.0	12.0	20.5
		Unrelated	7.5	291.6	91.9	50.7	1,360.6	1,802.3
	Met-Ed	Related	0.0	0.0	0.0	0.0	0.0	0.0
		Unrelated	230.0	0.0	0.0	0.0	467.0	697.0
	PENELEC	Related	0.0	0.0	0.0	0.0	0.0	0.0
		Unrelated	143.8	0.0	0.0	3.0	121.7	268.5
PPL	PPL	Related	0.0	0.0	0.0	0.0	0.0	0.0
		Unrelated	30.0	15.0	0.0	0.0	283.7	328.7
PSEG	PSEG	Related	23.2	111.1	4.0	0.0	36.4	174.7
		Unrelated	25.0	82.4	26.1	6.0	416.9	556.4
Con Ed	RECO	Related	0.0	0.0	0.0	0.0	0.0	0.0
		Unrelated	40.0	0.0	0.0	0.0	0.0	40.0
Total		Related	492.0	419.6	24.0	10.0	366.5	1,312.0
		Unrelated	23,047.4	872.1	270.4	447.9	20,049.2	44,687.0

Regional Transmission Expansion Plan (RTEP)

Authorized TEAC Transmission Upgrades

The Transmission Expansion Advisory Committee (TEAC) regularly reviews internal and external proposals to improve transmission reliability throughout PJM. These proposals are periodically presented to the PJM Board of Managers for authorization.

- On February 14, 2018, the PJM Board of Managers authorized an additional \$397.0 million in transmission upgrades and additions. The approved projects include local planning criteria projects in the PSEG and Dominion zones, end of life projects in the Dominion zone and additional equipment upgrades necessary to relieve congestion in the BGE, PPL and DEOK zones.

Backbone Facilities

PJM baseline transmission projects are implemented to resolve reliability criteria violations. PJM backbone transmission projects are a subset of significant baseline projects, which are intended to resolve multiple reliability criteria violations and congestion issues and which may have substantial impacts on energy and capacity markets. There are currently three backbone projects under development, Surry Skiffes Creek 500kV, and the conversion of the Marion-Bayonne and Bayway-Linden lines from 138 kV to 345 kV.²⁷

Market Efficiency Process²⁸

PJM's Regional Transmission Expansion Plan (RTEP) process includes a market efficiency analysis. The purpose of the market efficiency analysis is: to determine which reliability based enhancements have economic benefit if accelerated; to identify new transmission enhancements that result in economic benefits; and to identify economic benefits associated with modification to existing RTEP reliability based enhancements that when modified would

relieve one or more economic constraints. PJM identifies the economic benefit of proposed transmission projects by conducting production cost analyses.²⁹

PJM presents all of the RTEP market efficiency enhancements to the TEAC Committee for review and comment. Subsequent to TEAC review, PJM addresses the TEAC review and presents the final RTEP market efficiency plan to the PJM Board, along with the advice, comments, and recommendations of the TEAC Committee, for Board approval.

To be included in the RTEP recommended to the PJM Board of Managers for approval, the relative benefits and costs of the economic based enhancement or expansion must meet a benefit/cost ratio threshold of at least 1.25:1. The benefit/cost ratio is the ratio of the present value of the total annual benefit for 15 years to the present value of the total annual cost for the first 15 years of the life of the enhancement or expansion.

The market efficiency process is comprised of a 12 month cycle and a 24 month cycle, both of which begin and end on the calendar year. The 12 month cycle is used for analysis of modifications and accelerations to approved RTEP projects only. The 24 month cycle is used for analysis of new economic transmission projects for years five through 15. This long-term proposal window takes place concurrent with the long-term proposal window for reliability projects.³⁰

Through June 30, 2018, PJM has completed two market efficiency cycles. In the first cycle, PJM received 92 proposals for 11 identified issues. In the second market efficiency cycle, PJM received 96 proposals for four identified issues.

Supplemental Projects

Supplemental projects are “transmission expansions or enhancements that are not required for compliance with PJM criteria and are not state public policy projects according to the PJM Operating Agreement. These projects are used as

²⁷ See PJM, “2017 RTEP Process Scope and Input Assumptions White Paper,” P 25. <<http://www.pjm.com/-/media/library/reports-notices/2017-rtep/20170731-rtep-input-assumptions-and-scope-whitepaper.ashx?la=en>>.

²⁸ The material in this section is based in part on the PJM Manual 14B: PJM Region Transmission Planning Process. See PJM, “PJM Manual 14B: PJM Region Transmission Planning Process,” Rev. 41 (April 19, 2018) <<http://www.pjm.com/-/media/documents/manuals/m14b.ashx?la=en>>.

²⁹ See PJM, “PJM Regional Transmission Expansion Plan: 2016,” (February 28, 2017). <<http://www.pjm.com/-/media/library/reports-notices/2016-rtep/2016-rtep-books-1-3.ashx?la=en>>.

³⁰ See PJM, “PJM Market Efficiency Modeling Practices,” (February 2, 2017). <<http://www.pjm.com/-/media/planning/rtep-dev/market-efficiency/pjm-market-efficiency-modeling-practices.ashx?la=en>>.

inputs to RTEP models, but are not required for reliability, economic efficiency or operational performance criteria, as determined by PJM.”³¹ Supplemental projects are funded wholly by the Transmission Owner and no PJM approval is needed. Supplemental projects addressed two of the four issues identified in the most recent market efficiency cycle. Because supplemental projects are considered by transmission owners to be outside the scope of FERC Order No. 1000, supplemental projects may be excluded from the Order No. 1000 competitive process.

Figure 12-3 shows the latest cost estimate of all supplemental projects by expected in service year. FERC Order 890 was issued on February 16, 2007, and implemented in PJM starting in 2008. Order 890 required Transmission Providers to participate in a coordinated, open and transparent planning process. Prior to the implementation of Order 890, there were transmission projects planned by transmission owners and included in the PJM planning models, that were not included in the totals shown in Figure 12-3, Table 12-39 and Table 12-40. There has been a significant increase in supplemental projects coincident with the coordinated, open and transparent planning process introduced by the implementation of Order 890 starting in 2008 and the competitive planning process introduced by the implementation of FERC Order No. 1000 starting in 2011.

Figure 12-3 Latest cost estimate of supplemental projects by expected in service year: 1998 through 2018

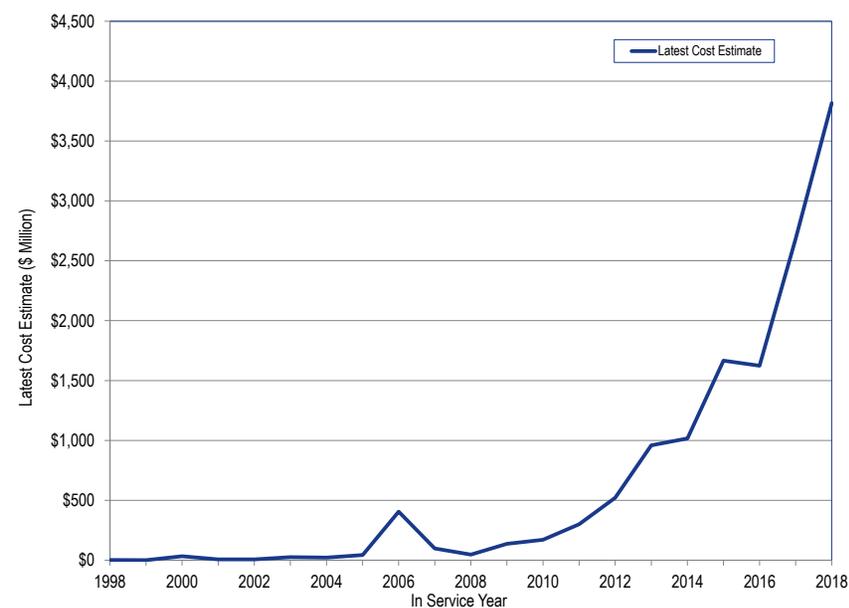


Table 12-1 shows the number of supplemental projects by expected in service year for each transmission zone. The average number of supplemental projects in each expected in service year increased by 500.0 percent, from 20 for years 1998 through 2007 (pre Order 890) to 120 for years 2008 through 2018 (post Order 890).

³¹ See PJM, "Transmission Construction Status" (January 23, 2018) <<http://www.pjm.com/planning/rtep-upgrades-status/construct-status.aspx>>.

Table 12-39 Number of supplemental projects by expected in service year and zone: 1998 through 2030

Year	AECO	AEP	APS	ATSI	BGE	ComEd	DAY	DEOK	DLCO	Dominion	DPL	EKPC	JCPL	Met-Ed	PECO	PENELEC	Pepeco	PPL	PSEG	Total
1998	0	0	0	0	0	0	0	0	0	0	3	0	0	0	0	0	0	0	0	3
1999	0	0	0	0	0	0	0	0	0	0	2	0	0	0	0	0	0	0	0	2
2000	0	0	0	0	0	0	0	0	0	0	11	0	0	0	0	0	0	0	0	11
2001	0	0	0	0	0	0	0	0	0	0	14	0	0	0	0	0	0	0	0	14
2002	0	0	0	0	0	0	0	0	0	0	10	0	0	0	0	0	0	0	0	10
2003	3	0	0	0	0	0	0	0	0	0	10	0	0	0	0	2	0	0	0	15
2004	5	0	10	0	0	9	0	0	0	0	12	0	2	0	0	0	0	0	2	40
2005	4	2	8	0	0	4	0	0	0	1	14	0	1	0	1	2	0	0	2	39
2006	4	2	5	0	0	6	0	0	0	0	9	0	1	0	0	1	0	2	1	31
2007	1	1	5	0	4	5	0	0	4	0	6	0	0	0	0	2	0	1	6	35
2008	3	0	15	0	1	6	0	0	1	7	3	0	0	1	0	0	0	3	1	41
2009	3	1	5	0	1	8	0	0	3	3	5	0	0	0	5	1	0	0	2	37
2010	0	6	7	0	3	4	0	0	6	3	0	0	1	2	2	0	0	2	5	41
2011	0	8	8	0	0	2	0	0	5	2	0	0	1	0	4	0	0	3	4	37
2012	0	5	6	4	1	2	0	7	3	16	1	0	2	0	1	0	0	4	11	63
2013	5	21	4	5	0	11	0	6	5	13	1	0	1	1	1	0	1	13	19	107
2014	2	31	2	8	2	14	0	5	6	18	3	2	2	0	1	2	0	9	16	123
2015	4	15	2	9	1	37	0	8	4	17	5	4	2	0	1	0	4	7	25	145
2016	5	10	4	17	0	26	0	6	2	13	4	2	0	1	3	2	3	11	30	139
2017	6	124	7	26	1	23	0	3	8	36	7	5	0	3	0	3	2	23	38	315
2018	14	98	5	8	2	12	0	12	6	24	11	6	0	0	2	1	0	29	42	272
2019	7	43	0	1	2	5	0	4	1	10	2	7	0	0	1	0	1	40	23	147
2020	8	21	1	0	0	1	0	1	0	12	2	3	0	0	0	1	0	20	26	96
2021	3	27	0	0	0	1	10	0	2	7	0	2	1	0	0	0	0	23	7	83
2022	2	0	0	0	1	0	0	0	0	0	5	0	1	0	0	0	2	18	0	29
2023	1	0	0	0	0	0	0	0	0	0	1	0	1	0	0	0	0	8	0	11
2024	2	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	6	0	8
2025	1	0	0	0	1	0	0	0	0	0	0	0	0	0	0	0	0	3	0	5
2026	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	11	0	11
2027	0	0	0	0	0	0	0	0	0	1	0	0	0	0	0	0	0	0	0	1
2028	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
2029	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
2030	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1	0	1
Total	83	415	94	78	20	176	10	52	56	183	141	31	16	8	22	17	13	237	260	1,912

Table 12-40 shows the latest cost estimate of supplemental projects by expected in service year for each transmission zone. The average latest cost of supplemental projects in each expected in service year increased by 1,724.7 percent, from \$64.5 million for years 1998 through 2007 (pre Order 890) to \$1,176.9 million for years 2008 through 2018 (post Order 890).

Table 12-40 Latest cost estimate by expected in service year and zone (\$ millions): 1998 through 2030

Year	AECO	AEP	APS	ATSI	BGE	ComEd	DAY	DEOK	DLCO	Dominion	DPL	EKPC	JCPL	Met-Ed	PECO	PENELEC	Pepco	PPL	PSEG	Total
1998	\$0.00	\$0.00	\$0.00	\$0.00	\$0.00	\$0.00	\$0.00	\$0.00	\$0.00	\$0.00	\$1.67	\$0.00	\$0.00	\$0.00	\$0.00	\$0.00	\$0.00	\$0.00	\$0.00	\$1.67
1999	\$0.00	\$0.00	\$0.00	\$0.00	\$0.00	\$0.00	\$0.00	\$0.00	\$0.00	\$0.00	\$0.78	\$0.00	\$0.00	\$0.00	\$0.00	\$0.00	\$0.00	\$0.00	\$0.00	\$0.78
2000	\$0.00	\$0.00	\$0.00	\$0.00	\$0.00	\$0.00	\$0.00	\$0.00	\$0.00	\$0.00	\$32.95	\$0.00	\$0.00	\$0.00	\$0.00	\$0.00	\$0.00	\$0.00	\$0.00	\$32.95
2001	\$0.00	\$0.00	\$0.00	\$0.00	\$0.00	\$0.00	\$0.00	\$0.00	\$0.00	\$0.00	\$6.79	\$0.00	\$0.00	\$0.00	\$0.00	\$0.00	\$0.00	\$0.00	\$0.00	\$6.79
2002	\$0.00	\$0.00	\$0.00	\$0.00	\$0.00	\$0.00	\$0.00	\$0.00	\$0.00	\$0.00	\$7.00	\$0.00	\$0.00	\$0.00	\$0.00	\$0.00	\$0.00	\$0.00	\$0.00	\$7.00
2003	\$7.42	\$0.00	\$0.00	\$0.00	\$0.00	\$0.00	\$0.00	\$0.00	\$0.00	\$0.00	\$8.75	\$0.00	\$0.00	\$0.00	\$0.00	\$9.60	\$0.00	\$0.00	\$0.00	\$25.77
2004	\$4.44	\$0.00	\$9.99	\$0.00	\$0.00	\$0.82	\$0.00	\$0.00	\$0.00	\$0.00	\$7.32	\$0.00	\$0.00	\$0.00	\$0.00	\$0.00	\$0.00	\$0.00	\$0.00	\$22.58
2005	\$4.06	\$14.67	\$10.11	\$0.00	\$0.00	\$2.58	\$0.00	\$0.00	\$0.00	\$0.02	\$10.97	\$0.00	\$0.00	\$0.00	\$0.50	\$0.00	\$0.00	\$0.00	\$0.00	\$42.90
2006	\$4.03	\$309.70	\$0.94	\$0.00	\$0.00	\$48.93	\$0.00	\$0.00	\$0.00	\$0.00	\$11.63	\$0.00	\$6.00	\$0.00	\$0.00	\$1.50	\$0.00	\$4.63	\$18.80	\$406.15
2007	\$0.56	\$2.06	\$9.85	\$0.00	\$37.61	\$4.65	\$0.00	\$0.00	\$31.75	\$0.00	\$9.71	\$0.00	\$0.00	\$0.00	\$0.00	\$0.00	\$0.00	\$0.34	\$2.25	\$98.77
2008	\$2.36	\$0.00	\$12.03	\$0.00	\$0.45	\$7.61	\$0.00	\$0.00	\$7.00	\$14.01	\$2.28	\$0.00	\$0.00	\$0.00	\$0.00	\$0.00	\$0.00	\$1.60	\$0.00	\$47.33
2009	\$0.77	\$0.90	\$12.17	\$0.00	\$5.00	\$21.11	\$0.00	\$0.00	\$19.60	\$2.12	\$7.36	\$0.00	\$0.00	\$0.00	\$48.10	\$2.73	\$0.00	\$0.00	\$17.60	\$137.46
2010	\$0.00	\$34.36	\$12.13	\$0.00	\$18.90	\$1.38	\$0.00	\$0.00	\$34.45	\$14.98	\$0.00	\$0.00	\$0.03	\$4.58	\$31.80	\$0.00	\$0.00	\$1.08	\$17.72	\$171.41
2011	\$0.00	\$37.60	\$9.30	\$0.00	\$0.00	\$1.00	\$0.00	\$0.00	\$16.72	\$85.67	\$0.00	\$0.00	\$1.16	\$0.00	\$113.30	\$0.00	\$0.00	\$0.78	\$34.60	\$300.13
2012	\$0.00	\$46.00	\$5.12	\$0.35	\$2.20	\$12.60	\$0.00	\$26.06	\$11.60	\$165.74	\$0.99	\$0.00	\$6.61	\$0.00	\$12.60	\$0.00	\$0.00	\$8.91	\$223.01	\$521.79
2013	\$3.15	\$134.93	\$1.10	\$33.68	\$0.00	\$59.25	\$0.00	\$9.93	\$81.98	\$25.03	\$0.99	\$0.00	\$0.05	\$4.10	\$22.50	\$0.00	\$2.40	\$75.84	\$503.72	\$958.65
2014	\$8.03	\$387.00	\$5.97	\$58.70	\$21.20	\$60.37	\$0.00	\$2.43	\$14.90	\$88.61	\$5.96	\$0.38	\$5.60	\$0.00	\$13.30	\$1.30	\$0.00	\$33.47	\$309.70	\$1,016.92
2015	\$3.73	\$237.45	\$3.80	\$21.90	\$2.00	\$376.00	\$0.00	\$14.12	\$4.53	\$113.53	\$13.06	\$1.56	\$0.30	\$0.00	\$33.80	\$0.00	\$42.50	\$50.17	\$748.01	\$1,666.46
2016	\$73.54	\$31.68	\$18.40	\$182.70	\$0.00	\$308.15	\$0.00	\$15.13	\$26.95	\$40.68	\$26.60	\$0.25	\$0.00	\$2.37	\$86.40	\$0.40	\$7.80	\$58.76	\$744.18	\$1,623.99
2017	\$39.48	\$693.49	\$14.30	\$149.80	\$0.09	\$154.65	\$0.00	\$64.47	\$3.62	\$107.89	\$74.96	\$2.35	\$0.00	\$14.70	\$0.00	\$8.30	\$168.00	\$247.01	\$942.24	\$2,685.35
2018	\$99.94	\$601.79	\$10.10	\$14.50	\$4.19	\$136.20	\$0.00	\$36.20	\$26.38	\$176.67	\$101.25	\$14.90	\$0.00	\$0.00	\$47.60	\$0.80	\$0.00	\$400.20	\$2,146.14	\$3,816.86
2019	\$75.98	\$453.28	\$0.00	\$32.00	\$69.20	\$15.80	\$0.00	\$18.84	\$10.60	\$77.60	\$12.45	\$29.54	\$0.00	\$0.00	\$0.80	\$0.00	\$73.50	\$703.31	\$797.00	\$2,369.90
2020	\$106.17	\$459.86	\$3.60	\$0.00	\$0.00	\$28.00	\$0.00	\$0.66	\$0.00	\$24.63	\$29.30	\$15.46	\$0.00	\$0.00	\$0.00	\$12.80	\$0.00	\$264.82	\$752.20	\$1,697.50
2021	\$4.63	\$454.75	\$0.00	\$0.00	\$0.00	\$0.00	\$57.10	\$0.00	\$40.00	\$45.15	\$0.00	\$14.70	\$6.90	\$0.00	\$0.00	\$0.00	\$0.00	\$376.68	\$229.00	\$1,228.91
2022	\$26.80	\$0.00	\$0.00	\$0.00	\$203.00	\$0.00	\$0.00	\$0.00	\$0.00	\$0.00	\$47.98	\$0.00	\$22.00	\$0.00	\$0.00	\$0.00	\$416.00	\$304.62	\$0.00	\$1,020.40
2023	\$2.40	\$0.00	\$0.00	\$0.00	\$0.00	\$0.00	\$0.00	\$0.00	\$0.00	\$0.00	\$13.80	\$0.00	\$8.50	\$0.00	\$0.00	\$0.00	\$0.00	\$97.60	\$0.00	\$122.30
2024	\$2.80	\$0.00	\$0.00	\$0.00	\$0.00	\$0.00	\$0.00	\$0.00	\$0.00	\$0.00	\$0.00	\$0.00	\$0.00	\$0.00	\$0.00	\$0.00	\$0.00	\$199.70	\$0.00	\$202.50
2025	\$64.00	\$0.00	\$0.00	\$0.00	\$7.50	\$0.00	\$0.00	\$0.00	\$0.00	\$0.00	\$0.00	\$0.00	\$0.00	\$0.00	\$0.00	\$0.00	\$0.00	\$47.00	\$0.00	\$118.50
2026	\$0.00	\$0.00	\$0.00	\$0.00	\$0.00	\$0.00	\$0.00	\$0.00	\$0.00	\$0.00	\$0.00	\$0.00	\$0.00	\$0.00	\$0.00	\$0.00	\$0.00	\$272.75	\$0.00	\$272.75
2027	\$0.00	\$0.00	\$0.00	\$0.00	\$0.00	\$0.00	\$0.00	\$0.00	\$0.00	\$0.70	\$0.00	\$0.00	\$0.00	\$0.00	\$0.00	\$0.00	\$0.00	\$0.00	\$0.00	\$0.70
2028	\$0.00	\$0.00	\$0.00	\$0.00	\$0.00	\$0.00	\$0.00	\$0.00	\$0.00	\$0.00	\$0.00	\$0.00	\$0.00	\$0.00	\$0.00	\$0.00	\$0.00	\$0.00	\$0.00	\$0.00
2029	\$0.00	\$0.00	\$0.00	\$0.00	\$0.00	\$0.00	\$0.00	\$0.00	\$0.00	\$0.00	\$0.00	\$0.00	\$0.00	\$0.00	\$0.00	\$0.00	\$0.00	\$0.00	\$0.00	\$0.00
2030	\$0.00	\$0.00	\$0.00	\$0.00	\$0.00	\$0.00	\$0.00	\$0.00	\$0.00	\$0.00	\$0.00	\$0.00	\$0.00	\$0.00	\$0.00	\$0.00	\$0.00	\$2.01	\$0.00	\$2.01
Total	\$534.29	\$3,899.52	\$138.91	\$493.63	\$371.34	\$1,239.09	\$57.10	\$187.84	\$330.08	\$983.02	\$434.52	\$79.14	\$57.15	\$25.75	\$410.70	\$37.43	\$710.20	\$3,151.27	\$7,486.17	\$20,627.15

The MMU is concerned with the impact of supplemental projects on the market efficiency process. It is not clear how a supplemental project can be used to resolve market efficiency projects that have been identified based on a cost/benefit analysis and why such a project should not be subject to competition. The MMU recommends, to ensure maximum competition, that PJM support ending the exemption of supplemental projects from the Order No. 1000 competitive process.

PJM MISO Interregional Targeted Market Efficiency Process (TMEP)

PJM and MISO developed a process to facilitate the construction of interregional projects in response to the Commissions concerns about interregional coordination along the PJM-MISO seam, called the Targeted Market Efficiency Process (TMEP).³²

The allocation of costs to each RTO for TMEPs will be in proportion to the benefits received.³³

On November 2, 2017, PJM submitted a compliance filing including additional revisions the MISO-PJM JOA to include stakeholder feedback in the TMEP project selection process.^{34 35}

The first TMEP analysis included the investigation of congestion on 50 market to market flowgates. The study resulted in the evaluation of 13 potential upgrades, resulting in the recommendation of five TMEP projects. The five projects address \$59 million in historical congestion, with a TMEP benefit of \$99.6 million. The projects have a total cost of \$20 million, with a 5.0 average benefit/cost ratio. PJM and MISO presented the five recommended projects to their boards in December, 2017, and both boards approved all five projects.³⁶

Transmission Facility Outages

Scheduling Transmission Facility Outage Requests

A transmission facility is designated as reportable by PJM if a change in its status can affect a transmission constraint on any Monitored Transmission Facility or could impede free flowing ties within the PJM RTO and/or adjacent areas.³⁷ When one of the reportable transmission facilities needs to be taken

out of service, the TO is required to submit an outage request as early as possible. The specific timeline is shown in Table 12-42.³⁸

Transmission outages have significant impacts on PJM markets. There are impacts on FTR auctions, on congestion, and on expected market outcomes in the day-ahead and real-time markets. It is important for the efficient functioning of the markets that there be clear, enforceable rules governing transmission outages.

Transmission outages are categorized by duration: greater than 30 calendar days; less than or equal to 30 calendar days and greater than five calendar days; or less than or equal to five calendar days.³⁹ Table 12-41 shows that 75.9 percent of the requested outages were planned for less than or equal to five days and 7.7 percent of requested outages were planned for greater than 30 days in the 2017/2018 planning period. It also shows that 76.9 percent of the requested outages were planned for less than or equal to five days and 7.0 percent of requested outages were planned for greater than 30 days in the 2016/2017 planning period.

All of the outage data in this section in the analysis except for the day-ahead market are for outages scheduled to occur in the planning periods 2016/2017 and 2017/2018, regardless of when they were initially submitted.⁴⁰ The outage data in the analysis for the day-ahead market are for outages scheduled to occur from January 1, 2015, through June 30, 2018.

³² See *PJM Interconnection, LLC*, Docket No. ER17-718-000 (December 30, 2016).

³³ See *PJM Interconnection, LLC*, Docket No. ER17-729-000 (December 30, 2016).

³⁴ See *PJM Interconnection, LLC*, Docket No. ER17-718-000, ER17-721-000 and ER17-729-000 (Not Consolidated) (November 2, 2017).

³⁵ 161 FERC ¶ 61,005.

³⁶ See PJM, "MISO PJM IPSAC," (January 12, 2018) <<http://www.pjm.com/-/media/committees-groups/stakeholder-meetings/ipsac/20180112/20180112-ipsac-presentation.ashx>>.

³⁷ If a transmission facility is not modeled in the PJM EMS or the facility is not expected to significantly impact PJM system security or congestion management, it is not reportable. See PJM, "Manual 3A: Energy Management System (EMS) Model Updates and Quality Assurance (QA), Rev. 13 (September 29, 2017).

³⁸ See PJM, "Manual 3: Transmission Operations," Rev. 52 (Dec. 22, 2017), at 65-66.

³⁹ *Id.* at 70.

⁴⁰ The hotline tickets, EMS tripping tickets or test outage tickets were excluded. The analysis includes only the transmission outage tickets submitted by PJM companies which are currently active.

Table 12-41 Transmission facility outage request summary by planned duration: 2016/2017 and 2017/2018

Planned Duration (Days)	2016/2017		2017/2018	
	Outage Requests	Percent of Total	Outage Requests	Percent of Total
<=5	16,440	76.9%	16,206	75.9%
>5 <=30	3,448	16.1%	3,488	16.3%
>30	1,490	7.0%	1,648	7.7%
Total	21,378	100.0%	21,342	100.0%

After receiving a transmission facility outage request from a TO, PJM assigns a received status to the request based on its submission date and outage planned duration. The received status can be On Time or Late, as defined in Table 12-42.⁴¹

The purpose of the rules defined in Table 12-42 is to require the TOs to submit transmission facility outages prior to the Financial Transmission Right (FTR) auctions so that market participants have complete information about market conditions on which to base their FTR bids and so that PJM can accurately model market conditions.⁴²

Table 12-42 PJM transmission facility outage request received status definition

Planned Duration (Calendar Days)	Request Submitted	Received Status
<=5	Before the first of the month one month prior to the starting month of the outage	On Time
	After or on the first of the month one month prior to the starting month of the outage	Late
> 5 <=30	Before the first of the month six months prior to the starting month of the outage	On Time
	After or on the first of the month six months prior to the starting month of the outage	Late
>30	The earlier of 1) February 1, 2) the first of the month six months prior to the starting month of the outage	On Time
	After or on the earlier of 1) February 1, 2) the first of the month six months prior to the starting month of the outage	Late

41 See PJM. "Manual 3: Transmission Operations," Rev. 52 (Dec. 22, 2017) at 65-66.

42 See "Report of PJM Interconnection, LLC on Transmission Oversight Procedures," Docket No. EL01-122-000 (November 2, 2001).

Table 12-43 shows a summary of requests by received status. In the 2017/2018 planning period, 49.7 percent of outage requests received were late. In the 2016/2017 planning period, 50.2 percent of outage requests received were late.

Table 12-43 Transmission facility outage request summary by received status: 2016/2017 and 2017/2018

Planned Duration (Days)	2016/2017				2017/2018			
	On Time	Late	Total	Percent Late	On Time	Late	Total	Percent Late
<=5	8,471	7,969	16,440	48.5%	8,419	7,787	16,206	48.1%
>5 <=30	1,667	1,781	3,448	51.7%	1,712	1,776	3,488	50.9%
>30	515	975	1,490	65.4%	609	1,039	1,648	63.0%
Total	10,653	10,725	21,378	50.2%	10,740	10,602	21,342	49.7%

Once received, PJM processes outage requests in priority order: emergency transmission outage request; transmission outage requests submitted on time; and transmission outage request submitted late. PJM retains the right to deny all transmission outage requests that are submitted late unless the request is an emergency.

Outages with emergency status will be approved even if submitted late after PJM determines that the outage does not result in Emergency Procedures. PJM cancels or withholds approval of any outage that results in Emergency Procedures.⁴³ Table 12-44 is a summary of outage requests by emergency status. Of all outage requests scheduled to occur in the 2017/2018 planning period, 12.6 percent were for emergency outages. Of all outage requests scheduled to occur in the 2016/2017 planning period, 13.2 percent were for emergency outages.

43 PJM. "Manual 3: Transmission Operations," Rev. 52 (Dec. 22, 2017) at 81.

Table 12-44 Transmission facility outage request summary by emergency: 2016/2017 and 2017/2018

Planned Duration (Days)	2016/2017				2017/2018			
	Emergency	Non Emergency	Total	Percent Emergency	Emergency	Non Emergency	Total	Percent Emergency
<=5	2,186	14,254	16,440	13.3%	2,051	14,155	16,206	12.7%
>5 Et <=30	433	3,015	3,448	12.6%	399	3,089	3,488	11.4%
>30	199	1,291	1,490	13.4%	248	1,400	1,648	15.0%
Total	2,818	18,560	21,378	13.2%	2,698	18,644	21,342	12.6%

PJM will approve all transmission outage requests that are submitted on time and do not jeopardize the reliability of the PJM system. PJM will approve all transmission outage requests that are submitted late and are not expected to cause congestion on the PJM system and do not jeopardize the reliability of the PJM system. Each outage is studied and if it is expected to cause a constraint to exceed a limit, PJM will flag the outage ticket as “congestion expected.”⁴⁴

After PJM determines that a late request may cause congestion, PJM informs the Transmission Owner of solutions available to eliminate the congestion. For example, if a generator planned or maintenance outage request is contributing to the congestion, PJM can request that the Generation Owner defer the outage. If no solutions are available, PJM may require the Transmission Owner to reschedule or cancel the outage.

Table 12-45 is a summary of outage requests by congestion status. Of all outage requests submitted to occur in the 2017/2018 planning period, 7.5 percent were expected to cause congestion. Of all the outage requests that were expected to cause congestion, 3.6 percent (58 out of 1,602) were denied by PJM in the 2017/2018 planning period and 19.6 percent (314 out of 1,602) were cancelled (Table 12-47). Of all outage requests submitted to occur in the 2016/2017 planning period, 8.9 percent were expected to cause congestion. Of all the outage requests that were expected to cause congestion, 4.1 percent (77 out of 1,893) were denied by PJM in the 2016/2017 planning period and 19.0 percent (360 out of 1,893) were cancelled (Table 12-47).

⁴⁴ PJM added this definition to Manual 38 in February 2017. PJM. “Manual 38: Operations Planning,” Rev. 11 (Feb. 1, 2018) at 20.

Table 12-45 Transmission facility outage request summary by congestion: 2016/2017 and 2017/2018

Planned Duration (Days)	2016/2017				2017/2018			
	Congestion Expected	No Congestion Expected	Total	Percent Congestion Expected	Congestion Expected	No Congestion Expected	Total	Percent Congestion Expected
<=5	1,389	15,051	16,440	8.4%	1,094	15,112	16,206	6.8%
>5 Et <=30	373	3,075	3,448	10.8%	357	3,131	3,488	10.2%
>30	131	1,359	1,490	8.8%	151	1,497	1,648	9.2%
Total	1,893	19,485	21,378	8.9%	1,602	19,740	21,342	7.5%

Table 12-46 shows the outage requests summary by received status, congestion status and emergency status. In the 2017/2018 planning period, 37.1 percent of requests were submitted late and were nonemergency while 1.4 percent of requests (296 out of 21,342) were late, nonemergency, and expected to cause congestion. In the 2016/2017 planning period, 37.1 percent of request were submitted late and were nonemergency while 1.9 percent of requests (403 out of 21,378) were late, nonemergency, and expected to cause congestion.

Table 12-46 Transmission facility outage request summary by received status, emergency and congestion: 2016/2017 and 2017/2018

Received Status	2016/2017				2017/2018			
	Congestion Expected	Congestion No Expected	Total	Percent of Total	Congestion Expected	Congestion No Expected	Total	Percent of Total
Late								
Emergency	114	2,687	2,801	13.1%	85	2,592	2,677	12.5%
Non Emergency	403	7,521	7,924	37.1%	296	7,629	7,925	37.1%
On Time								
Emergency	2	15	17	0.1%	3	18	21	0.1%
Non Emergency	1,374	9,262	10,636	49.8%	1,218	9,501	10,719	50.2%
Total	1,893	19,485	21,378	100.0%	1,602	19,740	21,342	100.0%

Once PJM processes an outage request, the outage request is labelled as Submitted, Received, Denied, Approved, Cancelled by Company, PJM Admin Closure, Revised, Active or Complete according to the processed stage of a request.⁴⁵ Table 12-47 shows the detailed process status for outage requests only for the outage requests that are expected to cause congestion. Status Submitted and status Received are in the In Process category and status Cancelled by Company and status PJM Admin Closure are in the Cancelled category in Table 12-47. Table 12-47 shows that of all the outage requests that were expected to cause congestion, 3.6 percent (58 out of 1,602) were denied by PJM in the 2017/2018 planning period, 70.7 percent were complete and 19.6 percent (314 out of 1,602) were cancelled. Of all the outage requests that were expected to cause congestion, 4.1 percent (77 out of 1,893) were denied by PJM in the 2016/2017 planning period, 72.0 percent were complete and 19.0 percent (360 out of 1,893) were cancelled.

Table 12-47 Transmission facility outage requests that might cause congestion status summary: 2016/2017 and 2017/2018

Received Status	2016/2017						2017/2018					
	Cancelled	Complete	In Process	Denied	Congestion Expected	Percent Complete	Cancelled	Complete	In Process	Denied	Congestion Expected	Percent Complete
Late												
Emergency	10	103	0	1	114	90.4%	11	74	0	0	85	87.1%
Non Emergency	71	280	8	44	403	69.5%	46	220	9	18	296	74.3%
On Time												
Emergency	0	1	0	0	2	50.0%	2	1	0	0	3	33.3%
Non Emergency	279	979	74	32	1,374	71.3%	255	837	79	40	1,218	68.7%
Total	360	1,363	82	77	1,893	72.0%	314	1,132	88	58	1,602	70.7%

There are clear rules defined for assigning On Time or Late status for submitted outage requests in both the PJM Tariff and PJM Manuals.⁴⁶ However, the On Time or Late status only affects the priority that PJM assigns for processing the outage request. Table 12-47 shows that in the 2016/2017 planning period, many (69.5 percent or 280 out of 403) outages that were nonemergency, expected to cause congestion, and late transmission outages were approved and completed compared to (74.3 percent or 220 out of 296) in the 2017/2018 planning period. The expected impact on congestion is the basis for PJM's treatment of late outage requests. But there is no rule or clear definition of this congestion analysis in the PJM Manuals. The MMU recommends that PJM draft a clear definition of the congestion analysis required for transmission outage requests to include in Manual 3 after appropriate review.

⁴⁵ See PJM Markets & Operations, PJM Tools "Outage Information," <<http://www.pjm.com/markets-and-operations/etools/oasis/system-information/outage-info.aspx>> (2017).

⁴⁶ OA Schedule 1 § 1.9.2.

Rescheduling Transmission Facility Outage Requests

A TO can reschedule or cancel an outage after initial submission. Table 12-48 is a summary of all the outage requests planned for the planning periods 2016/2017 and 2017/2018 which were approved and then cancelled or rescheduled by TOs at least once. If an outage request was submitted, approved and subsequently rescheduled at least once, the outage request will be counted as Approved and Rescheduled. If an outage request was submitted, approved and subsequently cancelled at least once, the outage request will be counted as Approved and Cancelled. In the 2017/2018 planning period, 31.5 percent of transmission outage requests were approved by PJM and then rescheduled by the TOs, and 12.3 percent of the transmission outages were approved by PJM and subsequently cancelled by the TOs. In the 2016/2017 planning period, 30.5 percent of transmission outage requests were approved by PJM and then rescheduled by the TO, and 10.9 percent of the transmission outages were approved by PJM and subsequently cancelled by the TO.

Table 12-48 Rescheduled and cancelled transmission outage request summary: 2016/2017 and 2017/2018

Planned Duration (Days)	2016/2017				2017/2018					
	Outage Requests	Approved and Rescheduled	Percent Approved and Rescheduled	Approved and Cancelled	Percent Approved and Cancelled	Outage Requests	Approved and Rescheduled	Percent Approved and Rescheduled	Approved and Cancelled	Percent Approved and Cancelled
<=5	16,440	3,478	21.2%	2,061	12.5%	16,206	3,542	21.9%	2,328	14.4%
>5 Et <=30	3,448	2,031	58.9%	213	6.2%	3,488	2,090	59.9%	225	6.5%
>30	1,490	1,009	67.7%	55	3.7%	1,648	1,085	65.8%	63	3.8%
Total	21,378	6,518	30.5%	2,329	10.9%	21,342	6,717	31.5%	2,616	12.3%

If a requested outage is determined to be late and TO reschedules the outage, the outage will be reevaluated by PJM again as On Time or Late.

A transmission outage ticket with duration of five days or less with an On Time status can retain its On Time status if the outage is rescheduled within the original scheduled month.⁴⁷ This rule allows a TO to reschedule within the same month with very little notice.

A transmission outage ticket with a duration exceeding five days with an On Time status can retain its On Time status if the outage is rescheduled to a future month, and the revision is submitted by the first of the month prior to the revised month in which the outage will occur.⁴⁸ This rescheduling rule is much less strict than the rule that applies to the first submission of outage requests with similar duration. When first submitted, the outage request with a duration exceeding five days needs to be submitted before the first of the month nine months prior to the month in which the outage was expected to occur.

The MMU recommends that PJM reevaluate all transmission outage tickets as On Time or Late as if they were new requests when an outage is rescheduled and apply the standard rules for late submissions to any such outages.

⁴⁷ PJM. "Manual 3: Transmission Operations," Rev. 52 (Dec. 22, 2017) at 70.

⁴⁸ *Id.*

Long Duration Transmission Facility Outage Requests

PJM rules (Table 12-42) define a transmission outage request as On Time or Late based on the planned outage duration and the time of submission. The rule has stricter submission requirements for transmission outage requests planned for longer than 30 days. In order to avoid the stricter submission requirement, some transmission owners divided the duration of outage requests longer than 30 days into shorter segments for the same equipment and submitted one request for each segment. The MMU recommends that PJM not permit transmission owners to divide long duration outages into smaller segments to avoid complying with the requirements for long duration outages.

Table 12-49 shows that there were 12,714 transmission equipment planned outages in the 2017/2018 planning period, of which 1,680 were planned outages longer than 30 days, and of which 244 or 1.9 percent were scheduled longer than 30 days if the duration of the outages were combined for the same equipment. The duration of those outages could potentially be longer than 30 days, however were divided into shorter periods by transmission owners.

Table 12-49 Transmission outage summary: 2016/2017 and 2017/2018

Planned Duration (Days)	Divided into Shorter Periods	2016/2017		2017/2018	
		Number of Outages	Percent of Total	Number of Outages	Percent of Total
> 30	No	1,288	10.1%	1,436	11.3%
	Yes	247	1.9%	244	1.9%
<= 30		11,237	88.0%	11,034	86.8%
Total		12,772	100.0%	12,714	100.0%

Table 12-50 shows the details of potentially long duration (> 30 days) outages when combining the duration of the outages for the same equipment. The actual duration of scheduled outages would be longer than 30 days if the duration of the outages were combined for the same equipment within a period of days. In the 2017/2018 planning period, there would have been 25 outages with a combined duration longer than 30 days that were instead scheduled to occur as shorter outages within a period of more than 31 days and less than 62 days.

Table 12-50 Summary of potentially long duration (> 30 days) outages: 2016/2017 and 2017/2018

Planned Duration (Days)	2016/2017		2017/2018	
	Number of Outages	Percent of Total	Number of Outages	Percent of Total
<=31	4	1.6%	6	2.5%
>31 & <=62	28	11.3%	25	10.2%
>62 & <=93	14	5.7%	18	7.4%
>93	201	81.4%	195	79.9%
Total	247	100.0%	244	100.0%

Transmission Facility Outage Analysis for the FTR Market

Transmission facility outages affect the price and quantity outcomes of FTR Auctions. The purpose of the rules governing outage reporting is to ensure that outages are known with enough lead time prior to FTR Auctions so that market participants can understand market conditions and so that PJM can accurately model market conditions.

There are Long Term, Annual and Monthly Balance of Planning Period auctions in the FTR Market. For each type of auction, PJM includes a set of outages to be modeled.

Annual FTR Market

The Annual FTR Market includes the Annual ARR Allocation and the Annual FTR Auction. When determining transmission outages to be modeled in the simultaneous feasibility test used in the Annual FTR Market, PJM considers all outages with planned duration longer than or equal to two months and may consider outages with planned durations shorter than two months. PJM may exercise significant discretion in selecting outages to be modeled. PJM posts an FTR outage list to the FTR web page usually at least one week before the auction bidding opening day.⁴⁹

In the 2017/2018 planning period, 250 outage requests were included in the annual FTR market outage list and 21,093 outage requests were not included.

⁴⁹ PJM Financial Transmission Rights, "Annual ARR Allocation and FTR Auction Transmission Outage Modeling," <<http://www.pjm.com/~media/markets-ops/ptr/annual-ftr-auction/2017-2018/2017-2018-annual-outage-modeling.ashx>> (February 21, 2017).

In the 2016/2017 planning period, 249 outage requests were included in the annual FTR market outage list and 21,129 outage requests were not included. Table 12-51, Table 12-52, Table 12-53 and Table 12-54 show the summary information on the modeled outage requests and Table 12-55 and Table 12-56 show the summary information on outages that were not included in the Annual FTR Market.

Table 12-51 shows that 3.6 percent of the outage requests modeled in the Annual FTR Market for the 2017/2018 planning period had a planned duration of less than two weeks and that 12.8 percent of the outage requests (32 out of 250) modeled in the Annual FTR Market for the planning period were submitted late according to outage submission rules. It also shows that 4.4 percent of the outage requests modeled in the Annual FTR Market for the 2016/2017 planning period had a planned duration of less than two weeks and that 10.4 percent of the outage requests (26 out of 249) modeled in the Annual FTR Market for the planning period were submitted late according to outage submission rules.

Table 12-51 Annual FTR market modeled transmission facility outage requests by received status: 2016/2017 and 2017/2018

Planned Duration	2016/2017				2017/2018			
	On Time	Late	Total	Percent of Total	On Time	Late	Total	Percent of Total
<2 weeks	10	1	11	4.4%	7	2	9	3.6%
>=2 weeks & <2 months	88	2	90	36.1%	80	9	89	35.6%
>=2 months	125	23	148	59.4%	131	21	152	60.8%
Total	223	26	249	100.0%	218	32	250	100.0%

Table 12-52 shows the annual FTR market modeled outage requests summary by emergency status and received status. All the annual FTR market modeled outages expected to occur in the 2017/2018 planning period were nonemergency outages. Two of the modeled outages expected to occur in the 2016/2017 planning period were emergency outages.

Table 12-52 Annual FTR market modeled transmission facility outage requests by emergency and received status: 2016/2017 and 2017/2018

Received Status	Planned Duration	2016/2017				2017/2018			
		Emergency	Non Emergency	Total	Percent Non Emergency	Emergency	Non Emergency	Total	Percent Non Emergency
On Time	<2 weeks	0	10	10	100.0%	0	7	7	100.0%
	>=2 weeks & <2 months	0	88	88	100.0%	0	80	80	100.0%
	>=2 months	0	125	125	100.0%	0	131	131	100.0%
	Total	0	223	223	100.0%	0	218	218	100.0%
Late	<2 weeks	0	1	1	100.0%	0	2	2	100.0%
	>=2 weeks & <2 months	0	2	2	100.0%	0	9	9	100.0%
	>=2 months	2	21	23	91.3%	0	21	21	100.0%
	Total	2	24	26	92.3%	0	32	32	100.0%

PJM determines expected congestion for both On Time and Late outage requests. A Late outage request may be denied or cancelled if it is expected to cause congestion. Table 12-53 shows a summary of requests by expected congestion and received status. Overall, 12.5 percent (4 out of 32) of all the annual FTR

market modeled outages expected to occur in the 2017/2018 planning period and submitted late were expected to cause congestion. Of all the annual FTR market modeled outages expected to occur in the 2016/2017 planning period and submitted late, 11.5 percent (3 out of 26) were expected to cause congestion.

Table 12-53 Annual FTR market modeled transmission facility outage requests by congestion and received status: 2016/2017 and 2017/2018

Received Status	Planned Duration	2016/2017			2017/2018				
		Congestion Expected	No Congestion Expected	Percent Congestion Expected	Congestion Expected	No Congestion Expected	Percent Congestion Expected		
On Time	<2 weeks	2	8	10	20.0%	3	4	7	42.9%
	>=2 weeks & <2 months	19	69	88	21.6%	21	59	80	26.3%
	>=2 months	29	96	125	23.2%	40	91	131	30.5%
	Total	50	173	223	22.4%	64	154	218	29.4%
Late	<2 weeks	0	1	1	0.0%	0	2	2	0.0%
	>=2 weeks & <2 months	0	2	2	0.0%	1	8	9	11.1%
	>=2 months	3	20	23	13.0%	3	18	21	14.3%
	Total	3	23	26	11.5%	4	28	32	12.5%

Table 12-54 shows that 34.8 percent of outage requests modeled in the annual FTR market for the 2017/2018 planning period and with a duration of two weeks or longer but shorter than two months were cancelled, compared to 35.6 percent for the 2016/2017 planning period. Table 12-54 also shows that 12.5 percent of outages requests modeled in the Annual FTR Market for the 2017/2018 planning period and with a duration of two months or longer were cancelled, compared to 20.9 percent for the 2016/2017 planning period.

Table 12-54 Annual FTR market modeled transmission facility outage requests by processed status: 2016/2017 and 2017/2018

Planned Duration	Processed Status	2016/2017		2017/2018	
		Outage Requests	Percent	Outage Requests	Percent
<2 weeks	In Progress	0	0.0%	0	0.0%
	Denied	0	0.0%	0	0.0%
	Approved	0	0.0%	0	0.0%
	Cancelled	1	9.1%	2	22.2%
	Active	0	0.0%	0	0.0%
	Completed	10	90.9%	7	77.8%
	Total	11	100.0%	9	100.0%
>=2 weeks & <2 months	In Progress	10	11.1%	7	7.9%
	Denied	0	0.0%	2	2.2%
	Approved	0	0.0%	0	0.0%
	Cancelled	32	35.6%	31	34.8%
	Active	0	0.0%	0	0.0%
	Completed	48	53.3%	49	55.1%
	Total	90	100.0%	89	100.0%
>=2 months	In Progress	23	15.5%	29	19.1%
	Denied	0	0.0%	0	0.0%
	Approved	0	0.0%	2	1.3%
	Cancelled	31	20.9%	19	12.5%
	Active	3	2.0%	13	8.6%
	Completed	91	61.5%	89	58.6%
	Total	148	100.0%	152	100.0%

More outage requests were not modeled in the Annual FTR Market than were modeled in the Annual FTR Market. In the 2017/2018 planning period, 250 outage requests were modeled and 21,093 outage requests were not modeled in the Annual FTR Market. In the 2016/2017 planning period, 249 outage requests were modeled and 21,129 outage requests were not modeled in the Annual FTR Market.

Table 12-55 shows that 21.8 percent of outage requests not modeled in the Annual FTR Auction with duration longer than or equal to two months, labelled On Time according to the rules, were submitted after the Annual FTR Auction bidding opening date for the 2017/2018 planning period compared to 18.3 percent in the 2016/2017 planning period.

Table 12-55 Transmission facility outage requests not modeled in Annual FTR Auction: 2016/2017 and 2017/2018

Planned Duration	2016/2017						2017/2018					
	On Time			Late			On Time			Late		
	Before Bidding Opening Date	After Bidding Opening Date	Percent After	Before Bidding Opening Date	After Bidding Opening Date	Percent After	Before Bidding Opening Date	After Bidding Opening Date	Percent After	Before Bidding Opening Date	After Bidding Opening Date	Percent After
<2 weeks	1,483	7,991	84.3%	260	8,803	97.1%	1,350	8,020	85.6%	269	8,560	97.0%
>=2 weeks & <2 months	459	377	45.1%	152	953	86.2%	572	406	41.5%	125	1,038	89.3%
>=2 months	98	22	18.3%	186	345	65.0%	136	38	21.8%	210	369	63.7%
Total	2,040	8,390	80.4%	598	10,101	94.4%	2,058	8,464	80.4%	604	9,967	94.3%

Table 12-56 shows that 72.4 percent of late outage requests which were not modeled in the Annual FTR Auction with duration longer than or equal to two months and submitted after the Annual FTR Auction bidding opening date were approved and completed in the 2017/2018 planning period. It also shows that 79.1 percent of late outage requests which were not modeled in the Annual FTR Auction with duration longer than or equal to two months and submitted after the Annual FTR Auction bidding opening date were approved and completed in the 2016/2017 planning period.

Table 12-56 Late transmission facility outage requests not modeled in Annual FTR Auction and submitted after annual bidding opening date: 2016/2017 and 2017/2018

Planned Duration	2016/2017			2017/2018		
	Completed Outages	Total	Percent Complete	Completed Outages	Total	Percent Complete
<2 weeks	7,385	8,803	83.9%	7,118	8,560	83.2%
>=2 weeks & <2 months	834	953	87.5%	905	1,038	87.2%
>=2 months	273	345	79.1%	267	369	72.4%
Total	8,492	10,101	84.1%	8,290	9,967	83.2%

Although the definition of late outages was developed in order to prevent outages for the planning period being submitted after the opening of bidding in the Annual FTR Auction, the rules have not functioned effectively because the rule has no direct connection to the date on which bidding opens for the Annual FTR Auction. By requiring all long-duration transmission outages to be submitted before February 1, PJM outage submission rules only prevent long-duration transmission outages from being submitted late. The rule does not address the situation in which long-duration transmission outages are

submitted on time, but are rescheduled so that they are late. There is no rule to address the situation in which short-duration outages (duration ≤ 5 days) are submitted on time, but are changed to long-duration transmission outages after the outages are approved and active. The Annual FTR Auction model may consider transmission outages planned for longer than two weeks but less than two months. Those outages not only include long duration outages but also include outages shorter than 30 days. In those cases, PJM outage submission rules failed to prevent long duration transmission outages from being submitted late. The MMU recommends that PJM modify the rules to eliminate the approval of outage requests submitted or rescheduled after the opening of bidding in the Annual FTR Auction.

Monthly FTR Market

When determining transmission outages to be modeled in the simultaneous feasibility test used in the Monthly Balance of Planning Period FTR Auction, PJM considers all outages with planned duration longer than five days and may consider outages with planned durations shorter than or equal to five days. PJM may exercise significant discretion in selecting outages to be modeled. PJM posts an FTR outage list to the FTR webpage usually at least one week before the auction bidding opening day.⁵⁰ Table 12-57 and Table 12-58 show the summary information on outage requests modeled in the Monthly Balance of Planning Period FTR Auction and Table 12-59 and Table 12-60 show the summary information on outage requests not modeled in the Monthly Balance of Planning Period FTR Auction.

Table 12-57 shows that on average, 30.6 percent of the outage requests modeled in the Monthly Balance of Planning Period FTR Auction were submitted late according to outage submission rules in the 2017/2018 planning period. On average, 30.8 percent of the outage requests modeled in the Monthly Balance of Planning Period FTR Auction were submitted late according to outage submission rules in the 2016/2017 planning period.

Table 12-57 Monthly Balance of Planning Period FTR Auction modeled transmission facility outage requests by received status: 2016/2017 and 2017/2018

Month	2016/2017				2017/2018			
	On Time	Late	Total	Percent Late	On Time	Late	Total	Percent Late
Jun	170	94	264	35.6%	134	116	250	46.4%
Jul	67	57	124	46.0%	83	72	155	46.5%
Aug	77	63	140	45.0%	100	73	173	42.2%
Sep	367	129	496	26.0%	394	125	519	24.1%
Oct	542	195	737	26.5%	598	162	760	21.3%
Nov	365	172	537	32.0%	453	177	630	28.1%
Dec	289	130	419	31.0%	330	142	472	30.1%
Jan	162	90	252	35.7%	194	78	272	28.7%
Feb	162	89	251	35.5%	214	125	339	36.9%
Mar	310	132	442	29.9%	391	168	559	30.1%
Apr	395	162	557	29.1%	444	204	648	31.5%
May	411	165	576	28.6%	396	203	599	33.9%
Avg	276	123	400	30.8%	311	137	448	30.6%

Table 12-58 shows that on average, 18.9 percent of outage requests modeled in the Monthly Balance of Planning Period FTR Auction were cancelled in the 2017/2018 planning period. On average, 20.4 percent of outage requests modeled in the Monthly Balance of Planning Period FTR Auction were cancelled in the 2016/2017 planning period.

⁵⁰ PJM Financial Transmission Rights, "2015/2016 Monthly FTR Auction Transmission Outage Modeling," <<http://www.pjm.com/-/media/markets-ops/fttr/fttr-allocation/monthly-fttr-auctions/2015-2016-monthly-transmission-outages-that-may-cause-infeasibilities.ashx?la=en>> (December 9, 2015).

Table 12-58 Monthly Balance of Planning Period FTR Auction modeled transmission facility outage requests by processed status: 2016/2017 and 2017/2018

Planning Year	Month	In							Total	Percent Cancelled
		Process	Denied	Approved	Cancelled	Revised	Active	Complete		
2016/2017	Jun	18	3	5	51	1	53	133	264	19.3%
	Jul	10	12	2	19	0	41	40	124	15.3%
	Aug	9	1	2	31	0	52	45	140	22.1%
	Sep	47	4	11	85	0	165	184	496	17.1%
	Oct	75	5	19	172	0	196	270	737	23.3%
	Nov	46	1	10	104	0	162	214	537	19.4%
	Dec	25	4	11	87	0	66	226	419	20.8%
	Jan	35	0	7	60	0	75	75	252	23.8%
	Feb	22	2	4	42	1	87	93	251	16.7%
	Mar	48	2	9	94	0	120	169	442	21.3%
	Apr	55	2	7	101	1	154	237	557	18.1%
	May	26	1	18	134	0	119	278	576	23.3%
	Avg	35	3	9	82	0	108	164	400	20.4%
2017/2018	Jun	19	5	5	52	0	64	105	250	20.8%
	Jul	11	2	8	25	0	54	55	155	16.1%
	Aug	10	0	1	27	0	64	71	173	15.6%
	Sep	67	8	13	100	3	161	167	519	19.3%
	Oct	77	2	27	142	0	201	311	760	18.7%
	Nov	39	5	10	121	2	177	276	630	19.2%
	Dec	42	4	9	97	0	74	246	472	20.6%
	Jan	29	6	9	59	0	80	89	272	21.7%
	Feb	33	1	3	63	1	108	130	339	18.6%
	Mar	66	5	15	114	3	171	185	559	20.4%
	Apr	55	1	20	115	0	202	255	648	17.7%
	May	20	11	16	108	0	145	299	599	18.0%
	Avg	39	4	11	85	1	125	182	448	18.9%

Table 12-59 shows that on average, 10.1 percent of outage requests not modeled in the Monthly Balance of Planning Period FTR Auction, labeled On Time according to the rules, were submitted after the monthly FTR auction bidding opening dates in the 2017/2018 planning period, compared to 10.1 percent in the 2016/2017 planning period. On average, 70.1 percent of outage requests not modeled in the Monthly Balance of Planning Period FTR Auction, labeled Late according to the rules, were submitted after the Monthly Balance of Planning Period FTR Auction bidding opening dates in the 2017/2018 planning period, compared to 70.7 percent in the 2016/2017 planning period.

Table 12-59 Transmission facility outage requests that are not modeled in Monthly Balance of Planning Period FTR Auction: 2016/2017 and 2017/2018

	2016/2017						2017/2018					
	On Time			Late			On Time			Late		
	Before Bidding Opening Date	After Bidding Opening Date	Percent After	Before Bidding Opening Date	After Bidding Opening Date	Percent After	Before Bidding Opening Date	After Bidding Opening Date	Percent After	Before Bidding Opening Date	After Bidding Opening Date	Percent After
Jun	694	103	12.9%	335	895	72.8%	642	96	13.0%	305	852	73.6%
Jul	274	74	21.3%	251	698	73.6%	294	48	14.0%	245	608	71.3%
Aug	413	92	18.2%	259	733	73.9%	341	28	7.6%	211	651	75.5%
Sep	964	156	13.9%	292	772	72.6%	860	83	8.8%	256	599	70.1%
Oct	1,092	89	7.5%	430	901	67.7%	988	87	8.1%	346	867	71.5%
Nov	887	57	6.0%	389	832	68.1%	820	78	8.7%	365	791	68.4%
Dec	600	48	7.4%	340	723	68.0%	610	68	10.0%	324	693	68.1%
Jan	429	38	8.1%	243	592	70.9%	567	72	11.3%	286	746	72.3%
Feb	462	25	5.1%	301	674	69.1%	596	46	7.2%	340	700	67.3%
Mar	1,068	94	8.1%	357	806	69.3%	1,077	210	16.3%	340	802	70.2%
Apr	1,140	103	8.3%	340	789	69.9%	1,217	105	7.9%	449	849	65.4%
May	1,142	155	12.0%	356	966	73.1%	1,238	114	8.4%	467	1,080	69.8%
Avg	764	86	10.1%	324	782	70.7%	771	86	10.1%	328	770	70.1%

Table 12-60 shows that on average, 68.4 percent of late outage requests which were not modeled in the Monthly Balance of Planning Period FTR Auction, submitted after the Monthly Balance of Planning Period FTR Auction bidding opening dates, were approved and complete in the 2017/2018 planning period, compared to 69.5 percent in the 2016/2017 planning period.

Table 12-60 Late transmission facility outage requests that are not modeled in Monthly Balance of Planning Period FTR Auction and submitted after monthly bidding opening date: 2016/2017 and 2017/2018

	2016/2017			2017/2018		
	Completed Outages	Total	Percent Complete	Completed Outages	Total	Percent Complete
Jun	639	895	71.4%	627	852	73.6%
Jul	476	698	68.2%	410	608	67.4%
Aug	523	733	71.4%	473	651	72.7%
Sep	495	772	64.1%	406	599	67.8%
Oct	644	901	71.5%	595	867	68.6%
Nov	536	832	64.4%	490	791	61.9%
Dec	534	723	73.9%	508	693	73.3%
Jan	401	592	67.7%	493	746	66.1%
Feb	447	674	66.3%	457	700	65.3%
Mar	580	806	72.0%	569	802	70.9%
Apr	575	789	72.9%	560	849	66.0%
May	668	966	69.2%	731	1,080	67.7%
Avg	543	782	69.5%	527	770	68.4%


Transmission Facility Outage Analysis in the Day-Ahead Energy Market

Transmission facility outages also affect the energy market. Just as with the FTR Market, it is critical that outages that affect the operating day are known prior to the submission of offers in the Day-Ahead Energy Market so that market participants can understand market conditions and so that PJM can accurately model market conditions in the day-ahead market. PJM requires transmission owners to submit changes to outages scheduled for the next two days no later than 09:30 am.⁵¹

In order to analyze the market impact, the outage requests that affect the operating day are compared: before the day-ahead market is closed; when the day-ahead market save cases are created; and during the operating day. The list of approved or active outage requests before the day-ahead market is closed is the view of outages available to market participants. The day-ahead market model uses a list of outages as an input. The list of outages that actually occurred during the operating day are the outages that affect the real-time market. If the three sets of outages are the same, there is no potential impact on markets. If the three sets of outages differ, there is a potential impact on markets.

For example for the operating day of May 5, 2018, Figure 12-4 shows that: there were 443 approved or active outages seen by market participants before the day-ahead market was closed; there were 329 outage requests included in the day-ahead market model; there were 315 outage request included in both sets of outage; there were 128 outage requests approved or active before the day-ahead market was closed but not included as inputs in day-ahead market model; and there were 14 outage requests included in day-ahead market model but not available to market participants prior to the day-ahead market.

Figure 12-4 Illustration of day-ahead market analysis: May 5, 2018

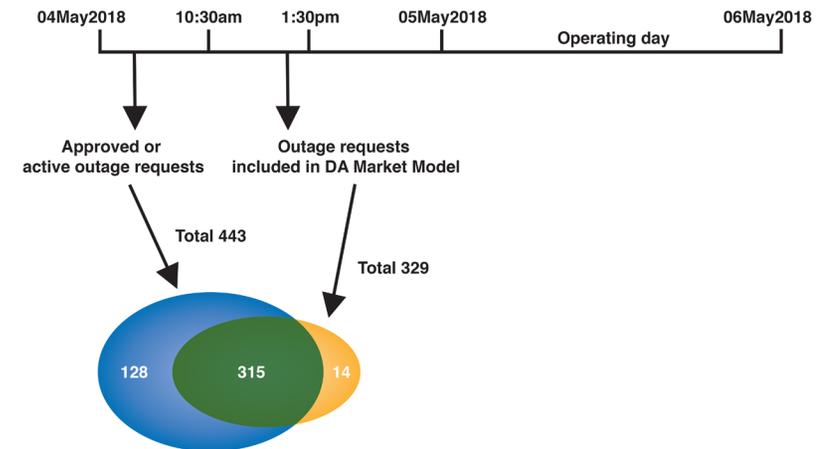

⁵¹ PJM. "Manual 3: Transmission Operations," Rev. 52 (Dec. 22, 2017) at 74

Figure 12-5 compares the weekly average number of active or approved outages available to market participants prior to the close of the day-ahead market with the outages included as inputs to the day-ahead market by PJM.

Figure 12-5 Approved or active outage requests: January 2015 through June 2018

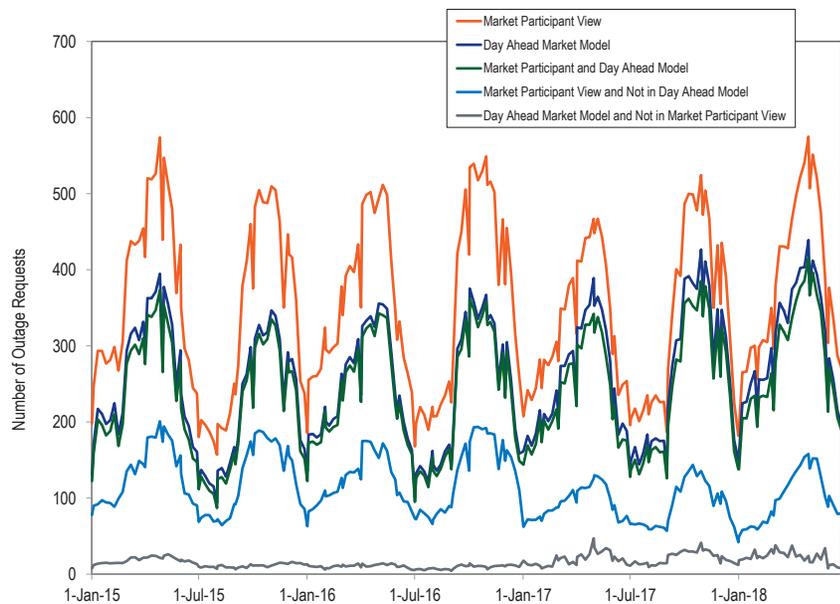


Figure 12-6 compares the weekly average number of outages included as inputs to the day-ahead market by PJM with the outages that actually occurred during the operating day.

Figure 12-6 Day-ahead market model outages: January 2015 through June 2018

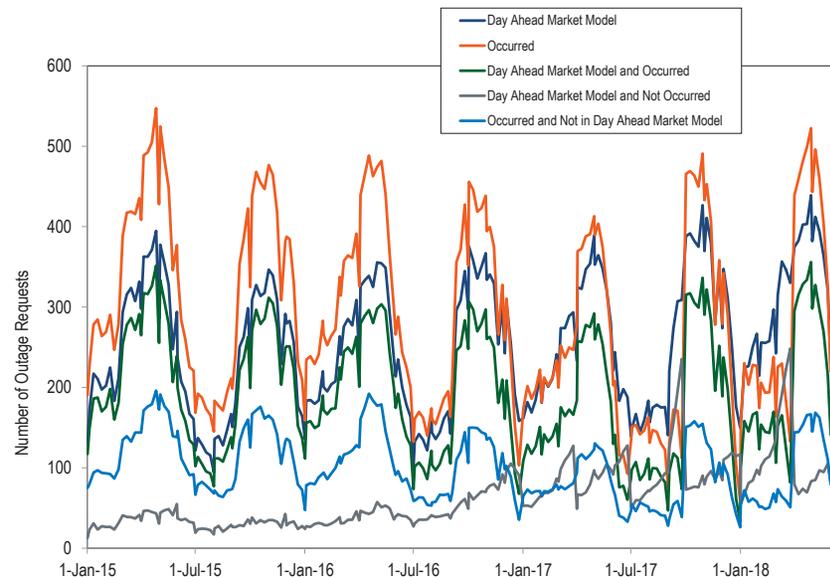


Figure 12-7 compares the weekly average number of active or approved outages available to market participants prior to the close of the day-ahead market with the outages that actually occurred during the operating day.

Figure 12-7 Approved or active outage requests: January 2015 through June 2018

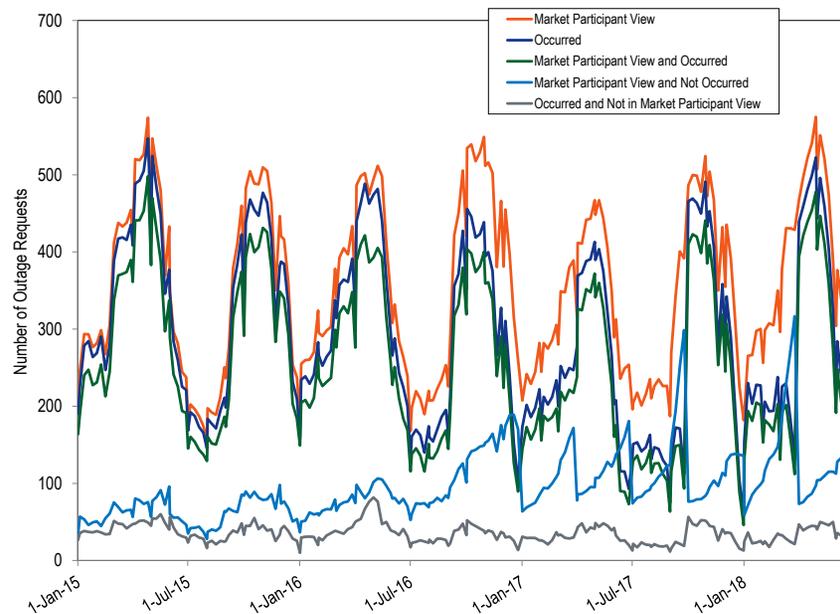


Figure 12-5, Figure 12-6, and Figure 12-7 show that on a weekly average basis, the active or approved outages available to day-ahead market participants, the outages included as inputs in the day-ahead market model and the outages that actually occurred in real time are not consistent. The active or approved outages available to day-ahead market participants are more consistent with the outages that actually occurred in real time than with the outages included in the day-ahead market model.

